

Paper Titles

Effect of DE-GMAW (Double Electrode Gas Metal Arc Welding)'s Resistance on Mechanical and Physical Properties of Aluminium Alloy Weld

454



Abstract:

This paper presented the effect of DE-GMAW (Double electrode gas metal arc welding) resistance on mechanical and physical properties of aluminium alloy welded. DE-GMAW is a method of welding process that use two electrode. A non consumable torch is added to bypass the current in order to reduce the heat input. The variation resistance used were 15 Ω , 30 Ω and 45 Ω . Universal testing machine and Vickers microhardness were used to measured mechanical properties of weld metals with respect to strength and hardness. The microstructure was investigated by microscope optic with 100 x magnification. The grain size of weld metals with resistance value 30 Ω is finer than 15 Ω and 45 Ω . Dye penetrant test shows DE-GMAW welding machine that made have good performance because it can produce welding joint without surface crack. The results show that resistance values optimum to DE-GMAW welding on aluminium alloy 5051 with 4 mm thickness is 30 Ω . It can be seen from the tensile test that shows the highest tensile strength is found in the DE-GMAW welding with resistance values 30 Ω .

Access through your institution

ADD TO CART

Info:

Periodical:

Key Engineering Materials (Volume 789)

Edited by:	Prof. Mosbeh Kaloop and Jongwan Hu
Pages:	64-68
DOI:	https://doi.org/10.4028/www.scientific.net/KEM.789.64
Citation:	Cite this paper
Online since:	November 2018
Authors:	Yustiasih Purwaningrum* , Medilla Kusriyanto , Rudi Kurniawan , Okto Akbar Rizky
Keywords:	Aluminium , DE-GMAW , Resistance
Export:	RIS , BibTeX
Price:	39,00 €
Permissions:	Request Permissions
Share:	

* - Corresponding Author

References

Cited by

Related Articles

DISTRIBUTION & ACCESS

FOR PUBLICATION

INSIGHTS

DOWNLOADS

ABOUT US

POLICY & ETHICS

CONTACT US

IMPRINT

[PRIVACY POLICY](#)

[SITEMAP](#)

[ALL CONFERENCES](#)

[ALL SPECIAL ISSUES](#)

[ALL NEWS](#)

Scientific.Net is a registered brand of Trans Tech Publications Ltd
© 2022 by Trans Tech Publications Ltd. All Rights Reserved

Search

Journals

Engineering Research

Advanced Engineering Forum

Applied Mechanics and Materials

Engineering Innovations

Journal of Biomimetics, Biomaterials and Biomedical Engineering

International Journal of Engineering Research in Africa

Materials Science

Advanced Materials Research

Defect and Diffusion Forum

Diffusion Foundations and Materials Applications

Journal of Metastable and Nanocrystalline Materials

Journal of Nano Research

Key Engineering Materials

Materials Science Forum

Nano Hybrids and Composites

Solid State Phenomena

Engineering Series

Advances in Science and Technology

Construction Technologies and Architecture

Books

Special Book Collections

Foundations of Materials Science and Engineering

Scientific Books Collection

Specialized Collections

Retrospective Collection

Key Engineering Materials - Editorial Board

ISSN: 1662-9795

Details

Volumes

Editorial Board

Founding Editor

Fred H. Wohlbiert

Editor(s) in Chief

Assoc. Prof. Dr. Cecilia Poletti

ORCID

Graz University of Technology, Institute of Materials Science, Joining and Forming; Kopernikusgasse 24/1,
Graz, A-8010, Austria;

Prof. Dr. José Manuel Torralba

[ORCID](#)

Universidad Carlos III de Madrid, IMDEA Materials; Av. Universidad 30, Leganés, 28911, Spain;

Editorial Board

Prof. Aldo Roberto Boccaccini

University of Erlangen-Nürnberg, Institute of Biomaterials, Department of Materials Science and Engineering; Cauerstrasse 6, Erlangen, 91058, Germany;

Prof. Mónica Campos

[ORCID](#)

University Carlos III de Madrid, Department of Materials Science and Engineering; Av. Universidad 30, Leganés-Madrid, 28911, Spain;

Dr. Li Chang

University of Sydney, School of Aerospace, Mechanical and Mechatronic Engineering; Sydney, Australia, 2006;

Prof. Yi Bing Cheng

[ORCID](#)

Monash University, Department of Materials Science and Engineering; PO Box 197, Caulfield East, Australia, 3145;

Prof. Ilaria Cristofolini

[ORCID](#)

University of Trento, Department of Industrial Engineering; Via Sommarive 9, Povo, 38123, Italy;

Prof. Robert Danzer

Montanuniversität Leoben, Institut für Struktur- und Funktionskeramik; Peter-Tunner-Strasse 5, Leoben, A-8700, Austria;

Prof. Suong Van Hoa

Concordia University, Department of Mechanical and Industrial Engineering; 1455 Demaisonneuve West # EV 4-145, Montreal, Canada, H3G1M8;

Prof. Xiao Zhi Hu

University of Western Australia, School of Mechanical and Chemical Engineering; Perth, Australia, WA 6009;

Prof. Mohamed A. Taha

Ain-Shms University, Department of Design and Production Engineering, Faculty of Engineering; Khalifa El-Maamon st, Abbasiya sq., Cairo, Egypt, 11566;

Prof. Alejandro Ureña Fernandez

Universidad Rey Juan Carlos (URJC), Department of Materials Science and Engineering; Tulipan s/n
28933, Mostoles, Madrid, Spain;

Prof. Dragan P. Uskokovic

Institute of Technical Sciences of the Serbian Academy of Sciences and Arts; Knez Mihailova 35/IV,
Belgrade, Serbia;

Prof. Maria Teresa Vieira

ORCID

Universidade de Coimbra, ICEMS - Instituto de Ciência e Engenharia de Materiais e Superfícies ; Pólo II-
Pinhal de Marrocos, Coimbra, 3030-788, Portugal;

Prof. Zhi Rui Wang

University of Toronto, Department of Materials Science and Engineering; 184 College Street, Toronto,
Canada, M5S 3E4;

Prof. Ming Xing Zhang

University of Queensland, School of Mechanical and Mining Engineering; St. Lucia, Queensland,
Australia, QLD 4072;

[DISTRIBUTION & ACCESS](#)

[FOR PUBLICATION](#)

[INSIGHTS](#)

[DOWNLOADS](#)

[ABOUT US](#)

[POLICY & ETHICS](#)

[CONTACT US](#)

[IMPRINT](#)

[PRIVACY POLICY](#)

[SITEMAP](#)

[ALL CONFERENCES](#)

[ALL SPECIAL ISSUES](#)

[ALL NEWS](#)

Volumes

Key Engineering Materials Vol. 789

DOI: <https://doi.org/10.4028/www.scientific.net/KEM.789>ToC: [Table of Contents](#)[<](#) [1](#) [2](#) [3](#) [4](#) [>](#)

Paper Title

Page

[The Efficiency of Phosphorus Removal of Synthetic Wastewater through Struvite Crystallization in an Aerated Fluidized Bed Reactor](#)

59

Authors: Susmardi Masti Casoni, Chandra Wahyu Purnomo, Muslikhin Hidayat

Abstract: The high organic material contained in wastewater released into the environment as results of various sources of human activities, [...more](#)

[Effect of DE-GMAW \(Double Electroda Gas Metal Arc Welding\)'s Resistance on Mechanical and Physical Properties of Aluminium Alloy Weld](#)

64

Authors: Yustiasih Purwaningrum, Medilla Kusriyanto, Rudi Kurniawan, Okto Akbar Rizky

Abstract: This paper presented the effect of DE-GMAW (Double electrode gas metal arc welding) resistance on mechanical and physical [...more](#)

-
- Numerical Analysis of Mix Proportion of Self-Compacting Concrete Compared to Ordinary Concrete** 69
Authors: Ming Lei Zhao, Xin Xin Ding, Jie Li, David W. Law
Abstract: Steel fiber reinforced concrete (SFRC) is developed traditionally from ordinary concrete admixed with randomly distributed
[...more](#)
-
- A Basic Numerical Peening Indentation Model with Geometric Indenter Based on Dynamic Impact Analysis** 76
Authors: Taeh Yung Kim, Nam Ju Lee
Abstract: As shot peening is widely used to improve the crack resistance of various metals, it is important to have an accurate
[...more](#)
-
- The Effect of Botanical Pesticide Extract Addition on the Nutrient Release of Fertilizer from Poultry Manure** 82
Authors: Amelia Sandra Oky, Chandra Wahyu Purnomo, Panut Mulyono
Abstract: Slow release fertilizer with pesticide (SRFP) has been formulated to provide nutrient enriched with pesticide using all natural
[...more](#)
-
- Modification of Chemical Properties of Shellac with Glycerol and Acrylic Acid** 87
Authors: Harry Marareza, Rochmadi, Sarto Sarto
Abstract: Shellac is a natural product which has been presumed as a fragile polymer due to its chemical properties. The objective of this
[...more](#)
-
- An Efficient Method for Decoloration of Inulin from Jerusalem Artichoke by Macroporous Resin** 92
Authors: Hong Yun Zhang, Li Na Yang, Dan Shi Zhu, He Liu
Abstract: The decoloration method for Inulin from Jerusalem artichoke with activated carbon and macroporous resin was investigated in this
[...more](#)
-
- Natural Zeolite Effect on Liquid Product Characteristics of Hydrothermal Treatment** 98
Authors: Chandra Wahyu Purnomo, Tarbiyatun Nasyin Maleiva Lalak, Sarto Sarto
Abstract: Indonesia has an abundant resource of natural zeolite due to its geological location in volcano pathway. This material has been
[...more](#)

Solid Biofuel Production from Meranti (*Shorea Sp.*) Sawdust Using Hydrothermal Treatment

104

Authors: Indah Astieningsih Mappapa, Ahmad Tawfiequrrahman Yuliansyah

Abstract: In the context of industrialization, wood industry plays an important role as one of the pillar components in building Indonesia
[...more](#)

Influence of Gas Metal Arc Welding Parameter on Lap Joint Properties of SS400 Carbon Steel and SUS304 Stainless Steel

110

Authors: Kittipong Kimapong, Surat Triwanapong

Abstract: SS400/SUS304 steels lap joint was applied in various industries due to flexible and beneficial properties of these dissimilar
[...more](#)

Showing 11 to 20 of 38 Paper Titles



DISTRIBUTION & ACCESS

FOR PUBLICATION

INSIGHTS

DOWNLOADS

ABOUT US

POLICY & ETHICS

CONTACT US

IMPRINT

PRIVACY POLICY

SITEMAP

ALL CONFERENCES

ALL SPECIAL ISSUES

ALL NEWS

Effect of DE-GMAW (Double Electrode Gas Metal Arc Welding)'s Resistance on Mechanical and Physical Properties of Aluminium Alloy Weld

Yustiasih Purwaningrum^{1,a*}, Medilla Kusriyanto^{2,b},
Rudi Kurniawan¹ and Okto Akbar Rizky¹

¹Mechanical Engineering Department, Islamic University of Indonesia,
Jl. Kaliurang Km 14,5 Yogyakarta, Indonesia

²Electrical Engineering Department, Islamic University of Indonesia,
Jl. Kaliurang Km 14,5 Yogyakarta, Indonesia

^ayustiasih.purwaningrum@uii.ac.id, ^bmedilla@uii.ac.id

Keywords: DE-GMAW, Aluminium, Resistance

Abstract. This paper presented the effect of DE-GMAW (Double electrode gas metal arc welding) resistance on mechanical and physical properties of aluminium alloy welded. DE-GMAW is a method of welding process that use two electrode. A non consumable torch is added to bypass the current in order to reduce the heat input. The variation resistance used were 15Ω, 30Ω and 45Ω. Universal testing machine and Vickers microhardness were used to measured mechanical properties of weld metals with respect to strength and hardness. The microstructure was investigated by microscope optic with 100 x magnification. The grain size of weld metals with resistance value 30Ω is finer than 15Ω and 45Ω. Dye penetrant test shows DE-GMAW welding machine that made have good performance because it can produce welding joint without surface crack. The results show that resistance values optimum to DE-GMAW welding on aluminium alloy 5051 with 4 mm thickness is 30Ω. It can be seen from the tensile test that shows the highest tensile strength is found in the DE-GMAW welding with resistance values 30Ω.

Introduction

The great challenge in the automotive industry is to reduce vehicle weight by using a light aluminum alloy with excellent corrosion resistance for fabrication the car body [1, 2]. The reducing of weight will improve the fuel efficiency [3-5]. On the other side aluminum has low melting point so that in the joint by using the welding process required a low value of heat input.

A structure of Double Wire Gas Metal Arc Welding (DW-GMAW) which laid foundation for current Double Electrode-Gas Metal Arc Welding (DE-GMAW) were proposed by Ashton and Steinert (1954) [6]. Person and Ruzek (1956) improve DW-GMAW and proposed a tandem system [7]. Prof Zhang (2010) put forward a new method of DE-GMAW. DE-GMAW is a new welding process that used GTAW (Gas Tungsten Arc Welding) torch was added into GMAW system. With the bypass part of the current through the base metal the heat input was reduced [8]. The heat input could be well controlled by controlling the bypass current. This method used to aim the low heat input and the welding current should not exceed the maximum limit

Experimental

Welding System. The base metal in the dimension of 150 mm x 50 mm x 4 mm and the composition of materials provided in Table 1. The main welding parameters are listed in Table 2. The welding process used DE-GMAW (Fig. 1).

Table 1. Chemical composition of Al 5051 (% wt).

Element	Si	Fe	Cu	Mn	Zn	Ti	Cr	Pb	Ni	Sn	Al
Content	0.06	0.2351	0.043	> 1.8924	0.0353	0.0045	0.192	0.0029	0.0009	0.0052	Balanced

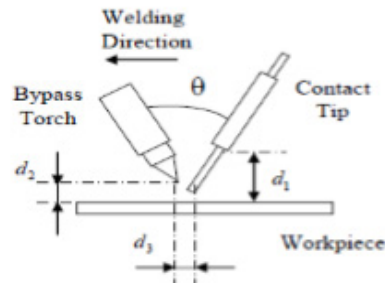


Fig. 1. Schematic of DE-GMAW Process [9].

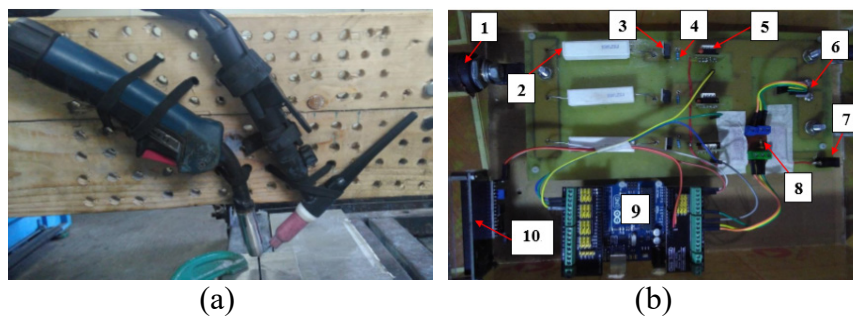


Fig. 2. Double Electrode Gas Metal Arc Welding
 (a) Mechanism of DE-GMAW, (b) Control system DE-GMAW.

where, 1 = Plug Welding Connector, 2 = Resistor 15 W 1,2 Ω, 3 = Mosfet, 4 = Resistor 10 KΩ, 5 = Gate Driver, 6 = Current sensor, 7 = DC Power Jack, 8 = Low Pas Filter, 9 = Mikrokontroler, 10 = LCD + LCD i2c.

Table 2. Processing Parameters.

Processing Parameters	Details	
Diameter	Filler Wire	0.9 mm
	Bypass tungsten	1.2 mm
	Root-sided tungsten	1.2 mm
Speed	Welding	0.312 m/min
	Wire Feeding	5.1 m/min
Current and Voltage	Filler melting current	100 A
	Bypass current	35 A
	Voltage	14 V
Flow rate (Argon)	MIG torch	15 L/min
Distance and Angle	Contact tip to workpiece	10 mm
	Bypass tungsten to workpiece	4 – 6 mm
	Root-sided tungsten to workpiece	1.5 mm
	Bypass tungsten to wire tip	2 – 5 mm

Physical and Mechanical Properties. The mechanical properties of butt joint were tested according to the standard of ASTM E-8. A universal testing machine was used to test the tensile strength of weld joint. Three tensile specimens were prepared in each variation of resistances to obtain an average mechanical values. The measurement of hardness was used Vickers microhardness. The microhardness carried a load of 100 gr.

The physical properties examined with dye penetrant inspection and microstructure. The dye penetrant inspection used to locate surface-breaking defects in weld joint. Dye penetrant is fast, economical and widely used non destructive test method to detect surface-breaking discontinuities. Penetrant test is based upon the principles of capillary action where liquid penetrates into a cavity.

Microscope optic was used to examine microstructure of weld metals. The metallography samples were sectioned, ground, polished and etched. The etched that used was HF.

Results and Discussions

Dye Penetrant. The results of dye penetrant inspection are presented in Fig. 3. Dye penetrant test results show that weld metal for all resistance has good quality because no cracks seen on the surface.

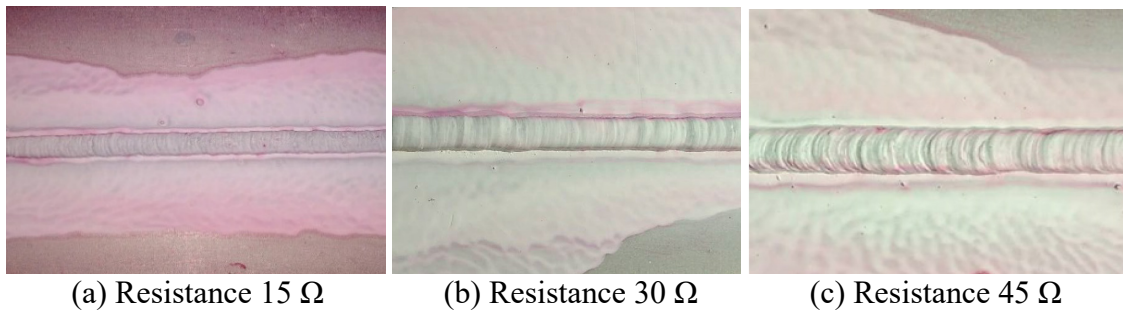


Fig. 3. Dye penetration specimen.

Microstructure. Fig. 4 shows microstructure of weld metals. That were no signification in microstructure of DE-GMAW weld metals with variation of resistance. The grain size of weld metals with resistance value 30Ω is finer than 15Ω and 45Ω. The substantial grain growth has occurred with proper values of heat input [10].

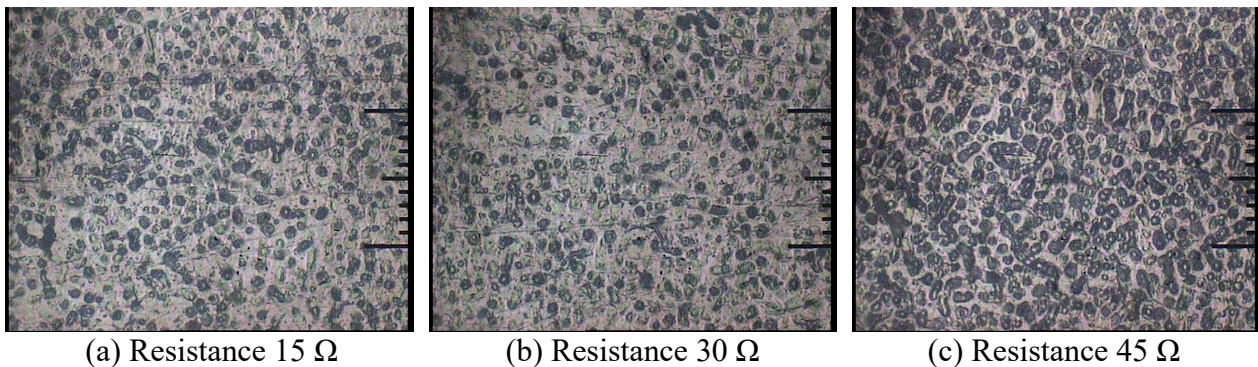


Fig. 4. Microstructure of Weld Metals.

Tensile Strength. Fig. 5 Shows the tensile strength of DE-GMAW welded with variataaion of resistance. The diagram shows that tensile strength of weld metals with resistance 30 Ω has highest value. This value is 44.54 % higher than weld metals with resistance 45Ω and 18.52 % higher than weld metals 15Ω. The tensile strength of weld metals is correlated with the grain size of microstructure.

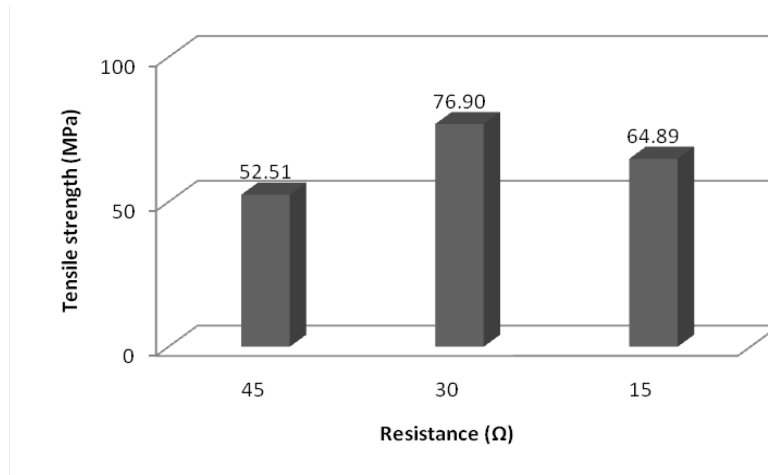


Fig. 5. Tensile strength of welding metals.

Hardness. The hardness of base metal, HAZ and weld metal of DE-GMAW welded with variation of resistance is given in Fig. 6. The weld metal is harder than raw material followed by HAZ (Heat Affected Zone). For all variation resistance, there were no significant trend difference the hardness number of base metal, HAZ and weld metal of aluminium alloy 5051 because it is non-heat-treatable material.

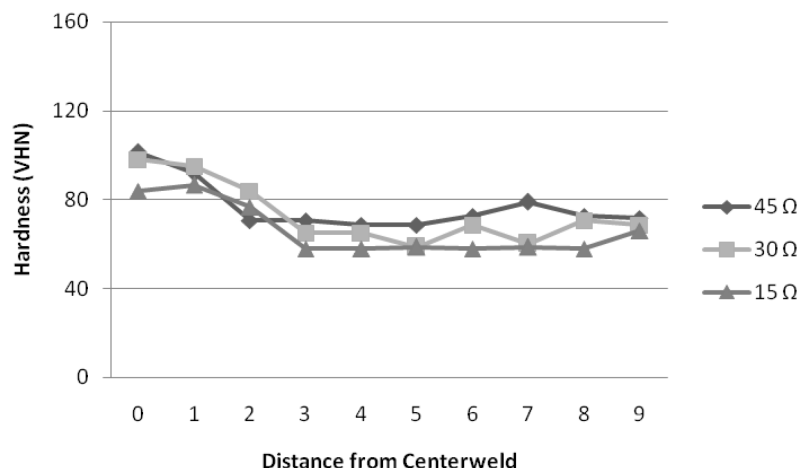


Fig. 6. Distribution of hardness.

Summary

The characteristics involving the variation in resistance values of DE-GMAW process for aluminum alloy were systematically investigated with conclusions drawn as follows:

- Welding machine that made in this research have good performance because it can produce welding joint without surface crack.
- The optimum resistance values to DE-GMAW welding on aluminium alloy 5051 with 4 mm thickness is 30 Ω .
- The tensile strength of weld metals with resistance 30 Ω has highest value.
- There were no significant trend difference the hardness number of base metal, HAZ and weld metal of aluminium alloy 5051 because it is non-heat-treatable material.

References

- [1] K. J. Lee, S. Kumai, T. Arai, T. Aizawa, Interfacial microstructure and strength of steel/aluminium alloy Lap joint fabricated by magnetic pressure seam welding, *Mater. Sci.* 471 (2007) 95-101.
- [2] T. Watanabe, H. Takayama, A. Yanagisawa, Joining of aluminium alloy to steel by friction stir welding, *J. Mater. Proc. Tech.* 178 (2006) 342-349.
- [3] R. Qiu, S. Satonaka, C. Iwamoto, Effect of interfacial reaction layer continuity on the tensile strength of resistance spot welded joints between aluminium alloy and steel. *Mater. Des.* 30 (2009) 3686-3689.
- [4] L. H. Shah, M. Ishak, Review of research progress on aluminium-steel dissimilar welding, *J. Mater. Manuf. Process.* 29 (2014) 928-933.
- [5] M. M. Atabuki, M. Nikodinovsky, P. Chenier, J. Ma, M. Harooni, R. Kovacevic, Welding aluminium alloys to steel: an overview *J. Manuf. Sci. Prod.* 14 (2014) 59-78.
- [6] P. Yao, J. Xue, K. Zhoo, X. Wang, Q. Xu, Symmetrical transition waveform control on double wire MIG welding, *J. Mat. Pross. Tech.* 229 (2010) 111-120.
- [7] J. A. Person, J. M. Rozek, High speed tandem arc working, US patent 2756311, 1956.
- [8] K. H. Li, and Y. Zhang, Interval model of consumable double electrode gas metal arc welding, *Trans. Sci. Eng.* 7 (2010) 806-813.
- [9] K. H. Li and Y. Zhang. Consumable Double-Electrode GMAW. *Weld. J.* 87 (2008) 11-17.
- [10] S. Mainak, M. Mukheerje, S. K. Singh, J. K. Pal, Effect of double-pulse gas metal arc welding (DP-GMAW) process variables on microstructural constituents and hardness of low carbon steel weld deposits. *J. Manuf. Process.* 31 (2018) 424-439.