Free Fatty Acid Removal on Sludge of Palm Oil using Heterogeneous Solid Catalyst Derived from Palm Empty Fruit Bunch

Arif Hidayat *[‡], Muflih A. Adnan *, Diana ***

* Chemical Engineering Department, Faculty of Industrial Technology, Universitas Islam Indonesia, Jalan Kaliurang km 14 Umbulmartani, Ngemplak, Sleman, D.I. Yogyakarta 55584 INDONESIA

(arif.hidayat@uii.ac.id, muflih.adnan@uii.ac.id, diana@uii.ac.id)

[‡]Corresponding Author; Arif Hidayat, Jalan Kaliurang km 14 Umbulmartani, Ngemplak, Sleman, D.I. Yogyakarta 55584 INDONESIA, Tel: +62 274 898 444, Fax: +62 274 895 007, arif.hidayat@uii.ac.id

Received: 18.03.2018 Accepted: 12.04.2018

Abstract- This research investigated the activity of catalysts from biomass waste derived from Palm Empty Fruit Bunch (PEFB). An important factor for assessing the feasibility of biodiesel production is related to its economic evaluation. The sludge of Palm Oil (SPO) is generated from palm oil processing industry. SPO was potential as biodiesel feedstock due to its low price. The investigation of free fatty acid esterification reactions on SPO with methanol was conducted in this research. A new strategy for preparing a heterogeneous solid catalyst from biomass wastes has been developed. The investigation was carried out by varying several parameters, i.e.: the molar ratio of methanol to SPO catalyst to oil (8:1 - 14:1), the amounts of catalyst (0.5 - 5 wt. % SPO), and the reaction temperatures (40 - 60 °C). It is concluded that the optimum conditions of esterification reactions were acquired at molar ratio of methanol to SPO catalyst to oil 14:1, the amounts of catalyst 5 wt. % of SPO, and the reaction temperature of 60 °C.

Keywords Biodiesel, sludge of palm oil, palm empty fruit bunch, biomass waste, esterification, free fatty acid

1. Introduction

The fossil fuel combustion processes emit CO₂ emission which is responsible for climate problem. Many attempts have been conducted to find the renewable energy source for achieving friendly environment [1]. In this regard, biodiesel was considered as a potential candidate for sustainable energy source. Biodiesel was defined as monoalkyl fatty acid ester which can be possibly extracted from animal fat and vegetable oil. It has many benefits compared to fossil fuel such as non-toxic, using renewable feedstock and reduces sulfur compound on exhaust gas. Palm oil [2, 3], palm fatty acid distillate [4], sunflower [5], peanut [6], corn [7], soybean [8], and rapeseed [9] is commonly used as biodiesel feedstock. To produce biodiesel, vegetable or edible oils [3], as well as waste animal fats [10], were reacted with methanol by applying base catalyst. In addition, biodiesel can be obtained through esterification of raw materials with high free fatty acid. The acid catalysts were introduced when esterification reaction was done. The high cost of feedstock was the main constraint associated with biodiesel production. In addition, the edible oil as the biodiesel feedstock competes with the food supply. The production cost of biodiesel can be suppressed by reducing feedstock cost. Some types of feedstock including waste cooking oil [11], non-edible oil [12] and by-products of palm oil industry [13, 14] are receiving more interest due to the economic reasons.

Indonesia has vast palm oil plantations. The palm oil industries generate huge amounts of liquid wastes such as Sludge of Palm Oil (SPO). The SPO price is about a quarter of the price of refined palm oil. SPO considered as feedstock for biodiesel production because it contains fatty acids that allow it to be converted into methyl esters by facilitating the esterification reactions. The utilization of low-cost SPO as feedstock will make biodiesel more competitive as fuel in term of production cost. Meanwhile, reusing by-products will reduce the negative impact of palm industry, at once it will become an opportunity to increase the value of these biomass wastes and realize the environmental sustainability.

Many literatures had studied many materials such as, alkaline earth oxides [15], metal oxides [16], modified polymer [17], zeolites [2,18-19], heteropolyacids [20], Amberlyst-15 [21], heteropolyacid (H₃PW₁₂O₄₀.6H₂O) [22],

INTERNATIONAL JOURNAL of RENEWABLE ENERGY RESEARCH A. Hidayat et al., Vol.8, No.2, June, 2018

tungsten oxide zirconia (WO₃/ZrO₂) [23], hydrotalcite [24], ion exchange [25], carbon based material [13], metal phosphate [26], and metallic zinc and zinc acetate [27] as solid catalysts for esterification reaction. Some common problems that faced by using the conventional heterogeneous acid catalysts have been: the complexity of catalyst synthesis, high cost production and hydrophilic properties of the materials.

The development of novel heterogeneous catalysts using carbon materials from biomass wastes has been intensively studied in last few years. Toda et al. (2005) conducted research on sulfonation of carbon material from sugar. Then, many studies performed research on producing solid catalyst derived from carbon materials such as sugar [29], various carbohydrate [30], glucose - starch [31], glycerol [32], biochar [33], or rice husk ash catalyst [14], coconut-shell activated carbon [34]. The sulfonated carbon-based catalysts have polycyclic carbon atoms that formed a strong chemical bond with the solid surface as active sites. Indeed, the esterification reactions are mainly promoted by the active sites. The existence of functional groups such as carboxyl, phenolic or sulfonic on the carbon surface is capable of incorporating several hydrophilic molecules, for instance, methanol and water [35]. The catalyst activity will increase given the reactant easy to bond with sulfonic groups the hydrophilic molecules on the catalyst surface. The catalyst activity will increase as the reactants bonded easily to the sulfonate group that formed from the incorporation of several hydrophilic properties on a solid surface.

In this study, the preparations of solid catalyst from Palm Empty Fruit Bunch (PEFB) biochar for the esterification reaction of FFAs on SPO were carried out. The characteristics of the PEFB catalyst were analyzed in terms of porosity, FT-IR, the total number of acid sites and elemental analysis. Many parameters, i.e. the reaction temperatures, the molar ratio of methanol to SPO, and the amount of catalyst were investigated to study the catalyst activity. To our best of knowledge, the use of Palm Empty Fruit Bunch biochar as heterogeneous catalysts in biodiesel production is still rare.

2. Material and Methods

2.1. Catalyst synthesis

Palm Empty Fruit Bunch (PEFB) used as raw materials were collected from palm oil plantation in Jambi area, Indonesia. PEFB was first cleaned using distilled water and put in the oven at 110 °C overnight to remove the moisture content. Then, the materials were crushed into small particles and sieved to have uniform size at less than 50 μ m. A muffle furnace was used to obtain PEFB biochar by carbonization process. The samples were carbonized under nitrogen flow at atmospheric pressure. The rate of heating was 20 °C/min and the carbonization process was maintained at 800 °C for 4 h. At the end of the carbonization process, the furnace was naturally brought to ambient temperature. Thereafter, the catalyst was synthesized by preparation of EFB biochar through impregnation method. As the precursor of Zirconia metal, in this research used Zirconium (IV) oxychloride octahydrate (ZrOCl₂.8H₂O). In concise, the biochar that obtained from carbonization of PEFB was mixed with a solution of ZrOCl₂.8H₂O. Hereafter, the mixture was heated up to reflux conditions while constantly stirring for 6 hours. Subsequently, the prepared PEFB catalyst was removed from the metals solution using filtration method. To remove the remaining of the solution in the pore of catalyst, the PEFB catalyst was dried at 120 °C for 24 h on the oven. To attach the sulfonic group in solid surface, a certain mass amount of ammonium sulfate ((NH₄)₂SO₄) were milled in the porcelain mortar with the PEFB catalyst. The mass ratio of ammonium sulfate to PEFB catalyst was 5 to 2. Then, the sulfonated PEFB catalysts were placed on vacuum desiccator for 12 h at atmospheric temperature. Finally, the sulfonated PEFB catalyst was kept in a furnace at 500 °C for 4 h for calcination process.

From the nitrogen adsorption isotherm data, the surface area of the catalyst was measured using the Brunauer– Emmet–Teller (BET) method. The Barret-Joyner-Halenda method (BJH) method was used to estimate total volume and average pore diameter. Analysis of functional groups on the PEFB biochar and catalyst surface was conducted out using FTIR spectroscopy instrument. The compositions of Zr, C, H, O and S molecules on PEFB biochar and catalyst were analyzed by elemental analysis using X-Ray Fluorescence. The Boehm titration sequence was used to calculate the acid strength of the catalyst.

2.1. Catalytic Activity

In the present study, a flat bottom flask (250 mL) was used as the batch reactor. a hot plate and a magnetic stirrer were installed in the reactor for heating the reactor and maintaining the homogeneity of the mixture, respectively. In addition, a condenser and a thermometer were installed in the batch reactor. The reactor was kept in a water bath to maintain the temperature at the constant given reaction temperature. The esterification reaction was conducted initially by pouring the SPO on the reactor. Then the temperature of SPO was raised up to 60 °C. When the temperature of 60 °C was achieved, methanol was added to the reactor followed by the PEFB catalyst. The mixture was stirred vigorously in order to obtain uniform mixing. After 4 hours, the esterification reaction was stopped and the reactor temperature was lowered to the ambient condition. The product of esterification reaction was removed from the PEFB catalyst by filtration method. Then, the liquid mixture was poured in glass funnel followed by adding distilled water. Furthermore, the mixture was settled overnight to allow the separation of biodiesel product from aqueous phase perfectly. The upper layer was fatty acid methyl ester (FAME) compounds (biodiesel product). The remaining methanol was removed by evaporation to obtain pure biodiesel product by using a rotary vacuum evaporator. After that, the product was kept in the storage for further analysis. To study the parameters that influenced the free fatty acids conversion, the molar ratio of methanol to SPO was varied in this research included the amounts of catalyst (0.5 - 5 wt. %of SPO), and reaction temperatures (40 - 60 °C) were studied. To investigate the ability of PEFB catalyst to be

INTERNATIONAL JOURNAL of RENEWABLE ENERGY RESEARCH A. Hidayat et al., Vol.8, No.2, June, 2018

used repeatedly, the esterification reaction was performed in three sequent runs using the same catalyst under the optimum reaction conditions. Before reuse, the PEFB catalyst was regenerated by washed repeatedly using n-hexane to remove organic compounds in the pores of solids. Finally, the catalyst was dried in the oven at 80 °C overnight.

2.2. Analysis of the Sample

The acid value of biodiesel product was determined by an acid-base titration standard procedure. Prior to titration analysis, the water by-product and remaining methanol were evaporated from the sample. Then the purified sample was weighted accurately and dissolved to neutralized ethanol by heating. The indicator that employed in this titration analysis was phenolphthalein. The mixture was stirred until completely dispersed. Then, the mixture was titrated with potassium hydroxide solution so that pink colour can be observed. When the pink color in the mixture persists for at least 10 second, the titration was finished. The acid value (AV) was defined bellow:

$$AV = \frac{56.1 \times V \times N}{m} \tag{1}$$

where:

- V = volume of the consumed potassium hydroxide solution titrant in mL
- N = exact normality of the titrant (potassium hydroxide solution)
- m = mass of the analyzed sample in gram

The conversion of free fatty acid (X_F) was determined by equation as follows:

$$X_F = \left(1 - \frac{AV_t}{AVi}\right) \times 100 \tag{2}$$

where AVi is the acid value of the mixture initially and AV_t is the acid value of mixture after reaction.

3. Material and Methods

3.1. Characterization of catalyst

The physical properties as well as acid density of PEFB biochar and PEFB catalyst are presented in Table 1. The textural properties of the sample including surface area, total pore volume and mean pore size diameter were calculated based on the nitrogen adsorption – desorption data. Table 1 depictes the BET surface area of PEFB biochar was 179.961 m²/g, meanwhile for the PEFB catalyst was 75.852 m²/g. The decreasion of BET surface area was due to the filling of

internal solid pores by zirconia and sulfonate group. It shows the succesfull of impregnation and sulfonation to form active site on the surface of PEFB biochar. The same result also had seen on the total pore volume. The total pore volume of PEFB biochar was 0.2539 cm²/gram which lower compared to PEFB catalyst (0.2580 cm²/gram). Meanwhile, the mean pore size diameter was increased after the PEFB biochar was to synthesize as a solid catalyst. The mean pore size diameter was widening from 2.82 to 6.81 nm that indicate the pore was in mesopore range. Enlargement of catalyst pores will allow reactant molecules to penetrate into the internal catalyst. In addition, the method as described by Boehm was used to determine the quantity of acid site (i.e., sulfonate, carboxyl and phenols functional groups) on the surface of both PEFB biochar and catalyst. The Boehm method was carried out by acid-base back titration. As can be observed in Table 1, the amounts of total acidic groups before and after sulfonation were 1.1 and 4.6 mmol.g⁻¹ respectively. The increasing of total amount of acid groups was due to successful of the sulfonation process which had attached the sulfonate, carboxylic and phenolic functional groups on the surface. Futhermore, the elemental analysis was performed to calculate the amount of Sulfur atoms (attached on the surface of materials. The percentage of contained Sulfur on PEFB catalyst was 4.3% and its significantly larger compared to PEFB biochar. A significant increase in sulfur content on PEFB catalyst indicates that the sulfonic groups are successfully linked to the catalyst surface.

FTIR spectroscopy was used to investigate the existence of various functional groups on the catalyst surface. The spectra of FTIR on PEFB biochar and catalyst were depicted on Fig. 1. As shown in Fig. 1, the bands appearing at 1040 cm⁻¹ attributted to S=O symmetric stretching vibration while S=O asymmetric stretching vibration was shown at wavelength of 1080 cm⁻¹. Meanwhile, the vibrational bands at 1397 cm⁻¹ confirm the asymmetric SO₂ stretching in sulfonate functional groups. The appearance of those vibrational bands on FTIR spectra was proving the introduction of sulfonate functional groups during catalyst synthesis. Furthermore, the band found at 1719 cm⁻¹ was attributed to the C=O stretching on carboxyl functional groups. In the other hand, at wavelength of 1610 cm⁻¹, there is clearly visible the C=C stretching vibration for aromatic structure. The O-H stretching vibrational band on phenolic groups was shown at 3440 cm⁻¹. The analysis of FTIR spectra had confirmed that the PEFB catalyst consist of acidic group such as sulfonate, phenolic, and carboxyl functional groups.

Table 1. Characteristics of PEFB biochar and PEFB catalyst.

Sample	BET surface area	pore size	total pore volume	1	Acid density	(mmol g ⁻	¹)
Sample	$(m^2 g^{-1})$	(nm)	$(cm^3 g^{-1})$	SO ₃ H	COOH	OH	Total
PEFB biochar	179.961	2.82	0.2539	-	0.5	0.6	1.1
PEFB catalyst	75.852	6.81	0.2580	1.9	0.4	2.3	4.6

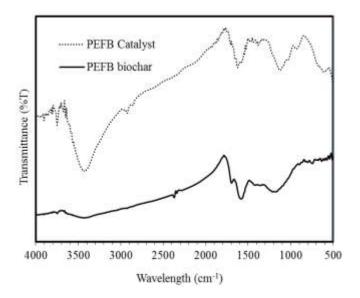


Fig. 1. FTIR Spectra of PEFB biochar and PEFB catalysts.

3.2. Catalytic activity

The Effect of Molar Ratio on FFA Conversion

The esterification reaction is a reaction involving methanol and fatty acids to generate methyl ester as the main product. This reaction runs reversible and every mole of free fatty acid requires one mole of methanol, stoichiometrically. The maximum conversion of the free fatty acids can be achieved by shifting the reaction toward the formation of the product by using excessive reactants. One of the variables that influenced the free fatty acids conversion is the molar ratio of the reactant. The molar ratio of the reactants is the ratio of the moles amounts of reactants involved in the reaction. The molar ratio of methanol to SPO used in this experiment was used between the values of 8:1 to 14:1. Fig. 2 depicts the influence of molar ratio on FFA conversion. It is clearly shown in Fig. 2 that FFA conversion elevated from 75.1 to 80.4% by increasing the molar ratio from 8:1 to 10:1. Furthermore, the molar ratio of methanol to SPO of 12:1, the FFA conversion was 84.8% while the FFA conversion of 87.2% was achieved at the methanol to SPO molar ratio of 14:1. It is concluded that the increase of the molar ratio of methanol to SPO has a positive effect on the FFA conversion.




Fig. 2. The effect of molar ratio methanol to SPO on the FFA conversion (reaction temperature was 60 °C, the reaction time 4 h and catalyst amount of 5 wt. % of SPO).

The Influence of Catalyst Amount

The catalyst that loaded was varied from 0.5 to 5 wt. % of initial SPO mass. Fig. 3 exhibits the influence of catalyst amount on FFA conversion. As shown in Fig. 3, using 0.5 wt. % of initial SPO mass, the FFA conversion achieves 66.8%. When the amount of catalyst was elevated from 1 to 2.5 wt. % of initial SPO mass, the FFA conversion increased from 76.3 to 87.2 %. Further increases of catalyst amount up to 5 wt. % gives FFA conversion attained to 87.2%. From the data, it was concluded that the FFA conversion increases with the addition of catalyst to the reactant mixture. The increasing activity was due to the enhancement of active sites on the surface because of the rise of catalyst amount. Thus, it can be summarized that the highest FFA conversion was reached at the catalyst amount of 5 wt. % of initial SPO mass.




Fig. 3. The Influence of catalyst amounts on the FFA conversion (the reaction temperature was 60 °C, molar ratio of methanol to SPO of 12:1, and reaction time 4 h).

INTERNATIONAL JOURNAL of RENEWABLE ENERGY RESEARCH A. Hidayat et al., Vol.8, No.2, June, 2018

The Effect of the Reaction Temperature

Another important variable that has a strong influence on FFA conversion is reaction temperature. It is worth noting that the reaction temperature was kept below the boiling point of the methanol to avoid the reactants evaporation. Various reaction temperatures were chosen to study the influence of the reaction temperature on FFA conversion i.e. 40, 50, and 60 °C. Fig. 4 depicts the experimental data results of the influence of reaction temperature on FFA conversion.

It can be clearly seen in Fig. 4, the FFA conversion was 71.5% at reaction temperature of 40 °C. Furthermore, when the reaction temperature augmented to 50 °C, the FFA conversion increases to 78.7%. When reaction temperature of 60 °C the highest FFA conversion was achieved at 87.2%. It can be concluded that the rise in reaction temperature would increase the activity of the catalyst and shortened reaction time. Moreover, the esterification reaction is endothermic, so that the reaction temperature also has a strong effect on the FFA conversion.




Fig. 4. The effect of reaction temperature on the FFA conversion (molar ratio of methanol to SPO of 14:1, the reaction time 4 h and catalyst amount of 5 wt. % of SPO).




Fig. 5. Comparison of the activity of the PEFB catalyst during three reaction cycles at three different catalyst amounts (the reaction temperature was 60 °C, methanol to SPO molar ratio was 14:1, catalyst amount of 5 wt. % of SPO and reaction time 4 h).

Reusability

The ability of PEFB catalysts was examined by conducting a series of successive esterification reactions under the same operating conditions. Prior to be used on the subsequent reaction, the PEFB catalyst was removed from the product by filtration. Then the PEFB catalyst was washed using n-hexane to separate the remaining organic compound on the internal pore. Finally, the PEFB catalyst was dried in the oven overnight at 110 °C. The reusability of catalyst was carried out on three consecutive reactions. During the reaction process, the reaction time was maintained at 4 hours, the molar ratio of methanol to SPO was kept at 14:1, the reaction temperatures was remained constant at 60 °C and 5 wt. % of initial SPO mass of catalysts was used. Fig. 5 presents the results of FFA conversion after the catalyst was used repeatedly for three times. As indicated in Fig. 5, the conversion of FFA decreases to 66.4 and 51.3% in the second and third reactions. The decreasing of catalyst substantially was caused by leaching of active site from solid surface.

In Table 2, recently reported literatures on esterification reaction of FFAs using several heterogeneous catalysts with different feedstocks. From the table, the Zirconia/natural zeolite catalyst introduced in the present work is comparable to other research works in term of reaction temperature, alcohol to oil ratio and catalyst amount. In addition, it can be concluded that esterification reaction of FFA using the Zirconia/natural zeolite catalyst gives a high FFA conversion.

Feedstock	Catalyst	Optimum reaction conditions	Conversion (%)	Reference
Palm fatty acid	Sulfonated sugarcane	T = 60 °C, t = 4 h, Methanol/oil = 12:1,	92	[4]
distillate using	bagasse	Catalyst amount= 10wt.%		
Palm fatty acid	Sulfonated coconut	T = 60 °C, t = 4 h, Methanol/oil = 12:1,	87	[13]
distillate using	shell biochar	Catalyst amount= 7wt.%		
Palm oil sludge	ZrO ₂ /SO ₄ ²⁻ - Rice husk	T = 60 °C, t = 4 h, Methanol/oil = 12:1,	83.1	[14]
	ash	Catalyst amount= 10wt.%		
Waste cooking	CaO/SiO ₂ based on	T = 60 °C, t = 1,5 h, Methanol/oil = 14:1,	96	[36]
oil	eggshell/PEFB	Catalyst amount= 8% w/w		
Jatropha curcas	Palm empty fruit bunch	$T = 65^{\circ\circ}C$, $t = 45$ mins, methanol to oil	>98	[37]
	(PEFB) impregnated	ratio= 15:1, 15 wt.% of KOH doped on		
	with KOH	PEFB ash		
Palm oil sludge	Sulphuric acid (H ₂ SO ₄)	T = 60 °C, t = 1 h, Methanol/oil = 8:1,	83.72	[38]
		Catalyst amount= 0.75% wt/wt of H ₂ SO ₄		
Palm oil sludge	Zirconia/natural zeolite	T = 60 °C, t = 4 h, Methanol/oil = 14:1,	87.2	This study
		Catalyst amount= 7wt.%		

Table 2. Comparison several catalysts on esterification reaction of FFAs using different feedstocks.

4. Conclusion

In this work, the performance of PEFB catalyst has been investigated on the esterification of SPO with high FFA. The PEFB catalyst activity was significantly sensitive to (1) the molar ratio of methanol to SPO, (2) the amounts of PEFB catalyst, and (3) reaction temperature. The highest activity of the PEFB catalyst was observed when the reaction was conducted at 60 °C, the methanol to SPO molar ratio of 14:1 and the amounts of PEFB catalyst of 5 wt. % of initial SPO mass. The significant decrease in PEFB catalyst activity was found after three consecutive reactions due to leaching of acid sites. The PEFB as catalysts was an alternative technology to suppress biodiesel production cost and as a strategy to replace the acid homogeneous catalysis in the synthesis of biodiesel.

Acknowledgements

This work is fully supported financially by the Direktorat Riset dan Pengabdian Masyarakat, Direktorat Jenderal Pendidikan Tinggi, Kemenristekdikti, Republik Indonesia through Penelitian Strategis Nasional Institusi (PSNI) research grant Year 2018.

References

- [1] M. A. Adnan, H. Susanto, H. Binous, O. Muraza and M. M. Hossain, "Enhancement of hydrogen production in a modified moving bed downdraft gasifier – A thermodynamic study by including tar", *International Journal of Hydrogen Energy*, vol 42, pp. 10971-85, April 2017.
- [2] P. Intarapong, A. Luengnaruemitchai, S. Jai-In "Transesterification of palm oil over KOH/NaY zeolite in a packed-bed reactor", *International Journal of Renewable Energy Research*, Volume 1, No. 4, pp. 271-280, 2011.
- [3] Y. S. Pradana, A. Hidayat, A. Prasetya, and A. Budiman, "Biodiesel production in a reactive

distillation column catalyzed by heterogeneous potassium catalyst", *Energy Procedia*, vol. 143, pp. 742-747, December 2017.

- [4] V. A. S. Augustia, R. A. Djalal, B. Sutrisno, and A. Hidayat, "Kinetic study of free fatty acid in Palm Fatty Acid Distillate (PFAD) over sugarcane bagasse catalyst", *IOP Conference Series: Earth and Environmental Science*, vol. 105(1), pp. 012065, January 2018.
- [5] A. J. Lopez, I. J. Morales, J. S. Gonzalez and P. M. Torres, "Biodiesel production from sunflower oil by tungsten oxide supported on zirconium doped MCM-41 silica", *Journal of Molecular Catalysis A: Chemical.*, vol. 335, pp. 205-209, February 2011.
- [6] E. G. S. Junior, E. Simionatto, V. H. Perez, O. R. Justo, N. A. H. Zarate and M. C. Vieira, "Potential of Virginia-type peanut (Arachis hypogaea L.) as feedstock for biodiesel production", *Industrial Crops* and Products, vol. 89, pp. 448-454, October 2016.
- [7] M. Sirajuddin, M. Tariq and S. Ali, "Organotin(IV) carboxylates as an effective catalyst for the conversion of corn oil into biodiesel", *Journal of Organometallic Chemistry*, vol. 779, pp. 30-38, March 2015.
- [8] S. Nasreen, H. Liu, D. Skala, A. Waseem and L. Wan, "Preparation of biodiesel from soybean oil using La/Mn oxide catalyst", *Fuel Processing Technology*, vol. 131, pp. 290-296, March 2015.
- [9] B. Wang, S. Li, S. Tian, R. Feng and Y. Meng, "A new solid base catalyst for the transesterification of rapeseed oil to biodiesel with methanol", *Fuel*, vol. 104, pp. 698-703, February 2013.
- [10] D. Kumar and M. C. Math, "Application of Response Surface Methodology for Optimization of Biodiesel Production by Transesterification of Animal Fat with Methanol", *International Journal of Renewable Energy Research*, Volume 6, No. 1, pp. 74-79, 2016.
- [11] S. Gunawardena, D. H. Walpita, M. Ismail, "Method for Quantification of Methanol and Sulfuric Acid Required for Esterification of High Free Fatty Acid Oils in Biodiesel Production", *International Journal of*

Renewable Energy Research, Volume 7, No. 4, pp. 1639-1645, 2017.

- [12] H. Venkatesan, G. John, S. Sivamani, Cotton Seed Biodiesel as Alternative Fuel: Production and its Characterization Analysis using Spectroscopic Studies, *International Journal of Renewable Energy Research*, Volume 7, No. 3, pp. 1333-1339, 2017.
- [13] A. Hidayat, Rochmadi, K. Wijaya and A. Budiman, "Removal of free fatty acid in Palm Fatty Acid Distillate using sulfonated carbon catalyst derived from biomass waste for biodiesel production", *IOP Conference Series: Materials Science and Engineering*, vol. 105(1), pp. 012026, January 2016.
- [14] A. Hidayat, and B. Sutrisno, "Esterification free fatty acid in sludge palm oil using ZrO²/SO₄²⁻ - Rice husk ash catalyst", *AIP Conference Proceedings*, Volume 1840, pp. 050001, May 2017.
- [15] G. Arzamendi, E. Arguinarena, I. Campo, S. Zabala and L.M. Gandia, "Alkaline and alkaline-earth metals compounds as catalysts for the methanolysis of sunflower oil", *Catalysis Today*, vol. 133-135, pp. 305-313, April–June 2008.
- [16] N. Pasupulety, G. L. Rempel and F. T. T. Ng, "Studies on Mg-Zn mixed oxide catalyst for biodiesel production", *Applied Catalysis A: General*, 489, pp. 77-85, January 2015.
- [17] R. A. Soldi, A. R. S. Oliveira, L. P. Ramos and M. A. F. Cesar-Oliveira, "Soybean oil and beef tallow alcoholysis by acid heterogeneous catalysis", *Applied Catalysis A: General*, vol. 361, issues 1-2, pp. 42-48, June 2009.
- [18] W. Xie, X. Huang and H. Li, "Soybean oil methyl esters preparation using NaX zeolites loaded with KOH as a heterogeneous catalyst", *Bioresource Technology*, vol. 98, issue 4, pp. 936-939, March 2007.
- [19] A. Brito, M.E. Borges and N. Otero, "Zeolite Y as a heterogeneous catalyst in biodiesel fuel production from used vegetable oil", *Energy Fuels*, vol. 21 (6), pp. 3280-3283, October 2007.
- [20] A. Alsalme, E. F. Kozhevnikova, and I. V. Kozhevnikov, "Heteropoly acids as catalysts for liquidphase esterification and transesterification", *Applied Catalysis A: General*, vol. 349, pp. 170-176, October 2008.
- [21] M. M. Rahman Talukder, J. C. Wu, S.K. Lau, L. C. Cui, G. Shimin and A. Lim, "Comparison of Novozym 435 and Amberlyst 15 as heterogeneous catalyst for production of biodiesel from palm fatty acid distillate", *Energy Fuels*, vol. 23 (1), 1-4, December 2008.
- [22] X. Zhang, J. Li, Y. Chen, J. Wang, L. Feng and X. Wang, "Heteropolyacid nanoreactor with double acid sites as a highly efficient and reusable catalyst for the transesterification of waste cooking oil", *Energy Fuels*, vol. 23 (9), 4640-4646, July 2009.
- [23] Y. M. Park, J. Y. Lee, S. H. Chung, I. S. Park, S. Y. Lee, and D. K. Kim, "Esterification of used vegetable oils using the heterogeneous WO₃/ZrO₂ catalyst for production of biodiesel", *Bioresource Technology*, vol. 101, issue 1, pp. S59-S61, January 2010.
- [24] Y. T. Wang, Z. Fang, F. Zhang and B. J. Xue, "Onestep production of biodiesel from oils with high acid

value by activated Mg–Al hydrotalcite nanoparticles", *Bioresource Technology*, vol. 193, pp. 84-89, October 2015.

- [25] N. S. Kitakawa, K. Hiromori, T. Ihara, K. Nakashima and T. Yonemoto, "Production of high quality biodiesel from waste acid oil obtained during edible oil refining using ion-exchange resin catalysts", *Fuel*, vol. 139, pp. 11-17, 2015.
- [26] M. D. Serio, M. Cozzolino, R. Tesser, P. Patrono, F. Pinzari, B. Bonelli and E. Santacesaria, "Vanadyl phosphate catalysts in biodiesel production", *Applied Catalysis A: General*, vol. 320, pp. 1-7, March 2007.
- [27] P. Felizardo, J. Machado, D. Vergueiro, M. J. N. Correia, J. P. Gomes and J. M. Bordado, "Study on the glycerolysis reaction of high free fatty acid oils for use as biodiesel feedstock", *Fuel Processing Technology*, vol. 92, pp. 1225-1229, June 2011.
- [28] M. Toda, A. Takagaki, M. Okamura, J.N. Kondo, S. Hayashi and K. Domen, "Green chemistry: biodiesel made with sugar catalyst", *Nature*, vol. 438, pp. 178, November 2005.
- [29] M. H. Zong, Z. Q. Duan, W. Y. Lou, T. J. Smith and H. Wu, "Preparation of a sugar catalyst and its use for highly efficient production of biodiesel", *Green Chemistry*, vol. 9, issue 5, pp. 434-437, February 2007.
- [30] W. Y. Lou, M. H. Zong and Z. Q. Duan, "Efficient production of biodiesel from high free fatty acidcontaining waste oils using various carbohydrate derived solid acid catalysts", *Bioresource Technology*, vol. 99, issue 18, pp. 8752-8758, December 2008.
- [31] G. Chen, and B. Fang, "Preparation of solid acid catalyst from glucose-starch mixture for biodiesel production", *Bioresource Technology*, vol. 102, issue 3, 2635-2640, February 2011.
- [32] B. L. A. P. Devi, K. N. Gangadhar, P. S. S. Prasad, B. Jagannadh and R. B. N. Prasad, "A glycerol- based carbon catalyst for the preparation of biodiesel", *ChemSusChem.*, vol. 2, issue 7, pp. 617-620, July 2009.
- [33] A. Hidayat, Rochmadi, K. Wijaya and A. Budiman, "Reaction kinetics of free fatty acids esterification in palm fatty acid distillate using coconut shell biochar sulfonated catalyst", *AIP Conference Proceedings*, vol. 1699, pp. 050005, December 2015.
- [34] Y. S. Pradana, A. Hidayat, A. Prasetya, and A. Budiman, "Application of coconut-shell activated carbon as heterogeneous solid catalyst for biodiesel synthesis", *Defect and Diffusion Forum*, volume 382, pp. 280-285, January 2018.
- [35] M. Hara, "Biodiesel Production by Amorphous Carbon Bearing SO₃H, COOH and Phenolic OH Groups, a Solid Brønsted Acid Catalyst", *Topics in Catalysis*, vol. 53, issue 11–12, pp 805–810, July 2010.
- [36] M.D. Putra, Y. Ristianingsih, R. Jelita, C. Irawan and I.F. Nata, "Potential waste from palm empty fruit bunches and eggshells as a heterogeneous catalyst for biodiesel production", *RSC Advances*, Issue 87, pp. 55547-55554, December 2017.
- [37] Z. Yaakob, I.S.B. Sukarman, B. Narayanan, S.R.S.Abdullah, M. Ismail, "Utilization of palm empty fruit bunch for the production of biodiesel from

INTERNATIONAL JOURNAL of RENEWABLE ENERGY RESEARCH A. Hidayat et al., Vol.8, No.2, June, 2018

Jatropha curcas oil", *Bioresource Technology*, Volume 104, pp. 695-700, January 2012.

[38] A. Hayyan, Md.Z. Alam, M.E.S.Mirghani, N.A. Kabbashia, N.I.N.M Hakimi, Y. M. Siran, S. Tahiruddin, "Reduction of high content of free fatty acid in sludge palm oil via acid catalyst for biodiesel production", *Fuel Processing Technology*, Volume 92, Issue 5, pp. 920-924, May 2011.



International Journal of Renewable Energy Research-IJRER

HOME ABOUT LOGIN REGISTER SEARCH CURRENT	USER
ARCHIVES ANNOUNCEMENTS	Username ariffhid
Home > Vel 12 No.4 (2022)	Password
Home > Vol 12, No 4 (2022)	🗌 Remember me
International Journal of Renewable	Login
Enormy December (LIDED)	
Energy Research (IJRER)	NOTIFICATIONS
	 <u>View</u> Subscribe
The International Journal of Renewable Energy Research (IJRER) is not a for profit organization. IJRER is a quarterly published, open source journal and operates an online submission with the peer review system allowing authors to submit articles online and track their progress via its web interface. IJRER accepts the DOAJ's definition of open access. In addition; IJRER publication ethics and publication malpractice statement is mainly based on the Code of Conduct and Best-Practice Guidelines for Journal Editors (Committee on Publication Ethics (COPE), 2011)	JOURNAL CONTENT Search Search Scope
IJRER seeks to promote and disseminate knowledge of the various topics and technologies of renewable (green) energy resources. The journal aims to present to the international community important results of work in the fields of renewable energy research, development, application, or design. The journal also aims to help researchers, scientists, manufacturers, institutions, world agencies, societies, etc. to keep up with new developments in theory and applications and to provide alternative energy solutions to current issues such as the greenhouse effect, sustainable and clean energy issues.	Search Browse • <u>By Issue</u> • <u>By Author</u> • <u>By Title</u>

The IJRER journal aims for a publication speed of 90 days from submission until final publication. IJRER uses the LOCKSS archival system and cited in Google Scholar, EBSCO, SCOPUS, and WEB of Science (Clarivate Analytics), CrossRef.

The coverage of IJRER includes the following areas, but not limited to:

- Green (Renewable) Energy Sources and Systems (GESSs) as Wind power, Hydropower, Solar Energy, Biomass, Biofuel, Geothermal Energy, Wave Energy, Tidal energy, Hydrogen & Fuel Cells, Li-ion Batteries, Capacitors
- New Trends and Technologies for GESSs
- Policies and strategies for GESSs
- Production of Energy Using Green Energy Sources
- Applications for GESSs
- Energy Transformation from Green Energy System to Grid
- Novel Energy Conversion Studies for GESSs
- Driving Circuits for Green Energy Systems
- Control Techniques for Green Energy Systems
- Grid Interactive Systems Used in Hybrid Green Energy Systems
- Performance Analysis of Renewable Energy Systems
- Hybrid GESSs
- Renewable Energy Research and Applications for Industries
- GESSs for Electrical Vehicles and Components
- Artificial Intelligence Studies in Renewable Energy Systems
- Computational Methods for GESSs
- Machine Learning for Renewable Energy Applications
- GESS Design
- Energy Savings

FONT SIZE

INFORMATION

For Readers
For Authors

Journal Help

For Librarians

- Sustainable and Clean Energy Issues
- Public Awareness and Education for Renewable Energy
- Future Directions for GESSs
- Thermoelectric Energy

Click Here for Author Guidelines

Click Here for Template for Peer Review Papers

Click Here for Template for Accepted Papers

Online ISSN: 1309-0127

Publisher: Gazi University

IJRER is cited in SCOPUS, EBSCO, WEB of SCIENCE (Clarivate Analytics);

IJRER has been cited in Emerging Sources Citation Index from 2016 in web of science.

WEB of SCIENCE between 2020-2022;

h=29,

Average citation per item=5.4

Impact Factor=(1630+1721+1723)/(189+170+221)=8.74

Category Quartile:Q4

Announcements

Citation of IJRER in WoS

INTERNATIONAL JOURNAL OF RENEWABLE ENERGY RESEARCH

PublisherName: INT JOURNAL RENEWABLE ENERGY RESEARCH

JCR Category	Category Quartile
--------------	-------------------

Source: Journal Citation Reports Learn more 💋

If you have access to Journal Citation Reports [™] through your institution's subscription, you c view the latest Journal Impact Factor [™] and additional metrics to better understand a journal content and audience.

Journal Citation Indicator ™


0.19	0.22
2021	2020

JCI Category	Category Rank	Category Quartile
ENERGY & FUELS in ESCI edition	125/145	Q4

The Journal Citation Indicator is a measure of the average Category Normalized Citation Impa (CNCI) of citable items (articles and reviews) published by a journal over a recent three year p It is used to help you evaluate journals based on other metrics besides the Journal Impact Fac (JIF). Learn more [2]



Times Cited and Publications Over Time

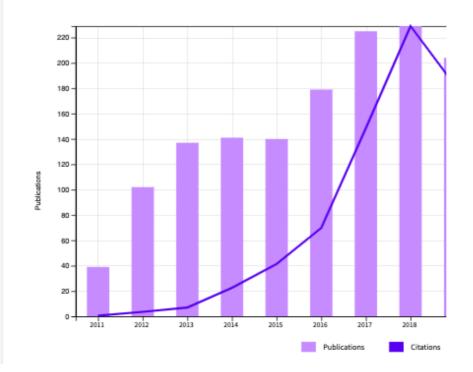

Posted: 2023-02-25

Citation of IJRER in SCOPUS

Posted: 2022-06-12

CiteScore of IJRER in SCOPUS

Quartile: Q2

Posted: 2022-03-07

Aim of IJRER

The *International Journal of Renewable Energy Research* (IJRER) seeks to prome journal aims to present to the international community important results of work researchers, scientists, manufacturers, institutions, world agencies, societies, etc current issues such as the greenhouse effect, sustainable and clean energy issue

Posted: 2021-08-12

www.icSmartGrid.org, June 4-7, 2023, Paris/France

11th International IEEE Conference on Smart Grid, icSmartGrid, is going to be or

Posted: 2023-02-25

Statistics of IJRER in 2023

Year	<u><<</u> 2023
Issues published	0
Items published	0
Total submissions	98
Peer reviewed	33
Accept	7 (21%)
Decline	26 (79%)
Days to review	16
Days to publication	0
Registered users	16780 (1260 new)
Registered readers	14399 (1240 new)
Online ISSN: 1309-0127	
www.ijrer.org	

ijrereditor@gmail.com; ilhcol@gmail.com;

IJRER is cited in SCOPUS, EBSCO, WEB of SCIENCE (Clarivate Analytics)

Posted: 2022-06-12

www.icrera.org, August 29, September 01, 2023, Ankara/Turl

12th International Conference on Renewable Energy Research and Application is

Posted: 2020-12-28

IJRER SCOPUS RECORD 2019-2021

Source title	CiteScore	Highest percentile
International Journal of Renewable Energy Research	3,7	98.0% 98/235 Energy Engineering and Power Techno

Posted: 2021-06-04

IJRER Citation in SCOPUS-2017-2020

2017				2018		
Cite score	SJR	SNIP	Cite score	SJR	SNIP	Cite score
0.94	0.262	0.675	3.4	0.315	0.899	4.4

Posted: 2020-06-06

More Announcements...

Vol 12, No 4 (2022): December

Table of Contents

Articles

IM International JC	burnal of Renewable Energy Research (I
<u>Comparative study of photovoltaic models using sexperimental studies</u> Assane Seck, Mouhamadou Thiam, Maguette S	1704-1711
Wade, Ibrahima Ka Sliding Mode Control of a Photovoltaic Based Shu Filter in Islanding Operation Réné Constant Fanjip, Charles Hubert Kom, Ser Dzonde Naoussi	1712-1726
Optimize Gain Values of PI-Controller for Active P Using Mayfly Algorithm Abdelmoezz Ahmed Eid, Ahmed Mohammed Att Mohammed A Mehanna	1727-1735
AN INVESTIGATION OF PERFORMANCE OF THE S FROM SEVERAL PERSPECTIVES Chetan Arvind Mamulkar, Sanjay Ikhar	<u>SOLAR DRYER</u> <u>PDF</u> 1736-1741
Forecasting Photovoltaic Energy Generation using Perceptron Neural Network Model Kafayat Adeyemi, Victor Eniola, Musa Tanko Za	1742-1753 rmai,
Muhammad Uthman, Godwin Mong Kalu-Uka, E Application of Pressure Swing Adsorption for Carl Methane Enrichment in Biogas Mixture Produced Manure and Organic Waste Raveethida Srimalanon, Pongsakorn Kachapong Usapein	bon Dioxide and PDF from Animal 1754-1759
ANN Based Control of Nineteen Level Modular Vo Converter for Single Stage PV – Grid Integration Ravi Teja S, Kishore Yadlapati	ltage Source PDF 1760-1768
Optimal Sizing of a PV-Battery Stand-Alone Fast Station for Electric Vehicles Using SO Abd El-Fattah A. Omran, Abd El-Shafy A Nafeh, Yousef	1769-1778
Conversion of heat generated during normal PV p into useful energy via a hybrid PV-TEG connection Mohammed A. Qasim, Vladimir I. Velkin, Serge Shcheklein, Sajjad A. Salih, Baseem A. Aljasha Ahmad Sammour	n 1779-1786 by E.
Cascaded Inductively Coupled DSTATCOM for Imp Performance SURESH KUMAR SUDABATTULA, Mrutyunjaya M Suresh Kumar Sudabattula	1787-1796
<u>Thermal and Economic Analysis of Low Cost Wate</u> <u>by Plastic Tub</u> Dr. Aneesh Somwanshi, Y. Anupam Rao	er Heater made PDF 1797-1804
Optimization of Reactive Power Dispatch Conside Uncertainty By Dandelion Optimizer Algorithm Mohammed Hamouda Ali, Ahmed Mohammed A Mohammed Fathy ahmed, Ahmed Hassan Adel	1805-1818
Adequacy of binary fluid and turbulator based na loop in parabolic trough collector Arunachala U Chandavar, Varun K, Chandan D	tural circulation PDF 1819-1830
Synthesis of Titanium Oxide Catalyst with Gold N a Dopant For Ethanol Dehydration Application Sri Mulijani, Rohmat Ismail, Karna Wijaya, Aep Cahyo Wibowo	1831-1836
SPATIO-TEMPORAL MODEL TO ESTIMATE THE AD ROOFTOP SOLAR PHOTOVOLTAIC SYSTEMS Rommel Eduardo Morales, Sergio Patricio Zamb Rios Villacorta, Trajano Javier Gonzalez	1837-1845
Robust Solar Irradiation Forecasting Mechanism f Power Point Trackers: A Comparative Review N. B. SUSHMI, D. Subbulekshmi	for Maximum PDF 1846-1870
Comparison between Quadruple-Sampled State V Derivative Deadbeat Current Controller with a PI Controller in Grid Connected Inverter	

shamsul aizam zulkifli

IVI		Lifelgy Research (ior
for Off-G Yahya	ental Study of an Optimal Power Management Strategy Frid RES/Battery System Aljarhizi, ABDELILAH HASSOUNE, elmehdi al ibrahmi, uahed mesbahi, Mohamed Khafallah, ayoub nouaiti	PDF 1881-1891
electricit	<u>distributed solar energy generation on Uganda's y grid stability</u> Kavuma Kavuma, Diego Sandoval, Khan J D nana	PDF 1892-1903
renovatio	ed management tool for the promotion of energy on on an urban scale D ECHLOUCHI, Mustapha Ouardouz, Abdes-samed ussi	PDF 1904-1919
Load Cor	Rao Chegudi, Balamurugan Ramadoss, RamaKoteswara	PDF 1920-1931
Relays in	Protection Coordination of Directional Overcurrent Microgrids considering Grid-Connected and Islanded ased on User defined Characteristics and Fault Current	PDF 1932-1941
Hassan Elshahe	n Eid Mohamed, Hebatallah Mohamed Sharaf, Mostafa ed, Mohamed Salah Elsobki	
wind turl	e effect of trailing edge flap deflection on horizontal axis bine performance using computational investigation ned B. Farghaly, E. S. Abdelghany	<u>PDF</u> 1942-1953
SVPWM a Motor Dr		<u>PDF</u> 1954-1965
<u>Numerica</u> dynamic	u Sarada, N Ravisankara Reddy <u>al investigation of the energetic-exergetic quasi-</u> <u>performance of mini-channel solar air heaters</u> Aboulmagd, Hesham Othman, Ahmed ElDegwy	<u>PDF</u> 1966-1979
<u>Conducti</u>	d Multilevel Inverter with Minimum Number of ing Switches and Using Capacitor Compensation yo Adi Nagoro, Tarmizi Tarmizi, Ira Devi Sara	<u>PDF</u> 1980-1987
Method	ssion Expansion Planning Using a Novel Meta-Heuristic Ova, Erdi Dogan, Sevki Demirbas	<u>PDF</u> 1988-2001
	nt Energy Management and Prediction of Micro Grid n Based on Machine Learning Algorithms and genetic n	<u>PDF</u> 2002-2014
<u>Experime</u> of the DO Daouda Maham	ned Ali Elweddad, Muhammet Tahir GUNESER ental Validation Under dSPACE of the ANN-PID Control C Link for Injection of Solar Energy to the Grid a Gueye, Alphoussenyi Ndiaye, Amadou Diao, nadou Abdou Tankari, Mamadou Traore, El Hadji Mbaye , Amadou Ba	<u>PDF</u> 2015-2022
<u>Commun</u> Tapas E	Development Counts? Adoption of Biogas in the Rural hities of India- A Review Bagdi, Sreya Ghosh, Anuradha Sarkar, Amit Kumar Srinivasan Balachandran, Shibani Chaudhury	<u>PDF</u> 2023-2042
System v	d Voltage Control Methodology for Smart Distribution with Dispersed Generation naitanya Duvvury, K. Rayudu	2043-2051
Universit Djoko /	<u>Solar Photovoltaic Potential and Carbon Mitigation in</u> <u>y Buildings</u> Adi Widodo, Nur Iksan, Riana Defi Mahadji Putri, iini Mulwinda	<u>PDF</u> 2052-2060
<u>Compara</u> Photovol Hong V	ative Efficiency Assessment Of MPPT Algorithms In taic Systems /iet Phuong Nguyen, Thanh Tung Huynh, Van Tan	PDF 2061-2067
of Steady	n Fuzzy Logic Based GPSO PR Controller for Minimization y State Errors and Harmonics in Standalone Wind and <u>Hybrid System</u>	2068-2081

G. N. S. Vaibhav, B. S. Srikanthan

		lengy research (io
<u>Exci</u> Mo	I-Based SVC for Optimal Performance of Wind-Driven Self- ted Synchronous Reluctance Generator ostafa Rida Mohamed, Adel El Samahy, Essam Rashad, ohamed El Korfolly, Erhab Youssef	PDF 2082-2091
Ca	ack Converter Design for Polymer Based Organic Panels man Akay, Osman YILDIRIM, Hüseyin CALIK, Yusuf OZOGLU, erdar YILMAZ	PDF 2092-2100
Sola	erimental Investigations of a Simple and Cheap Passive or Dryer for Preserving Agricultural Products uhammad Mahamood Hasan, M.M.A. Khan, Ahmed Sayem	PDF 2101-2110
conv	mal design of FoPID controller for DFIG based wind energy version system using Grey-Wolf optimization algorithm JMANTH YAMPARALA, L. Lakshminarasimman, G. Sambasiva 10	PDF 2111-2120
Enh	roved Virtual Inertia Emulation for Frequency Stability ancement in Microgrid System naled M. Alawasa, Banan K. Malahmeh, Ziyad S. Almajali	PDF 2121-2131
Resp Scer	Efficient Rule-Based Control Algorithm for Frequency ponse Ancillary Service with BESS for UK and Turkish Grid narios	PDF 2132-2142
<u>Batt</u> DIg	ıbra Nur Akpinar, Burcu Gundogdu, Okan Ozgonenel <u>ery Energy Storage System Sizing Using PSO Algorithm in</u> <u>SILENT PowerFactory</u> ei Hown Tee, Khaldon Ahmed Qaid, Chin Kim Gan, Pi Hua n	<u>PDF</u> 2143-2151
<u>Algo</u> syst	den Application of Skill Optimization orithm on Cascaded Multi-Level Neuro-Fuzzy based Power em Stabilizers for Damping Oscillations BINANDS RAMSHANKER, SUPRAVA CHAKRABORTY	PDF 2152-2167
<u>Ana</u> Hori Ah	g <u>ration of Machine Learning (ML) and Finite Element</u> <u>lysis (FEA) for Predicting the Failure Modes of a Small</u> <u>zontal Composite Blade</u> umed Ali Farhan Ogaili, Mohsin Noori Hamzah, Mohsin Noori amzah, Alaa Abdulhady Jaber, Alaa Abdulhady Jaber	PDF 2168-2179
<u>cont</u> Sa	ilibrium Optimizer and FLC of Two Area Load Frequency rol with Multi-Source Generators System and A. Mohamed Abdelwahab, Moayed Mohamed, Mohamed weed, Walid S. E. Abdellatif	PDF 2180-2188
syst	rmodynamic analysis for a solar assisted absorption cooling em: Energy and exergy bases erve AKKAYA ÇETINDAG, Ünal ÇAMDALI	PDF 2189-2199
<u>Unb</u> En	alanced Operation in Transformers Used in PV Plants nir Yükselen, Ires Iskender	PDF 2200-2205
Ch	<u>Cycle Analysis of a CO2 Project in Trinidad & Tobago</u> pristopher Arjoon, Selene Hosein, Dr. David Alexander, Dr. ean Maharaj	PDF 2206-2222
prog	<u>rgy management for an AC island microgrid using dynamic</u> g <u>ramming</u> assim Chouaf, Ahmed Abbou, Abdessamade Bouaddi	PDF 2223-2236
Pow	ormance Evaluation and Viability Studies of Photovoltaic er Plants in North Cyprus muel Nii Tackie, Ozgur Cemal Ozerdem	PDF 2237-2247

Online ISSN: 1309-0127

Publisher: Gazi University

IJRER is cited in SCOPUS, EBSCO, WEB of SCIENCE (Clarivate Analytics);

 $\ensuremath{\text{IJRER}}$ has been cited in Emerging Sources Citation Index from 2016 in web of science.

WEB of SCIENCE between 2020-2022;

h=29,

Average citation per item=5.4

Impact Factor=(1630+1721+1723)/(189+170+221)=8.74

Category Quartile:Q4



INTER International Journal of Renewable Energy Research-IJRER

HOME ABOUT LOGIN REGISTER SEARCH CURRENT	USER	
ARCHIVES ANNOUNCEMENTS	Username ariffhid	
Home > About the Journal > People	Password	
People	Remember me Login	
	NOTIFICATIONS	
Editorial Board Prof. Dr. Ilhami COLAK, Gazi University, Editor-in-Chief, IJRER, Turkey	<u>View</u> <u>Subscribe</u>	
Prof. Dr. Seref Sagiroglu, Gazi University, Turkey	JOURNAL	
Prof. Dr. Frede Blaabjerg, Aalborg University Department of Energy Technology, Denmark	CONTENT Search	
Prof. Dr. Fujio Kurokawa, Nagasaki University, Japan	Search Scope	
Prof. Adel M. Nasiri, University of Wisconsin-Milwaukee, United States	All 🗸	
Prof. Dr. Ahmet Masmoudi, Chairman of EVERMONACO Conference, Tunisia	Browse	
Prof. Dr. Jian-Xin Shen, Zhejiang University, China	<u>By Issue</u>	
Prof. Dr. João Martins, Universidade Nova de Lisboa, Portugal	 <u>By Author</u> <u>By Title</u> 	
Prof. Dr. Dan M. Ionel, University of Kentucky, United States	FONT SIZE	
Prof. Dr. Carlo Cecati, University of L'Aquila, Italy	FUNT SIZE	
Prof. Dr. Kenneth Eloghene Okedu, University of Port Harcourt, Nigeria		
<u>Prof. Dr. Innocent Ewaen Agbongiague Davidson</u> , Durban University of Technology, Durban, South Africa	INFORMATION <u>For Readers</u> <u>For Authors</u> <u>For Librarians</u> 	
Prof. Dr. Rosario Miceli, UniNetLab, Universita di Palermo, Italy		
Prof. Dr. Vladimir Katic, NoviSad University, Serbia	Journal Help	
Prof. Dr. Brayima Dakyo, University of Lehavre, France		
Prof. Dr. Vitor Pires, Polytechnic Institute of Setubal, Portugal		
Prof. Dr. Halil Ibrahim BULBUL, Gazi University, Turkey		
Professor Ramazan Bayindir, Gazi University, Faculty of Technology, Turkey		
Prof. Dr. Ishwar Sethi, Oakland University, United States		
Prof. Dr. Birol Kilkis, Baskent University, Turkey		
<u>Prof. Dr. Sofyan A Taya</u> , Islamic University of Gaza, Palestinian Territory, Occupied		
<u>Prof. Sudhakar Babu Thanikanti</u> , INSTITUTE OF POWER ENGINEERING, UNIVERSITI TENAGA NASIONAL MALAYSIA, India		
Prof. Dr. Omer Faruk Bay, Gazi University, Turkey		

Prof. Dr. Yunus Cengel, Yildiz Technical University, Turkey

People

Prof. Dr. Andreas Hornung, University of Birmingham, United Kingdom

Prof. Dr. Zi-Qiang Zhu, The University of Sheffield, United Kingdom

Dr. Onder Eyecioglu, Bolu Abant Izzet Baysal University, Turkey

Prof. Dr. Silviu Ionita, University of Pitesti, Romania

Professor Erdal Irmak, Gazi University, Turkey

<u>Professor Mamadou Lamine Doumbia</u>, University of Quebec at Trois-Rivieres, Canada

Prof. Dr. Slobodan Mircevski, Chairman of EPE-PEMC 2010, Ss. Cyril and Methodius Univ., Macadonia

<u>Prof. Dr. Athanasios N. Safacas</u>, University of Patras, Electromechanical Energy Conversion Laboratory, Greece

Dr. Jorge Guillermo CalderÃ³n-Guizar, Instituto de Investigaciones Eléctricas, Mexico

Prof. Dr. Miguel A. Sanz - Bobi, Comillas Pontifical University, Spain

Prof. Dr. Goce Arsov, Ss. Cyril and Methodius University, Macadonia

Prof. Dr. Ing Youcef Soufi, University of Tabessa, Algeria

Prof. Dr. Bakhyt Matkarimov, Nazarbayev University, Kazakhstan

Prof. Dr. Constantin Filote, University of Suceava, Romania

<u>Prof. dr. sc. Marija Mirosevic</u>, University of Dubrovnik Department of Electrical Engineering and Computing, Croatia

Assoc. Prof. Juan I Arribas, Univ. Valladolid, Spain

Prof. Dr. Sevki Demirbas, Gazi University, Turkey

Prof. Dr. Ramon Blasco-Gimenez, Universidad Politecnica de Valencia, Spain

Prof. Dr. Ibrahim Sefa, Gazi University, Turkey

Prof. Dr. Javier Bilbao, University of Basque Country, Spain

Prof. Dr. Gheorghe-Daniel Andreescu, Politehnica University of Timisoara, Romania

Prof. Dr. Juan W. Dixon, Pontificia Universidad CatÃ³lica de Chile, Chile

Prof. Dr. Ersan Kabalci, Nevsehir University, Turkey

Prof. Dr. Zdenek Cerovsky, Technical University of Prague, Czech Republic

Associate Prof. Dr. Mohamad Taha, Rafik Hariri University, Lebanon

Dr. Nagi Fahmi, Aston University, United Kingdom

Associate Prof. Dr. Hamdi Tolga Kahraman, Karadeniz Technical University, Turkey

Assoc. Prof. Dr. Mehmet Yesilbudak, Nevsehir Haci Bektas Veli University, Turkey

<u>Prof. Shubhransu Sekhar Dash</u>, Government College of Engineering Keonjhar, India

Online ISSN: 1309-0127

Publisher: Gazi University

IJRER is cited in SCOPUS, EBSCO, WEB of SCIENCE (Clarivate Analytics);

IJRER has been cited in Emerging Sources Citation Index from 2016 in web of science.

WEB of SCIENCE between 2020-2022; h=29,

People

Average citation per item=5.4

Impact Factor=(1630+1721+1723)/(189+170+221)=8.74

Category Quartile:Q4



INTER International Journal of Renewable Energy Research-IJRER

HOME ABOUT LOGIN REGISTER SEARCH CURRENT ARCHIVES ANNOUNCEMENTS	USER Username ariffhid Password
Home > Archives > Vol 8, No 2 (2018)	
Vol 8, No 2 (2018)	Login
June DOI: <u>https://doi.org/10.20508/ijrer.v8i2</u>	NOTIFICATIONS
Table of Contents Articles	JOURNAL CONTENT Search
Feasibility analysis of PV/wind/battery hybrid power generation:	PDF 1-671 All ✓ Search
Tunneling Current of an AlGaAs/GaAs Multiple-Quantum-well67Solar Cell Considering a Trapezoidal Potential Barrier67Avigyan Chatterjee, Sayantan Biswas, Amitabha Sinha67	2-681 Browse • <u>By Issue</u> • <u>By Author</u>
Pyrolysis of pearl millet and napier grass hybrid (PMN10TX15): Feasibility, byproducts, and comprehensive characterization68Alessandra Camelo, Divine Angela Genuino, Amado Latayan Maglinao Jr., Sergio Canzana Capareda, Juliana Lobo Paes, Jinjuta Owkusumsirisakul68	• <u>By Title</u> 2-691 FONT SIZE
Optimized Generation Scheduling of Thermal GeneratorsIntegrated to Wind Energy System with Storage69SHUBHAM TIWARI, Bharti Dwivedi, M.P Dave	2-701 INFORMATION • For Readers
Fuzzy Logic Controller Based STATCOM for Grid Connected Wind 70 Turbine System 70 Gundala Munireddy 70	<u>PDF</u> <u>For Authors</u> <u>For Librarians</u>
<u>Optimal Placement of Distributed Generators with Regard to</u> <u>Reliability ‎Assessment using Virus Colony Search Algorithm</u> 71 Sayed Jamal al-Din Hosseini, Mohammadreza Moradian, Hossein Shahinzadeh, Sima Ahmadi	<u>Journal Help</u> <u>PDF</u> 4-723
STUDY OF DEPOSITION TEMPERATURE ON PROPERTIES OF72AGED NANOSTRUCTURED NICKEL OXIDE FOR SOLAR CELLS72Ukoba kingsley72	<u>PDF</u> 4-732
Solar Thermal Desalination: Sustainable Alternative for73Sultanate of Oman73Parimal Sharad Bhambare	PDF 3-751
Investigation of Structural and Modal Analysis of a Wind Turbine75Planetary Gear using Finite Element Method75Abdellah Mohsine75	<u>PDF</u> 2-760
Enhancing Biogas Production from Lime Soaked Corn Cob Residue 76 TAWAF ALI SHAH, Tawaf Ali Shah, Romana Tabassum	<u>PDF</u> 1-766

	/
Probabilistic SCUC Considering Implication of ‎Compressed Air Energy Storage on Redressing Intermittent Load and	<u>PD</u> 767-78
Stochastic Wind Generation Majid Moazzami, Milad Ghanbari, Jalal Moradi, Hossein Shahinzadeh, Gevork B. Gharehpetian	
Investigation of the Line Frequency for Demand-Side Primary Frequency Control Using Behind-the-Meter Home Batteries Ahmed Zurfi, Jing Zhang	<u>PD</u> 784-790
Assessment of Photovoltaic Energy Production at Different Locations in Jordan Saad Sabe Alrwashdeh	<u>PD</u> 797-804
Indian Progress in the Renewable Technologies: A Review on Present Status, Policies, and Barriers Deepthi Kolisetty, Binu Ben Jose D R	<u>PD</u> 805-819
Design and implementation of an integral terminal sliding mode controller for maximum power point tracking karim dahech, Moez Allouche, Tarak Damak, Mehdi Driss	<u>PD</u> 820-829
<u>Virtual Power Plant for a Smart Grid: A Technical Feasibility Case</u> <u>Study</u> Carlos Giron, Shaimaa Omran	<u>PD</u> 830-83
Power Dispatch Strategy for Interconnected Microgrids Based Hybrid Renewable Energy System Marwa Grami	838-850
Power Management Procedures of Electric Vehicle Charging Station Based Grid Tied PV-Battery System ABDELILAH HASSOUNE, MOHAMED KHAFALLAH, ABDELOUAHED MESBAHI, TARIK BOURAGBA	<u>PD</u> 851-860
Online Energy Management Strategy Based On Adaptive Model Predictive Control For Microgrid With Hydrogen Storage Jun MA, Mustafa Baysal	<u>PD</u> 861-87
Control of Bidirectional DC-DC Converter in Renewable based DC Microgrid with Improved Voltage Stability Bharath K R, Harsha Choutapalli, P Kanakasabapathy	871-87
Experimental Evaluation of the Solar Flux Distribution on the Flat Receiver of a Model Heliostat System Prakash Madhukar Gadhe, Shivalingappa N Sapali, Govind N Kulkarni	<u>PD</u> 878-883
A study to investigate the effect of Diethyl ether as additive on the performance and emissions of engine using diesel and Neem oil methyl ester as fuel Nitin Shrivastava, Tejal Sungra	<u>PD</u> 888-894
Simulation and Feasibility Studies of Rooftop PV System for University Campus Buildings in Surabaya, Indonesia Elieser Tarigan	<u>PD</u> 895-908
One-Against-All and One-Against-One Multiclass Support Vector Machine Algorithms for Wind Speed Prediction M. Arif Wani, Heena Farooq Bhat	<u>PD</u> 909-91
Simulation and Performance Comparison of Si and SiC Based on a Proposed H6 Inverter for PV Grid-tied Applications Fahad ALMASOUDI, Mahesh Manandhar, Mohammad Matin	916-928
Correlation between Representative Concentration Pathways and Paris Agreement Stavros Lazarou, Lambros Ekonomou, Athanasios Dagoumas	929-940
Design and development of high efficiency five stage battery charge controller with improved MPPT performance for Solar PV Systems JOYDIP JANA, HIRANMAY SAMANTA, KONIKA DAS BHATTACHARYA, HIRANMAY SAHA	941-953
Solar Residential Rooftop Systems (SRRS) in South Delhi : A Strategic Study with Focus on Potential Consumers' Awareness AKHIL SARIN, Dr. Rahul Gupta, Dr. Vishwajeet V. Jituri	<u>PD</u> 954-96
A Comparative Study of PI, RST and ADRC Control Strategies of a Doubly Fed Induction Generator Based Wind Energy Conversion System	<u>PD</u> 964-973

AIVI VOI 8, NO	2 (2018)
Chakib Mohssine <u>Assessment and mapping of solar energy potential using</u> <u>artificial neural network and GIS technology in the southern pa</u> <u>of India</u> Khalid Anwar, Sandip Deshmukh	<u>PDF</u> art 974-985
Free Fatty Acid Removal on Palm Oil Sludge using Heterogeneous Solid Catalyst derived from Palm Empty Fruit Bunch Arif Hidayat, Muflih Arisa Adnan, Diana Jirjis	<u>PDF</u> 986-993
Comparative Fault Response study of Synchronous Generator i the presence of Wind Generator using Singular Perturbation based Transient Stability Index Sunitha Anup	<u>n</u> 994-1005
<u>High Power Density Battery Charger for Plug-In Micro EV</u> Shinichiro Hattori, Haruhi Eto, Fujio Kurokawa	PDF 1006-1015
Assessment of Renewable Energy Resources in Line with the Targets Specified in the Turkish Strategic Plan and Application the AHP Method Huseyin - Salvarlİ	of 1016-1024
Aerodynamic Performance of Straight-Bladed Vertical Axis Win Turbines: A Practical Open Source Implementation Alejandro José Vitale, Sibila Andrea Genchi, Andrea Paula Rossi, Eduardo Daniel Guillermo, Horacio Raúl di PrÃitula	<u>d</u> <u>PDF</u> 1025-1037
<u>Modelling of a Solar Array Simulator-based on Multiple DC-DC</u> <u>Converters</u> Bassim M.H. Jassim, Harith Jassim, Harith Jassim	1038-1044
Extremely short time modeling of wind power variations Ali Asghar Bagheri, Haidar Samet	PDF 1045-1061
Comparison of Output Power Control Performance of Wind Turbine using PI, Fuzzy Logic and Model Predictive Controllers satyabrata sahoo, Bidyadhar Subudhi, Gayadhar Panda	<u>PDF</u> 1062-1070
<u>A Technical-economic Analysis of Wood Gasification for</u> <u>Decentralized Power Generation in Colombian Forest Cores</u> Juan F. Perez, Luis Osorio, Andrés Agudelo	<u>PDF</u> 1071-1084
<u>A NOVEL SINGLE SWITCH HIGH STEP UP DC-DC CONVERTER</u> FOR PV BASED APPLICATION Arunkumari T, Indragandhi V	<u>PDF</u> 1085-1097
<u>Numerical Study of the Effect of hydrogen addition on the</u> <u>laminar flame speed and premixed flame structure of biogas</u> Carlos Alirio DÃaz GonzÃilez, Mario Jonatan Acero Caballero, Leonardo Esteban Pacheco Sandoval	1098-1104
<u>Thermal kinetics and syngas production on co-gasification of</u> <u>deoiled jatropha seed cake residues with wood chips</u> J THIAGARAJAN, P.K Srividhya, P Balasubramanian	1105-1111
Potentials of Biogas as a Source of Renewable Solomon Uhunamure	PDF 1112-1123
Development and Evaluation of Solar Powered Catamaran for Sustainable Tourism in South east of gulf of Thailand Gunn Panprayun, Suwan Pitaksintorn	<u>PDF</u> 1124-1129
<u>Statistical Model for the Forecast of Hydropower Production in Ecuador</u> MÃ ³ nica Mite-LeÃ ³ n, Julio Barzola-Monteses	1130-1137
Enhancement of Power Quality in Wind Power Distribution System by using Hybrid PSO-Firefly based DSTATCOM Thirupathaiah M	1138-1154
<u>Optimal Economic Operation of Microgrids Integrating Wind</u> <u>Farms and Advanced Rail Energy Storage System</u> Majid Moazzami, Jalal Moradi, Hossein Shahinzadeh, Gevork Gharehpetian, Hasan Mogoei	<u>PDF</u> 1155-1164 B.
<u>Power Quality Improvement in a Three-Phase Grid Tied</u> <u>Photovoltaic System Supplying Unbalanced and Nonlinear Loac</u> Chiraz KHOMSI	<u>PDF</u> ds 1165-1177
Modeling of pyrolycic product violds by artificial poural potwork	

Modeling of pyrolysis product yields by artificial neural networks

<u>PDF</u>

Hasan MERDUN	1178-1188
<u>Coordinated Control Strategy of Distributed Energy Resources</u> <u>based Hybrid System for Rural Electrification</u> SWATI BHAMU, T.S. Bhatti	PDF 1189-1199

Online ISSN: 1309-0127

Publisher: Gazi University

IJRER is cited in SCOPUS, EBSCO, WEB of SCIENCE (Clarivate Analytics);

 $\ensuremath{\text{IJRER}}$ has been cited in Emerging Sources Citation Index from 2016 in web of science.

WEB of SCIENCE between 2020-2022;

h=29,

Average citation per item=5.4

Impact Factor=(1630+1721+1723)/(189+170+221)=8.74

Category Quartile:Q4