Utilization of Modified Coal Fly Ash (CFA) as a Catalyst for Production of Biodiesel from Coconut Oil: Part 1 - Characteristics of the Catalyst

ARIF Hidayat¹, ACHMAD Chafidz^{1,2,a*}, BACHRUN Sutrisno¹

¹Chemical Engineering Department, Universitas Islam Indonesia, Yogyakarta 55584, Indonesia

²Study Center for Material Science and Technology, Chemical Engineering Department, Universitas Islam Indonesia, Yogyakarta 55584, Indonesia

achmad.chafidz@uii.ac.id


Keywords: Coal fly ash, catalyst, transesterification, biodiesel, coconut oil

Abstract. The current research studied about the utilization of modified coal fly ash (CFA) as catalyst for biodiesel production from coconut oil. Coal Fly ash (CFA) is a solid waste that is abundantly available in the coal-based power plant. Coal Fly Ash is a type of material that has high content of oxide minerals, e.g. silicates and silicate alumina. With proper physical/chemical treatment, the coal fly ash can be converted into a heterogeneous catalyst. In this work, the coal fly ash was modified with HCl and Ca(NO₃)₂·4H₂O and used as catalyst for biodiesel production from coconut oil. This paper will focus only on the characteristics of the prepared modified CFA-based catalyst. The modified CFA-based catalyst was characterized for its crystallinity using X-Ray Diffraction (XRD), determined its surface area and pore size distribution using Surface Area Analyzer, and its functional groups by Fourier Transform – Infra Red (FT-IR). The specific surface area of the catalyst (modified CFA) decreased from 28.08 m²/g to 17.54 m²/g after impregnation process of calcium oxide in the raw coal fly ash. This decrease was also accompanied by a decrease in the average pore network from 32.59 Å to 20.31 Å. Additionally, based on the XRD pattern shown, the raw CFA is composed of mostly quartz (SiO₂) and mullite (3Al₂O₃.2SiO₂) minerals, and a small portion of hematite.

Introduction

Biodiesel is an alternative fuel for diesel engine that can be made from vegetable and animal oils that are environmentally friendly. They have the advantage of not containing sulfur and benzene which are carcinogenic. Biodiesel is made from triglycerides and fatty acids from vegetable and animal oils with a chemical reaction called transesterification and esterification. In this process oil is reacted with alcohol with the help of catalysts, both acidic and basic catalysts [1, 2]. One of the raw materials for making biodiesel is coconut. Coconut is the result of plantations in Indonesia that are available throughout the year. Coconut meat contains 40-60% oil [3]. The production of biodiesel from coconut oil is carried out by transesterification reaction. Transesterification is a chemical process that brings together an alkoxy group in an ester group with alcohol [4]. Transesterification is an alcohol transfer reaction from esters by other alcohols that is related to three sequential reversible reactions. Biodiesel synthesis through the transesterification reaction between oil and alcohol takes place according to Fig. 1.

CH ₂ OCOR'			CH₂OH │		RCOOR'
CHOCOR'' +	- ROH	←→	<mark>сн</mark> он 	+	RCOOR"
CH ₂ OCOR'''			CH₂OH		RCOOR'''
Vegetable Oils or Fats	alcohol		glycerol	me	thyl ester (biodiesel)



Where R ', R' ', and R' " are fatty acid alkyl clusters. The constituent fatty acids can be saturated fatty acids and unsaturated fatty acids. Unsaturated fatty acids are fatty acids that have double bonds on carbon bonds, for example oleic acid, linoleic acid. Saturated fatty acids are fatty acids that do not contain carbon bonds in their carbon bonds [5]. There are three conditions for carrying out a transesterification reaction, namely an acid catalyzed reaction, an alkaline catalyzed reaction, or an enzyme catalyzed reaction [6]. Processes that use enzymes as catalysts require a much longer reaction time than other processes. There are three kinds of transesterification processes that are commonly carried out to make biodiesel from vegetable oils, which are: (1) transesterification with basic catalysts, (2) transesterification with direct acid catalysts, (3) conversion of vegetable oils / fats to fatty acids proceed to biodiesel [7]. Almost all biodiesel is produced by the transesterification method using a basic catalyst because it is an economical process and only requires low temperatures and pressures. Transesterification reactions are often carried out using basic catalysts because they produce a reaction rate that is much higher than acidic catalysts. Commonly used catalysts are hydroxide bases such as NaOH and KOH.

So far, the synthesis of biodiesel using a homogeneous catalyst. This catalyst has several disadvantages in its use such as the difficulty of separating the product from the catalyst, resulting in hazardous waste to the environment because the remaining catalyst cannot be reused, and the difficulty of handling and storage. An alternative that can be used is the use of solid (heterogeneous) catalysts. Heterogeneous catalysts have advantages in terms of the separation process after an easier reaction, high activity, can be used repeatedly and a high lifetime, and more environmentally friendly. Coal Fly ash (CFA) is a solid waste that is abundantly available in the coal-based power plant. Coal Fly Ash is a type of material that has high content of oxide minerals, e.g. silicates and silicate alumina. With a proper physical/chemical treatment it can be converted into zeolite-like materials [8, 9].

There have been numerous research studies about modified CFA used as catalyst for biodiesel production. Bhandari, et al. [10] investigated about preparation of mesoporous catalyst made of CFA for soybean oil transesterification. They synthesized waste CFA into different kinds of zeolites. It was reported that the zeolites have size of averagely 2-5 µm with maximum surface area of 727.2 m²/g. Similarly, Manique, et al. [11] also reported about transesterification process for biodiesel production from soy oil using CFA-based sodalite (zeolite) as heterogenenous catalyst. The zeolite type sodalite was prepared via hydrothermal process in alkali medium. Xiang, et al. [12] studied about utilization of modified CFA as a catalyst for biodiesel production from waste cooking oil. In the current research study, modified coal fly ash was utilized as catalyst for synthesis of methyl ester from coconut oil. The CFA was modified using sodium sulphate and sodium hydroxide. The synthesized catalyst was characterized by X-Ray Diffraction (XRD), Fourier Transform-Infra Red (FT-IR), and Surface Area Analyzer.

Experimental

Materials and methods. The coal fly ash obtained from the PLTU was first carried out by grinding and screening to obtain a uniform particle size. The activation process is then carried out by mixing coal fly ash with 3N HCl solution, where the number of components in the reflux system is 50 g of coal fly ash and 500 mL mixture of 3N HCl solution. Reflux is carried out at reflux temperature for 4 hours. Refluxed coal fly ash is then neutralized by adding distilled water to neutral pH. After neutral pH, the fly ash is then roasted for about 2 hours. Then impregnation of Calcium metal is carried out into the activated fly ash material. The impregnation process is by mixing activation fly ash with precursors of Ca(NO₃)₂·4H₂O salt solution. The loading process is carried out at reflux temperature for 8 hours and followed by a drying process to evaporate the solvent. After drying, the fly ash material is then calcined in the furnace at a temperature of 500 °C for 4 hours. The synthesized catalyst (i.e. modified CFA) was then characterized by measuring crystallinity using X-Ray Diffraction (XRD), determining surface area and pore size distribution with Surface Area Analyzer and functional groups by Fourier Transform Infra Red (FTIR).

Results and Discussion

X-Ray Diffraction (XRD) characterization. The results of X-ray diffraction pattern analysis for coal ash are shown in Fig. 2. Based on the XRD pattern shown, raw coal ash is composed of mostly quartz (SiO₂) and mullite ($3Al_2O_3.2SiO_2$) minerals, and a small portion of hematite. The quartz diffraction pattern is shown at $2\theta = 20.86^{\circ}$, 26.65° and 36.5° , while the diffraction peak at $2\theta = 26.3^{\circ}$; 39.4° and 64.9° show the existence of ullite. The formation of mullite is related to the process of burning coal at a power plant at temperatures above 1050 °C. XRD analysis of the catalyst showed a characteristic peak at $2\theta = 29.0^{\circ}$; 32.5° ; 47.5° ; and 54.0° which indicates the presence of calcium oxide (CaO).

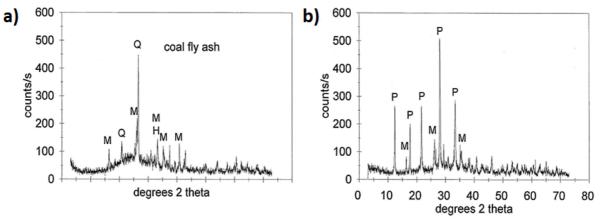


Fig. 2. XRD Analysis Results: (a) fly ash; and (b) catalyst.

Fourier Transform-Infra Red (FT-IR) analysis. To strengthen the results of the analysis of fly ash material characteristics, an analysis was carried out using FT-IR. Spectroscopically, fly ash can be observed in the range of wave numbers $300-1300 \text{ cm}^{-1}$. The wavelength is the main area of tetrahedral bond uptake of the main components making up fly ash, namely SiO₄ and AlO₄. While the results of infra-red spectra analysis for raw fly ash can be seen in Fig. 3. For raw fly ash spectra, it can be seen that the absorption at wave number of 3450 cm^{-1} is characteristic for stretching OH octahedral (OH) strain) of H₂O which is amplified by absorption at wave number of 1641 cm^{-1} which is the deformation absorption of H₂O (OH buckling). Uptake at wave numbers 1047 and and 795 cm^{-1} are asymmetric and asymmetrical strain absorption of external O-Si-O or O-Al-O. Uptake at wave number 461 cm^{-1} is characteristic of Al-O and Si-O bonding.

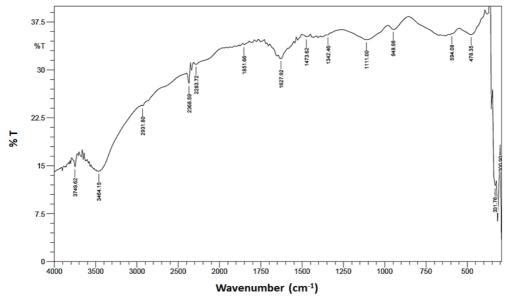


Fig. 3. FT-IR Spectra for Coal Fly Ash (CFA)

Furthermore, to see the effect of acid treatment on the characteristics of functional groups on the surface of the material, a spectral analysis of the activated fly ash is carried out, the results of which can be seen in Fig. 4. From the figure, it can be observed that there is no significant difference in the results of functional group analysis of modified and raw CFA. To facilitate comparison, the results of the IR spectra analysis of the two samples are presented in Table 1.

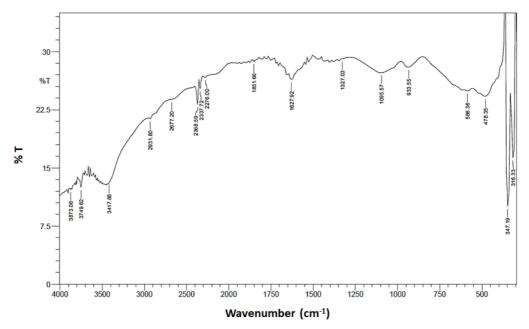


Fig. 4. FT-IR Spectra for Modified Coal Fly Ash (CFA)

Table 1. Comparison of Functional Group Uptake of Raw Ashes and Activated Ashes.

Wavenumber (cm ⁻¹)		Absorbed functional groups	
Raw CFA	Modified CFA	—	
3450 dan 1641	3450 dan 1639	OH stretch from OH	
1047	1059	octahedral and or H2O Internal asymmetrical strain O-T-O,	
795	795	(T = Si and Al) O-T-O external symmetry strain,	
461	463	(T = Si and Al) vibrational buckling of T-O-T	
		(T = Si)	

From the results of the FTIR analysis it appears that there is no significant difference between raw fly ash and fly ash after acid activation indicating no change in functional groups due to acid activation process. In the Al-O and Si-O vibrations there are no significant changes in wave numbers. This indicates that the acid activation process does not damage the Al-O and Si-O bonds.

Specific Surface Area of Solid. The data on the specific surface area of solids, pore volume, average pore network lines are presented in Table 2.

Table 2. Specific Surface Area Analysis Data.

Characteristics	Modified CFA (catalyst)	Raw CFA
Specific surface area (m^2/g)	17.542	28.075
Pore volume (cm^3/g)	0.2005	0.2316
Average pore radius (Å)	32.59	20.31

The decrease in specific surface area occurred after the process of impregnation of Calcium metal in fly ash from 28.08 m²/g to 17.54 m²/g. This decrease in specific surface area is accompanied by a decrease in pore network average from 32.59 Å to 20.31 Å. This shows that the Calcium metal impregnation process causes an increase in the distribution of mineral pore sizes in the mesoporous range as a result of deficiencies in impurities. However, the total volume of pore solids showed an increase. This further supports the assumption of new mesopores formed by the activation process.


Conclusion

The modified coal fly ash (CFA)-based catalyst has been successfully synthesized for the triglyceride transesterification reaction (i.e. biodiesel production) of coconut oil. Modification of the CFA was carried out using sulfuric acid treatment and calcium metal (Ca) treatment. This treatment/modification has improved the physicochemical character of fly ash, which was indicated by the formation of mesopores on the catalyst and the presence of Calcium metal content on the surface of the catalyst which is an active group for the benefit of biodiesel synthesis. The prepared catalyst has the following characteristics. The specific surface area of the catalyst (modified CFA) decreased from 28.08 m²/g to 17.54 m²/g after impregnation process of Calcium metal in the raw coal fly ash. This decrease was also accompanied by a decrease in the average pore network from 32.59 Å to 20.31 Å. Additionally, based on the XRD pattern shown, the raw CFA is composed of mostly quartz (SiO₂) and mullite (3Al₂O₃.2SiO₂) minerals, and a small portion of hematite.

References

- [1] Singh SP, Singh D. Biodiesel production through the use of different sources and characterization of oils and their esters as the substitute of diesel: A review. Renewable and Sustainable Energy Reviews 2010;14:200.
- [2] Pradana YS, Hidayat A, Prasetya A, Budiman A. Application of coconut-shell activated carbon as heterogeneous solid catalyst for biodiesel synthesis. Defect and Diffusion Forum 2018;382 DDF:280.
- [3] Karmakar A, Karmakar S, Mukherjee S. Properties of various plants and animals feedstocks for biodiesel production. Bioresource Technology 2010;101:7201.
- [4] Manuale DL, Torres GC, Vera CR, Yori JC. Study of an energy-integrated biodiesel production process using supercritical methanol and a low-cost feedstock. Fuel Processing Technology 2015;140:252.
- [5] Aransiola EF, Ojumu TV, Oyekola OO, Madzimbamuto TF, Ikhu-Omoregbe DIO. A review of current technology for biodiesel production: State of the art. Biomass and Bioenergy 2014;61:276.
- [6] Kaur M, Malhotra R, Ali A. Tungsten supported Ti/SiO2 nanoflowers as reusable heterogeneous catalyst for biodiesel production. Renewable Energy 2018;116:109.
- [7] Tang, Z.-E., Lim, S., Pang, Y.-L., Ong, H.-C., Lee, K.-T. 2018. Synthesis of biomass as heterogeneous catalyst for application in biodiesel production: State of the art and fundamental review. Renewable and Sustainable Energy Reviews, 92, 235-253.
- [8] Astuti, W.; Chafidz, A.; Wahyuni, E. T.; Prasetya, A.; Bendiyasa, I. M.; Abasaeed, A. E., Methyl violet dye removal using coal fly ash (CFA) as a dual sites adsorbent. Journal of Environmental Chemical Engineering 2019, 7 (5), 103262.
- [9] Taufiq A, Hidayat P, Hidayat A. Modified coal fly ash as low cost adsorbent for removal reactive dyes from batik industry. MATEC Web of Conferences; 2018.

- [10] Bhandari R, Volli V, Purkait MK. Preparation and characterization of fly ash based mesoporous catalyst for transesterification of soybean oil. Journal of Environmental Chemical Engineering 2015;3:906.
- [11] Manique MC, Lacerda LV, Alves AK, Bergmann CP. Biodiesel production using coal fly ashderived sodalite as a heterogeneous catalyst. Fuel 2017;190:268.
- [12] Xiang, Y.; Xiang, Y.; Wang, L., Microwave radiation improves biodiesel yields from waste cooking oil in the presence of modified coal fly ash. Journal of Taibah University for Science 2017, 11 (6), 1019-1029

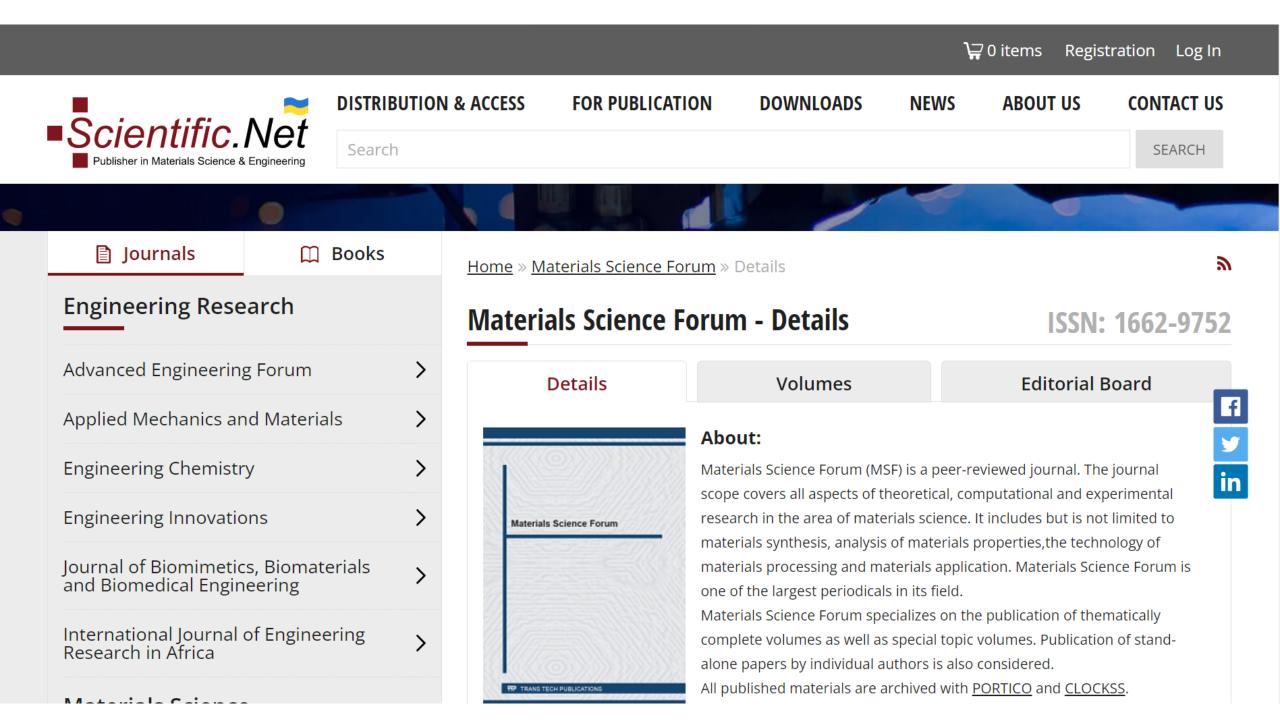

0 items

Search
Journals
Engineering Research
Advanced Engineering Forum
Applied Mechanics and Materials
Engineering Chemistry
Engineering Innovations
Journal of Biomimetics, Biomaterials and Biomedical Engineering
International Journal of Engineering Research in Africa
Materials Science
Advanced Materials Research
Defect and Diffusion Forum
Diffusion Foundations and Materials Applications
Journal of Metastable and Nanocrystalline Materials
Journal of Nano Research
Key Engineering Materials
Materials Science Forum

Nano Hybrids and Composites				
Solid State Phenomena				
Engineering Series				
Advances in Science and Technology				
Construction Technologies and Architecture				
Books				
Special Book Collections				
Foundations of Materials Science and Engineering				
Scientific Books Collection				
Specialized Collections				
Retrospective Collection				

Materials Science Forum

ISSN: 1662-9752

Details

Volumes

Editorial Board

Enter Number of Volume

Year

|--|

Volumes

Materials Science Forum Vol. 1081

Edited by: Dr. Thangaprakash Sengodan, Dr. Peter Horňak, Dr. Miloš Matvija, Dr. Denis B. Solovev and Ramadhansyah Putra Jaya

Online since: March 2023

Description: This special topic edition is devoted to current issues in materials science and materials synthesis and processing technologies. The publication will be useful to materials <u>...more</u>

Materials Science Forum Vol. 1080

Edited by: Dr. Juniastel Rajagukguk, Prof. Agustinus Agung Nugroho, Prof. Shixuan Xin, Prof. Iulian Antoniac and Prof. Guillermo Requena

Online since: January 2023

Description: This special edition is dedicated to analysing properties and possible methods of treatment and applications of the comprehensive nomenclature of modern special and <u>...more</u>

Materials Science Forum Vol. 1079

Edited by: Prof. Iulian Antoniac, Prof. Guillermo Requena, Dr. Xinyu Hu, Dr. Omar S. Dahham and Dr. Nur Hidayati Othman

Online since: December 2022

Description: This edition presents a series of research results in materials science and technologies of materials synthesis and processing used in many branches of modern

<u>...more</u>

Materials Science Forum Vol. 1078

Edited by: Prof. Iulian Antoniac, Prof. Guillermo Requena, Dr. Omar S. Dahham and Dr. Xinyu Hu

Online since: December 2022

Description: This special topic edition presents the latest research results in materials science and materials synthesis and processing technologies for various branches of modern ...more

.

Materials Science Forum Vol. 1077

Edited by: Dr. Omar S. Dahham, Assoc. Prof. Dr. Norzahir Sapawe, Dr. Noor Faizah Che Harun and Prof. Mosbeh Kaloop

Online since: December 2022

Description:

This edition presents the latest research results in materials science and technologies for <u>...more</u>

https://www.scientific.net/MSF

Materials Science Forum Vol. 1076

Edited by: Assoc. Prof. Dr. Norzahir Sapawe, Dr. Noor Faizah Che Harun, Prof. Takahiro Ohashi, Prof. Chafic-Touma Salame and Prof. Yuyuan Zhao

Online since: December 2022

Description: This edition acquaints readers with the latest scientific and engineering research in materials properties and methods of their applications, as well as the results of developing ...more

Materials Science Forum Vol. 1075

Edited by: Prof. Yuyuan Zhao, Prof. Omar S. Es-Said, Dr. G. Kumaresan, Dr. N. Siva Shanmugam and Dr. V. Dhinakaran

Online since: November 2022

Description: The latest research results in the area of materials science and applied technologies and methods of materials synthesis and processing are described in this ...more

Materials Science Forum Vol. 1074

Edited by: Dr. Ramya Muthusamy, Dr. Thangaprakash Sengodan and Prof. long Wan Hu

Online since: November 2022

Description: In this edition, the reader can get acquainted with the research results of properties for structural and functional materials, and materials and technologies in

...more

Materials Science Forum Vol. 1073

Edited by: Prof. Jong Wan Hu, Dr. Ramya Muthusamy and Dr. Thangaprakash Sengodan Online since: October 2022 **Description:**

In this edition, the research results of properties for structural and functional materials, ...more

Materials Science Forum Vol. 1072

Edited by: Prof. Yafang Han, Dr. Fenfen Liang, Prof. Ke Yong Shao, Dr. Ramya Muthusamy and Dr. Thangaprakash Sengodan Online since: October 2022

Description:

This issue presents to the reader's attention the research results in the sphere of structural ...more

1	2	3	4	5	•••	>	>>
---	---	---	---	---	-----	---	----

DISTRIBUTION & ACCESS

FOR PUBLICATION

INSIGHTS

DOWNLOADS

ABOUT US

POLICY & ETHICS

CONTACT US

IMPRINT

PRIVACY POLICY

SITEMAP

ALL CONFERENCES

ALL SPECIAL ISSUES

ALL NEWS

Scientific.Net is a registered brand of Trans Tech Publications Ltd \odot 2023 by Trans Tech Publications Ltd. All Rights Reserved

Table of Contents

Preface

Chapter 1: Metallurgical Technologies, Properties of Steels and Alloys

Microstructure and Impact Toughness of Flux-Cored Arc Welded SM570-TMC Steel at Low and High Heat Input	
H. Oktadinata, W. Winarto and E.S. Siradj	3
Investigation of the Intermetallic Formation on Wet Underwater Welding of AISI 4012 Steel	
A.D. Anggono, Suwantri, W.A. Siswanto and J. Sedyono	10
Effect of Magnesium on the Strength, Stiffness and Toughness of Nodular Cast Iron A.S. Darmawan, P.I. Purboputro, A. Yulianto, A.D. Anggono, Wijianto, Masyrukan, R.D. Setiawan and N.D. Kartika	17
Effect of Ti Contents on the Microstructure and Mechanical Properties of NiAlTi System D. Wicaksono, X.M. Zhu, M.S. Mustapa, S. Yulianto, A.Y. Nasution and T.W.B. Riyadi	24
Defect Investigation of Sand Casted Aluminum Cooling Fan D. Prihtiantoro, A.D. Anggono and W.A. Siswanto	30
Microstructure and Hardness of Gray Cast Iron as a Product of Solidification in Permanent Mold	
A. Yulianto, R. Soenoko, W. Suprapto, A. Sonief, A.S. Darmawan and M.D. Setiawan	37
Structure and Properties of NiAlTi Systems Formed by Combustion Synthesis T.W.B. Riyadi	44
Chapter 2: Characterization and Testing of Materials	
HAp Coated Hip Prosthesis Contact Pressure Prediction Using FEM Analysis M. Nagentrau, A.L. Mohd Tobi, S. Jamian and Y. Otsuka	53
Effect of the Fine Recycled Aggregates on the Dynamic Compressive Behavior of Recycled Mortar	
S. Ismail, M.A. Abd Hamid and Z. Yaacob	62
Assessment of the Stress-Strain State of a Tube Sheet of the Heat Exchanger at Rotary Friction Welding Application	
A.S. Tokarev, D. Karetnikov, R.G. Rizvanov, A.M. Fahrushin and M.Z. Zaripov	70
Characterisation of Electrode Drying Effect on the Tungsten Carbide Hardfacing Microstructure	
Microstructure M. Nagentrau, A.L. Mohd Tobi, S. Jamian and M. Sambu	77
Fatigue Behavior Improvement of A356 Aluminum Alloy of Motorcycle Cast Wheel Produced by High Speed Centrifugal Casting Based on T6 Heat Treatment and Artificial Aging	
P.T. Iswanto, Akhyar, A. Janata, L.M. Mauludin and H.M. Sadida	86
Electrochemical Performance of Barium Strontium Cobalt Ferrite -Samarium Doped Ceria- Argentum for Low Temperature Solid Oxide Fuel Cell	<u>.</u>
U.A. Yusop, T.K. Huai, H.A. Rahman, N.A. Baharuddin and J. Rahario	94

Resistance to Chloride Penetration of Recycled Aggregate Concrete Modified Using Treated Coarse Recycled Concrete Aggregate and Fibres S. Ismail and M. Ramli 101

Chapter 3: Technologies of Biomass Processing

Catalytic Pyrolysis of Palm Empty Fruit Bunch over Activated Natural Dolomite Catalyst: Product Distribution and Product Analysis A. Hidayat, M.A. Adnan and A. Chafidz

CaO/Natural Dolomite as a Heterogeneous Catalyst for Biodiesel Production B. Sutrisno, A.D. Nafiah, I.S. Fauziah, W. Kurniawan, H. Hinode and A. Hidayat	117
Investigating the Potential Use of Cassava Leaf Extract as a Natural Coloring Substance for Fabrics	
S. Rusdi, M.Y. Zakaria, R.N.F. Aditya and A. Chafidz	123
Investigating the Potential Use of Papaya Leaf Extract as Natural Dyes in the Textile Industry S. Rusdi, H.F. Maulana, N.L. Samudro and A. Chafidz	129
Synthesis of Grafted Cationic Starch with DMDAAC Using Ammonium Persulfate/Carbamide Initiation System	-
H. Tang, P.Y. Zhang, T.X. Li and Y. Ma	135
Biodiesel Synthesis from Used Cooking Oil Using Red Mud as Heterogeneous Catalyst A. Hidayat, G.K. Roziq, F. Muhammad, W. Kurniawan and H. Hinode	144
Effect of HCl-Alcoholic Treatment on the Modification of Jackfruit (<i>Artocarpus heterophyllus</i> Lam) Seed Starch	
T.H.T. Le, H.T. Nguyen, V.K. Nguyen, T.L. Nguyen and T.T. Nguyen	150
Chapter 4: Technologies of Chemical Production and Wastewater Treatment	
Characterization of Hydroxyapatite Synthesized from Calcium Hydroxide and Phosphoric	
	159
Characterization of Hydroxyapatite Synthesized from Calcium Hydroxide and Phosphoric Acid as Adsorbents of Lead in Wastewater H.T. Nguyen and P.T. Dang Research and Application of a New Demulsifier for the Processing of Produced Liquid in Chanqing Gasfield	
Characterization of Hydroxyapatite Synthesized from Calcium Hydroxide and Phosphoric Acid as Adsorbents of Lead in Wastewater H.T. Nguyen and P.T. Dang Research and Application of a New Demulsifier for the Processing of Produced Liquid in Chanqing Gasfield S.J. Chen, F. Tang, W. Tian, Q.n. LIU and G. Chen Utilization of Modified Zeolite Materials as Chromium Cation Exchanger for Treatment of	159 166
Characterization of Hydroxyapatite Synthesized from Calcium Hydroxide and Phosphoric Acid as Adsorbents of Lead in Wastewater H.T. Nguyen and P.T. Dang Research and Application of a New Demulsifier for the Processing of Produced Liquid in Chanqing Gasfield S.J. Chen, F. Tang, W. Tian, Q.n. LIU and G. Chen	
 Characterization of Hydroxyapatite Synthesized from Calcium Hydroxide and Phosphoric Acid as Adsorbents of Lead in Wastewater H.T. Nguyen and P.T. Dang Research and Application of a New Demulsifier for the Processing of Produced Liquid in Chanqing Gasfield S.J. Chen, F. Tang, W. Tian, Q.n. LIU and G. Chen Utilization of Modified Zeolite Materials as Chromium Cation Exchanger for Treatment of Liquid Waste from Electroplating Industries Z. Salimin, M. Susianto, B. Batara and A. Chafidz Chemical Treatment of Liquid Waste Generated from Leather Tannery Industry by Using Alum as Coagulant Material 	166 172
 Characterization of Hydroxyapatite Synthesized from Calcium Hydroxide and Phosphoric Acid as Adsorbents of Lead in Wastewater H.T. Nguyen and P.T. Dang Research and Application of a New Demulsifier for the Processing of Produced Liquid in Chanqing Gasfield S.J. Chen, F. Tang, W. Tian, Q.n. LIU and G. Chen Utilization of Modified Zeolite Materials as Chromium Cation Exchanger for Treatment of Liquid Waste from Electroplating Industries Z. Salimin, M. Susianto, B. Batara and A. Chafidz Chemical Treatment of Liquid Waste Generated from Leather Tannery Industry by Using Alum as Coagulant Material Z. Salimin, F.W. Satiyoaji, D.A. Prasetya and A. Chafidz 	166
 Characterization of Hydroxyapatite Synthesized from Calcium Hydroxide and Phosphoric Acid as Adsorbents of Lead in Wastewater H.T. Nguyen and P.T. Dang Research and Application of a New Demulsifier for the Processing of Produced Liquid in Chanqing Gasfield S.J. Chen, F. Tang, W. Tian, Q.n. LIU and G. Chen Utilization of Modified Zeolite Materials as Chromium Cation Exchanger for Treatment of Liquid Waste from Electroplating Industries Z. Salimin, M. Susianto, B. Batara and A. Chafidz Chemical Treatment of Liquid Waste Generated from Leather Tannery Industry by Using Alum as Coagulant Material 	166 172
 Characterization of Hydroxyapatite Synthesized from Calcium Hydroxide and Phosphoric Acid as Adsorbents of Lead in Wastewater H.T. Nguyen and P.T. Dang Research and Application of a New Demulsifier for the Processing of Produced Liquid in Chanqing Gasfield S.J. Chen, F. Tang, W. Tian, Q.n. LIU and G. Chen Utilization of Modified Zeolite Materials as Chromium Cation Exchanger for Treatment of Liquid Waste from Electroplating Industries Z. Salimin, M. Susianto, B. Batara and A. Chafidz Chemical Treatment of Liquid Waste Generated from Leather Tannery Industry by Using Alum as Coagulant Material Z. Salimin, F.W. Satiyoaji, D.A. Prasetya and A. Chafidz Synthesis of Hydrophobically Associating Polymers and the Application as Oil-Displacing Agent R.J. Zhang, J.L. Zhao, X.K. Wang, Z.P. Zhou and G. Chen 	166 172
 Characterization of Hydroxyapatite Synthesized from Calcium Hydroxide and Phosphoric Acid as Adsorbents of Lead in Wastewater H.T. Nguyen and P.T. Dang Research and Application of a New Demulsifier for the Processing of Produced Liquid in Chanqing Gasfield S.J. Chen, F. Tang, W. Tian, Q.n. LIU and G. Chen Utilization of Modified Zeolite Materials as Chromium Cation Exchanger for Treatment of Liquid Waste from Electroplating Industries Z. Salimin, M. Susianto, B. Batara and A. Chafidz Chemical Treatment of Liquid Waste Generated from Leather Tannery Industry by Using Alum as Coagulant Material Z. Salimin, F.W. Satiyoaji, D.A. Prasetya and A. Chafidz Synthesis of Hydrophobically Associating Polymers and the Application as Oil-Displacing Agent 	166 172 178

0 items

Search
Journals
Engineering Research
Advanced Engineering Forum
Applied Mechanics and Materials
Engineering Chemistry
Engineering Innovations
Journal of Biomimetics, Biomaterials and Biomedical Engineering
International Journal of Engineering Research in Africa
Materials Science
Advanced Materials Research
Defect and Diffusion Forum
Diffusion Foundations and Materials Applications
Journal of Metastable and Nanocrystalline Materials
Journal of Nano Research
Key Engineering Materials
Materials Science Forum

Nano Hybrids and Composites				
Solid State Phenomena				
Engineering Series				
Advances in Science and Technology				
Construction Technologies and Architecture				
Books				
Special Book Collections				
Foundations of Materials Science and Engineering				
Scientific Books Collection				
Specialized Collections				
Retrospective Collection				

Materials Science Forum - Editorial Board

ISSN: 1662-9752

Volumes	
Editorial Board	

Founding Editor

Fred H. Wohlbier

Honorary Editor

Prof. Graeme E. Murch

University of Newcastle, Centre for Mass and Thermal Transport in Engineering Materials, School of Engineering; Callaghan, Australia, NSW 2308;

Editor(s) in Chief

Prof. Iulian Antoniac

University Politehnica of Bucharest, Faculty of Materials Science and Engineering; 313 Splaiul Independentei, Bucharest, 060042, Romania;

Prof. Guillermo Requena

ORCID

German Aerospace Center (DLR), Institute of Materials Research ; Köln, DE-51170, Germany;

Editorial Board

Prof. Dezső L. Beke

University of Debrecen, Department for Solid State Physics; Bem tér 18/b, Debrecen, 4026, Hungary;

Prof. Giorgio Benedek

University of Milano Bicocca, Department of Materials Science; U5, Universitá di Milano-Bicocca, Via R. Cozzi 55, Milano, 20125, Italy;

Dr. Giacomo Benvenuti

<u>ORCID</u>

ABCD Technology; Switzerland;

Prof. Anil K. Bhatnagar

University of Hyderabad, School of Physics and School of Engineering; Hyderabad, India, 500046;

Prof. Chi Ming Chan

Hong Kong University of Science and Technology, Department of Chemical and Biomolecular Engineering, Clear Water Bay; Kowloon, China;

Dr. Abel S. Fenta

<u>ORCID</u>

CERN; Genève, CH-1211, Switzerland;

Roberto B. Figueiredo

Federal University of Minas Gerais, Department of Metallurgical and Materials Engineering; Belo Horizonte, MG, 30, Brazil, 31270-901;

Prof. Hermann G. Grimmeiss

Lund University, Department of Solid State Physics; Box 118, Lund, 221 00, Sweden;

Prof. Jerzy Jedlinski

AGH University of Science and Technology, Faculty of Materials Science and Ceramics, Department of Physical Chemistry and Modeling of Processes and Surface Engineering; al. Mickiewicza 30, Kraków, 30-059, Poland;

Prof. Megumi Kawasaki

ORCID

Oregon State University, School of Mechanical, Industrial and Manufacturing Engineering; 204 Rogers Hall, Corvallis, USA, 97331;

Prof. Terence G. Langdon

University of Southampton, Faculty of Engineering and the Environment; Lanchester Building (Bldg. 7), Highfield Campus, Southampton, United Kingdom, SO17 1BJ;

Prof. Jai Sung Lee

Hanyang University, Department of Metallurgy and Materials Science; 55 Daehak-no, Sangnok-gu, Ansan, Korea, South, 426-791;

Prof. Eric J. Mittemeijer

Max Planck Institute for Intelligent Systems; Heisenbergstrasse 3, Stuttgart, 70569, Germany;

Prof. Stephen J. Pearton

University of Florida, Department of Materials Science and Engineering; Gainesville, USA, 32611-6400;

Prof. Vassilis Pontikis

Commissariat à l'Energie Atomique et les Energies Alternatives (CEA), CEA-Saclay; Bdg. 524, Gif-sur-Yvette, 91191, France;

Prof. András Roósz

Hungarian Academy of Sciences, Miskolc University (HAS-MU); Miskolc-Egyetemváros, 3515, Hungary;

Prof. David N. Seidman

Northwestern University, Department Materials Science and Engineering; Cook Hall, 2220 Campus Drive, Evanston, USA, 60208;

Dr. Ching Hua Su

NASA/Marshall Space Flight Center, EM31 NASA/Marshall Space Flight Center; Huntsville, USA, 35812;

Prof. David Tomanek

Michigan State University, Physics and Astronomy Department; 567 Wilson Road, East Lansing, USA, MI 48824-6455;

Prof. A.S. Wronski

University of Bradford, School of Engineering, Design and Technology; West Yorkshire, Bradford, United Kingdom, BD7 1DP;

Emeritus Prof. David J. Young

University of New South Wales, School of Materials Science and Engineering; Sydney, Australia, NSW 2052;

DISTRIBUTION & ACCESS FOR PUBLICATION INSIGHTS DOWNLOADS ABOUT US POLICY & ETHICS CONTACT US IMPRINT PRIVACY POLICY SITEMAP ALL CONFERENCES ALL SPECIAL ISSUES

Scientific.Net is a registered brand of Trans Tech Publications Ltd © 2023 by Trans Tech Publications Ltd. All Rights Reserved