



## Hydrolysis of Microalgae *Spirulina platensis*, *Chlorella* sp., and Macroalgae *Ulva lactuca* for Bioethanol Production

[www.ericjournal.ait.ac.th](http://www.ericjournal.ait.ac.th)

Kusmiyati Kusmiyati<sup>\*</sup>, Agnes Heratri<sup>+</sup>, Sinju Kubikazari<sup>+</sup>,  
Arif Hidayat<sup>#</sup>, and H. Hadiyanto<sup>^,1</sup>

**Abstract** – Algal bioethanol is a renewable alternative fuel for gasoline that resulted in no disruption in food sources. This study investigated the effect of acid hydrolysis using  $H_2SO_4$  on microalgae (*Chlorella* sp. and *Spirulina platensis*) and a macroalga (*Ulva lactuca*) with varying acid concentrations, temperatures, and hydrolysis time. The acid hydrolysis was carried out followed by separated hydrolysis and fermentation method (SHF). The hydrolysis process was used to break down the cell walls of algae and to convert complex carbohydrates from the cell wall into simple sugars. The *Chlorella* sp., *Spirulina platensis*, and *Ulva lactuca* were hydrolyzed with  $H_2SO_4$  concentration of 0.5–2 N. The results showed that the highest total sugar concentration of *Ulva lactuca* biomass was 12.85% (v/v) when using hydrolysis of 2 N  $H_2SO_4$ . However, for *Spirulina platensis* and *Chlorella* sp. resulted only 4% (v/v) and 10% (v/v), respectively. The results are in agreement with proximate carbohydrate analysis that showed the highest carbohydrate of 74.82% on *Ulva lactuca* was obtained as compare to that on *Spirulina platensis* and *Chlorella* sp. of 53.85% and 55.39%, respectively. Thus, *Ulva lactuca* was further investigated to determine the effects of hydrolysis time from 60 to 120 min at different temperatures of 40–100°C. The maximum total sugar concentration (23.04%; v/v) was obtained using 2 N  $H_2SO_4$  at 100°C for 60 min. The fermentation time on bioethanol production was also investigated for *Ulva lactuca* hydrolysate (2 N  $H_2SO_4$  at 80°C for 60 min) at a different time of 24–72 h. The highest bioethanol concentration (1.45%; v/v) was obtained at a fermentation time of 72 h. This study indicated that acid hydrolysis is useful for rupturing the cell walls of *Chlorella* sp., *Spirulina platensis*, and *Ulva lactuca* for fermentative bioethanol production.

**Keywords** – acid hydrolysis, bioethanol, *Chlorella* sp., *Spirulina platensis*, *Ulva lactuca*.

### 1. INTRODUCTION

In the industrial era, energy sources, such as coal, natural gas, and petroleum oil, have become vital components [1]. In 2018, primary energy consumption in the world rapidly grew by 2.9%, which was almost doubled that obtained in the previous 10 years, with an average of 1.5%. A significant increase in energy consumption is driven by an increase in a population dominated by average fossil fuel demand above 1.4 million (b/d) [2]. Increased energy demand must be balanced by availability. However, the availability of energy sources especially those from fossils has been estimated to decrease every year and will be exhausted within the next 70–150 years [3]. Researchers continually offer solutions to overcome the problem of energy scarcity. One of these solutions is the use of renewable fuels commonly called biofuels [4]. Several

types of biofuels, such as biodiesel and bioethanol, are potential materials to replace fossil fuels. Bioethanol is an additive or gasoline substitute derived from vegetable materials [5]. The advantages of bioethanol include raw materials that originate from renewable biomass. Although bioethanol features a high excess octane value of 108, its initial ignition antiknock prohibits the knock-on engines [6].

Based on the raw materials used, bioethanols are grouped into several generations. The first generation of bioethanol comes from cereal grains, such as corns, canes, or soybeans, whereas the second generation includes lignocelluloses, such as bagasse or potato peel [7]–[9]. The first-generation raw materials are considered less effective because they will conflict with food sources; the second-generation bioethanol is developed from non-food raw materials, such as forestry or agricultural waste [10]. Biofuel based on the first and second generation is unsustainable due to the competition in agricultural land used for food crops [11]. The third-generation bioethanol is developed and derived from algae, which are interesting raw materials. The advantages of third-generation bioethanol include a rapid growth rate, the capability to fix  $CO_2$ , growth on unproductive land, and non-competition with food crops [12].

Based on morphology and size, algae are grouped into microalgae and macroalgae. Microalgae are single-celled, whereas macroalgae are multicellular [13]. In general, microalgae called phytoplankton float above the water surface. Several types of microalgae can be used as raw materials for bioethanol production because of their high carbohydrate content (20–40%) [14]. Algal

<sup>\*</sup>Department of Industrial Engineering, Faculty of Engineering, Universitas Dian Nuswantoro, Semarang, Indonesia.

<sup>+</sup>CV Pradipta Paramita, Pulosari RT 03 RW 04 Kebakkramat, Karanganyar, Jawa Tengah 57762, Indonesia.

<sup>#</sup>Chemical Engineering Department, Faculty of Industrial Technology, Universitas Islam Indonesia, Jl. Kaliurang km 14.5, Sleman, D.I. Yogyakarta, 55584 Indonesia.

<sup>^</sup>Chemical Engineering Department, Faculty of Engineering, Diponegoro University Semarang, Indonesia.

<sup>1</sup> Corresponding author;  
Tel: +62-81329057489, Fax: +62-247460058.  
E-mail: [kusmiyati@dsn.dinus.ac.id](mailto:kusmiyati@dsn.dinus.ac.id)

species, such as *Chlorella vulgaris* [15], *Scenedesmus dimorphus* [16], and *Chlorococcum sp.* [17] have been used for bioethanol production. In addition, the other microalgal types, including *Chlorella* [18] and *Arthrospira (Spirulina) platensis* [19] possess a carbohydrate content of more than 40% of their dry weight (DW). Carbohydrates in microalgae occur mostly in the form of cellulose and starch, where starches are bound in rigid cell walls composed of cellulose, xylan, mannan, and glycosylated sulfate [20]. The cell wall in microalgae comprises an outer layer and an inner layer. The outer layer is composed of pectin, agar, or alginate. The inner layer consists of hemicellulose, cellulose, and glycoprotein [13].

Macroalgae also grow at a fast rate and produce huge biomass [21]. Macroalgae contain several types of carbohydrates, such as, cellulose, laminar, carrageenan, mannan, mannitol, alginate, and ulvan, which are absent in lignocellulosic biomass. Macroalgae are classified into three groups based on pigments: *Rhodophyta* (red algae), *Phaeophyta* (brown algae), and *Chlorophyta* (green algae) [13]. The common macroalgae are known as seaweeds and are normally seen attached to rocks. Besides, several species of macroalgae, such as *Ulva lactuca*, *Undaria pinnatifida*, *Sargassum ilicifolium*, *Eucheuma cottonii*, or *Gelidium amansii*, feature potential as bioethanol raw material given their dry-matter carbohydrate content (26–66%) [22].

Carbohydrates consist of 70% (dry weight) part of the *Chlorococcum* species distorted in the chloroplast. Therefore, it requires an excessive temperature and pressure to help the microalgae cells break during the supercritical fluid extraction from fat. This process results in the release of polysaccharides beginning from cell walls [16]. Rabelo *et al.* [23] reported that hydrolysis is commonly used because it can release carbohydrates from the cell wall and convert them into fermentable sugars for bioethanol production. Hydrolysis includes several kinds, such as acid hydrolysis, alkaline hydrolysis, or enzymatic hydrolysis. The enzymatic hydrolysis is commonly used for bioethanol production from algae [24]. A previous study reported that maximum glucose release reached 68.2% (w/w) after hydrolysis of *Chlorococcum humicola* with 20 mg cellulase at 40°C for 72 h. Enzymatic hydrolysis shows the potential for applications in microalgal biomass. However, the enzymatic hydrolysis presents several disadvantages, such as long processing time and high cost, indicating the need for more treatments for the production of an optimal product [25].

For these reasons, this study performed acid hydrolysis with H<sub>2</sub>SO<sub>4</sub>. The advantages of this method include low cost, non-requirement of the acid recovery process, and zero acid loss during the hydrolysis process [26]. This work investigated the effect of acid concentration on hydrolysis acid using raw materials, such as *Spirulina platensis*, *Chlorella sp.*, and *Ulva lactuca*. Then, *Ulva lactuca* was used to investigate the effect of hydrolysis time and temperature on the bioalgal content. The highest total sugar concentration under the hydrolysis temperature and time of *Ulva lactuca* was used for bioethanol production using fermentation

followed by separate hydrolysis and fermentation (SHF) method.

## 2. METHODOLOGY

### 2.1 Raw Materials

The algal raw materials used for this study included *Chlorella sp.*, *Spirulina platensis*, and *Ulva lactuca*. The dry-powder of algal biomass was obtained from Semarang and Jogjakarta, Indonesia. Pure commercial H<sub>2</sub>SO<sub>4</sub> (p.a) (Merck 98 wt %) was used for the hydrolysis process. The other materials used in this research included yeast extract (Merck), maltose (Merck), peptone (Merck), and glucose (Merck). Bacteriological agar (Oxoid) was used to cultivate the yeast *Saccharomyces cerevisiae*.

### 2.2 Experimental Methods

#### 2.2.1 Acid hydrolysis

Each alga (*Spirulina platensis*, *Chlorella sp.*, and *Ulva lactuca*) at 10% (w/v) was mixed with different concentrations of H<sub>2</sub>SO<sub>4</sub> (0.5; 1; 1.5; and 2 N) to reach a 100 ml solution. The suspension was hydrolyzed in a water bath at 80°C for 60 min with an agitation rate of 200 rpm. The highest total sugar content of the three types of microalgae and macroalgae with variations in H<sub>2</sub>SO<sub>4</sub> concentration was chosen for further study on the effect of temperature and hydrolysis time. The algae with maximum total sugar were hydrolyzed at varying temperatures (40, 60, 80, and 100°C) and times (60, 80, 100, and 120 min). The hydrolysate was cooled to room temperature and was adjusted to pH 6.5–7 using CaCO<sub>3</sub> solution. Then, the hydrolysate was used for the fermentation process.

#### 2.2.2 Fermentation

The pure culture of *Saccharomyces cerevisiae* was incubated on an agar solid medium containing: 3 g/L yeast extract, 3 g/L maltose, 5 g/L peptone, 15 g/L agar, and 10 g/L glucose. The medium was autoclaved at 121°C and 1 atm. Then, the yeast was incubated at 30°C for 24 h. The solid phase was used for preculture.

The preculture medium for *Saccharomyces cerevisiae* (100 ml) contained 10 g/L yeast, 26 g/L peptone, 20 g/L glucose, and distilled water and was sterilized in an autoclave at 121°C and 1 atm. The yeast was incubated at 200 rpm at 30°C for 24 h. The preculture was centrifuged for 2 min at 600 x g. The solid phase was used for the main culture.

The main culture of 10 g/L yeast was cultivated from preculture. A 500 ml medium consisted of 26 g/L peptone, 20 g/L glucose, and distilled water and autoclaved at 121°C and 1 atm. The medium was incubated at 200 rpm for 24 h at 30°C. The main culture was centrifuged for 2 min at 600 x g. The liquid phase was discarded, and the solid phase was repeatedly neutralized with 1% H<sub>3</sub>PO<sub>4</sub> (v/v) until the residual sugars were removed.

The hydrolysate obtained using 2 N H<sub>2</sub>SO<sub>4</sub> at 80°C for 60 min hydrolysis of *Ulva lactuca* 10% (w/v) was used for fermentation. The hydrolysate was added with 1

M citrate solution until pH 4.5. Then, the mixture was sterilized with autoclave at 121°C for 15 min at 1 atm.

For fermentation of *Ulva lactuca* hydrolysates, the main culture of *Saccharomyces cerevisiae* was added to 100 ml hydrolysate containing peptone (5 g/L) and yeast extract (3 g/L) to obtain a 10% concentration (w/v). The incubation process was conducted at 24, 48, and 72 h. Then, the bioethanol content was separated using distillation at 79°C. The distillate was used for the analysis of bioethanol content by Gas Chromatography (GC). The slurry from fermentation was used for the analysis of total sugar content and glucose concentration by High-Performance Liquid Chromatography (HPLC).

## 2.2.3 Analytical procedures

### 2.2.3.1 Microalgae composition

Proximate analysis was used to determine the water, ash, and carbohydrate contents following the method from the work of Lynch *et al.* [27]. Water content was measured by drying at 105°C until constant weight. The protein content was calculated using the Kjeldahl method with a factor of N = 6.25 [28]. Furthermore, the lipid content was deduced using the soxhlet method [27].

The lignin, cellulose, and hemicellulose contents were measured with the method of Chesson-Datta [29]. A mixture containing 1 g dried algal (*Spirulina platensis* or *Chlorella* sp. or *Ulva lactuca*) and 150 ml distilled water was heated at 100°C for 1 h. 1 g dried sample is written as the symbol (a). The residues were filtered and washed by hot water (300 ml). The residues were oven-dried until constant weight that a value of (b) was obtained. 150 ml H<sub>2</sub>SO<sub>4</sub> (1 N) was mixed with dried residues and heated at 100°C for 1 h. Then, the mixture was filtered and washed by distilled water (300 ml), and the residues were dried until constant weight that was written as a symbol (c). The dried residues were mixed with 10 ml of 72% H<sub>2</sub>SO<sub>4</sub> at room temperature for 4 h. Then, 150 ml H<sub>2</sub>SO<sub>4</sub> (1 N) was added and refluxed at 100°C for 1 h. The residues were filtered and washed by distilled water (400 ml) until neutral and dried in an oven until constant weight that written as a symbol (d). The residue was heated until it became ash and weighed. The percentage of hemicellulose, cellulose, and lignin was calculated as follows:

$$\% \text{ hemicellulose} = (c-b)/a \times 100\% \quad (1)$$

$$\% \text{ cellulose} = (d-c)/a \times 100\% \quad (2)$$

$$\% \text{ lignin} = (e-d)/a \times 100\% \quad (3)$$

Where;

(a) = 1 g dried sample

(b) = The dried residue after reflux with hot water

(c) = The dried residue after reflux with sulfuric acid H<sub>2</sub>SO<sub>4</sub> (1 N)

(d) = The dried residue after reflux with sulfuric acid (72% H<sub>2</sub>SO<sub>4</sub>)

### 2.2.3.2 Scanning Electron Microscopy (SEM)

The surface of the microstructure of *Chlorella* sp., *Spirulina platensis*, and *Ulva lactuca* before H<sub>2</sub>SO<sub>4</sub> hydrolysis was analyzed with a scanning electron microscope (SEM; JEOL type JSM-6510LA, JEOL Ltd., Japan). Firstly, the samples were fractured in liquid nitrogen. Further, the sample was mounted on an aluminum disk with double surface tape, and the sample holder was placed and evacuated in a sputter-coater with gold. The images of sample surface morphology were obtained at a specific magnification at 500x, 1000x, and 5000x.

### 2.2.3.3 Determination of total sugar content

All samples obtained from hydrolysis with varying acid concentrations, temperatures, and the sample from the fermentation process are separated from the slurry to obtain a supernatant. The supernatant was centrifuged for 3 min at 5000 x g. Then, the liquid phase was neutralized with CaCO<sub>3</sub> solution until pH 6.5–7, after that. The solid phase was removed by centrifugation at 4000 x g for 15 min. The liquid phase was used to determine the total sugar content. Total sugar content was analyzed using the Somogyi modification method. Total sugar was measured by diluting 25 mL sample with distilled water until 100 ml volume. A total of 20 ml sample solution added 4 ml HCl was then heated to boil and neutralized with 4 N NaOH. The solution was neutralized with 45% NaOH and diluted to a volume of 100 mL. Testing was performed by taking a 1 ml sample by adding 10 ml Somogyi-Nelson reagents [30] and hydrolyzation for 30 min at a temperature of 95°C. Then, the sample was cooled to room temperature and titrated.

### 2.2.3.4 Determination of glucose content

The slurry from the fermentation process was centrifuged for 3 min at 5000 x g. Then, the liquid phase was neutralized with CaCO<sub>3</sub> solution until pH 6.5–7. The solid phase was removed by centrifugation at 4000 x g for 15 min. The liquid phase was filtered using a 0.2 µm membrane filter for analysis. The identification and quantification of glucose during the fermentation process were carried out by HPLC (Shimadzu Corporation, Japan) supplemented with Shimadzu LC (LC-20AD) and Shimadzu refractive index detector. The column used WAS RP-18 C18 Hibar (250 mm x 4.6 mm, 5 µm). The sample was filtered through a syringe filter and injected into HPLC at the column temperature of 50°C. A mixture of acetonitrile and water (85:15 v/v) was used as the mobile phase with a flow rate of 1 ml/min. The injection volume was 20 µL. Glucose concentrations were calculated using a calibration curve obtained from the standard solution of this compound.

### 2.2.3.5 Determination of ethanol content

The distillate was used to determine the bioethanol concentration by GC (model Agilent 6820, Agilent Technologies, United States). The flame ion detector and a polar capillary column HP-5 (P/N: 1909 LJ-413; length: 30 m, diameter: 320 µm) were used. The detector



and oven temperatures were maintained at 250°C and 90°C, respectively. Helium gas was used as the carrier gas. A total of 1 µL sample was injected into the GC syringe for the calculation of bioethanol content.

### 3. RESULTS AND DISCUSSION

#### 3.1. Characterization of Algae

##### 3.1.1 Proximate analysis

Table 1 presents the proximate analysis of dried algae types *Spirulina platensis*, *Chlorella sp.*, and *Ulva lactuca*. Proximate analysis can provide information about the percentage of lipids, proteins, carbohydrates and ash and water contents of the algal biomass. Based on Table 1, *Spirulina platensis* contained 53.85%, 32.11%, 1.89% DW carbohydrate, proteins, and lipids, respectively. Previous studies showed that *Spirulina platensis* contained carbohydrates, proteins, and lipids with 8–14%, 46–63%, and 4–9% dry matter content, respectively [30]. These findings indicate that the carbohydrate content of *Spirulina platensis* in this study was higher than that of previous studies. The difference in carbohydrates, proteins, unsaturated fatty acids, and pigments results from the quantity and quality of nutrients and light during cultivation, which affects the formation of *Spirulina platensis* carbohydrates [31].

Table 1 shows the proximate analysis results of *Chlorella*, which contained 55.39% carbohydrates,

14.32% proteins, and 11.37% lipids. A previous study on *Chlorella vulgaris* reported yields of 12–17% carbohydrates, 51–58% proteins, and 14–22% lipids [30]. Thus, the *Chlorella sp.* from this study contained the highest carbohydrate content compared with *Chlorella vulgaris* and *Chlorella pyrenoidosa* from previous studies.

The *Ulva lactuca* from this study consisted of 74.82% carbohydrates, 14.74% proteins, and 2% lipids. According to Ortiz *et al.* [32], the carbohydrate, protein, and lipid contents of *Ulva lactuca* totaled 61.5%, 27.2%, and 0.3%, respectively. Thus, the carbohydrate and lipid content of *Ulva lactuca* in this study was higher than that of previous studies. Moreover, the protein content of *Ulva lactuca* from this study reached 14.74%. Thus, the protein content of this study is notably lower than that of a previous study [32].

The comparison of *Ulva lactuca*, *Spirulina platensis* and *Chlorella sp.* shows that the highest carbohydrate content of 74.82% was obtained from *Ulva lactuca*, agreeing with the result of previous research reporting that several types of *Ulva* species such as *Ulvaria oxysperma* contain rich carbohydrate content. The differences in carbohydrate content are due to the accumulation of carbohydrates, especially in cell walls, in response to environmental conditions, indicating the high photosynthetic process in the algal habitat.

**Table 1. The proximate analysis of dried algae type *Spirulina platensis*, *Chlorella sp.*, and *Ulva lactuca*.**

No	Components	Component (%)					Reference
		Carbohydrates	Proteins	Lipids	Ash	Water	
1	<i>Spirulina platensis</i>	53.85	32.11	1.89	7.69	4.45	This study
2	<i>Spirulina platensis</i>	13.6	-	-	-	-	Um and Kim 2009
3	<i>Chlorella sp.</i>	55.39	14.32	11.37	7.89	11.0	This study
4	<i>Chlorella vulgaris</i>	12-17	51-58	14-22	-	-	Um and Kim 2009
5	<i>Chlorella pyrenoidosa</i>	26	57	2	-	-	Um and Kim 2009
6	<i>Ulva lactuca</i>	74.82	14.74	2	2.97	5.44	This study
7	<i>Ulva lactuca</i> (flour)	61.5	27.2	0.3	-	-	Ortiz <i>et al.</i> 2006
8	<i>Ulvaria oxysperma</i>	46-72	-	-	-	-	Harun <i>et al.</i> 2009

##### 3.1.2 Hemicellulose, cellulose, and lignin content

Table 2 shows the hemicellulose, cellulose, and lignin contents of several algae, including *Spirulina platensis*, *Chlorella sp.*, and *Ulva lactuca*. Carbohydrates such as starch accumulate in the algal plastids or become a cell wall, which contains cellulose, hemicellulose, glycoprotein, pectin, alginate, and agar [13]. As shown in Table 2, *Spirulina platensis* contained 37.82% cellulose, 47.47% hemicellulose, and 13.28% lignin. Also, *Chlorella sp.* comprised 30.3% cellulose, 67.37% hemicellulose, and 0.77% lignin. *Ulva lactuca* from this study contained 45.07% cellulose, 18.24% hemicellulose, and 7.02% lignin. In general, from this work, the highest cellulose content was achieved by *Ulva lactuca*, whereas the lowest cellulose content was obtained from *Chlorella sp.* A previous study reported

that *Ulva lactuca* contains 9% cellulose, 20.6% hemicellulose, and 1.7% lignin [33]. Sui *et al.* [34] reported that *Chlorella* cells main contain 8.6% polysaccharides.

The comparison showed that the cellulose content of *Ulva lactuca* from this study is higher than that of previous research. However, the hemicellulose obtained from this study is lower than *Spirulina platensis* and *Chlorella sp.* The difference in cellulose content of each type of algae possibly occurred depending on the chemical composition of algae, which varies with species, habitat, maturity, and environmental condition [34]. Cellulose and hemicellulose are bound to rigid cell walls making it challenging to release starch as a source of carbon for the fermentation process and to convert cellulose and hemicellulose into simple sugars [35].

**Table 2. Hemicellulose, cellulose, and lignin contents of algal materials.**


Algae	Component			Reference
	Hemicellulose (%)	Cellulose (%)	Lignin (%)	
<i>Spirulina platensis</i>	47.47	37.82	13.28	This study
<i>Chlorella sp.</i>	67.37	30.30	0.77	This study
<i>Ulva lactuca</i>	18.24	45.07	7.02	This study
<i>Ulva lactuca</i>	20.60	9.13	1.56	Yaich et al. (2011)

From this work, the highest lignin content was achieved by *Spirulina platensis*, whereas the lowest lignin content was obtained from *Chlorella sp.* The lignin content of *Ulva lactuca* in this study was higher than that of previous research.

The lignin obtained in this study, as also observed in a previous work, was tightly bound to cellulose and hemicellulose. This component is a long chain or branch that forms in the cell wall [36]. The presence of lignin in macroalgae also was reported by Ramachandra and Hebbale [37] who observed that macroalgae contained high concentration of structural polysaccharides and low lignin contents, therefore requiring mild and low-cost processes for the extraction of sugars.

### 3.1.3 Morphology evaluation

Figure 1 shows the surface structure of (a) *Chlorella sp.*, (b) *Spirulina platensis*, and (c) *Ulva lactuca* raw materials using SEM analysis at magnification of 500–5000 x. *Spirulina platensis* and *Chlorella sp.* featured smooth, irregularly shaped, and stiff surface structure, whereas *Ulva lactuca* exhibited a denser and unhollowed surface than *Chlorella sp.* and *Spirulina platensis*. Similar to a previous study that analyzed the surface structure of sea algae (*Monostroma nitidum*) with SEM, the SEM images showed the framework of the green alga before hydrothermal pretreatment, allowing for observation [38].

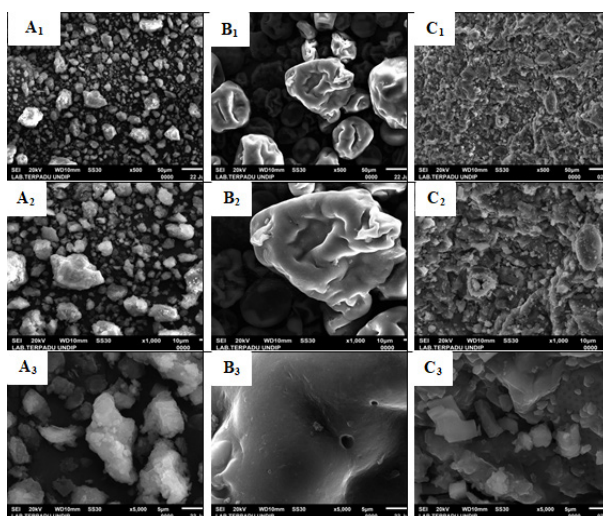

**Fig. 1. SEM micrographs of (A) *Chlorella sp.*, (B) *Spirulina platensis*, and (C) *Ulva lactuca* raw materials at 500 (A<sub>1</sub>–C<sub>1</sub>), 1000 (A<sub>2</sub>–C<sub>2</sub>), and 5000x (A<sub>3</sub>–C<sub>3</sub>) magnification.**

## 3.2 Analysis of Algae

### 3.2.1 Effect of sulfuric acid concentration on acid hydrolysis

The hydrolysis process breaks the rigid algal cell wall by breaking the intermolecular connection between hemicellulose and other polymer components, thus enhance the accessibility of yeast in the fermentation process. High cellulose and hemicellulose contents are used to produce sugar monomers in the form of glucose [36]. Several factors, such as acid concentration, hydrolysis time, and temperature affect the acid hydrolysis of algal biomass into fermentable sugars.

Figure 2 shows the effect of H<sub>2</sub>SO<sub>4</sub> concentration on the total sugar of *Spirulina platensis*, *Chlorella sp.*, and *Ulva lactuca*. Water hydrolysis was used as a control and acid hydrolysis with different H<sub>2</sub>SO<sub>4</sub> concentrations (0.5–2 N) at 80°C for 60 min were used for evaluation. The water hydrolysis of *Spirulina platensis*, *Chlorella sp.*, and *Ulva lactuca* produced total sugars of 0.87–3.04% (v/v), whereas the acid hydrolysis yielded higher total sugar content of 1.97–13.11% (v/v). The highest total sugar content (10.44%; v/v) was obtained from *Spirulina platensis* biomass at 2 N H<sub>2</sub>SO<sub>4</sub> at 80°C for 60 min. The acid hydrolysis of *Spirulina platensis* using 0.25–2.5 N HNO<sub>3</sub> was also investigated by a previous study [19]. The maximum reducing sugar yield (98%; v/v) was obtained at 2.5 N HNO<sub>3</sub> for 90 min at high acid concentrations. This result was due to the positive effect of increased acid concentration on the hydrolysis rates at the temperatures of 80–100°C [19]. Previously, acid pretreatment of microalgae that had different carbohydrates contents had been frequently studied. It showed that mostly carbohydrates contents was stored in the cell wall, therefore acid pretreatment were used for cell wall disruption. The high concentration of sulfuric acid was necessary to release the entrapped carbohydrates for use as a carbon source during the fermentation process [39].

Figure 2 shows the effect of H<sub>2</sub>SO<sub>4</sub> concentration on the *Chlorella sp.* biomass. The highest total sugar content (4.37%; v/v) was obtained at 2 N H<sub>2</sub>SO<sub>4</sub> for 90 min, whereas the lowest value of 1.54% (v/v) was observed when using 0.5 N H<sub>2</sub>SO<sub>4</sub>. The result was in agreement with previous studies of acid hydrolysis of *Chlorella sp.* that reported the increasing HCl concentration from 0.5 to 2% led to produce an increase of total sugar from 6.77 to 43.78%. The results show that the acid catalyst was required to convert many feedstocks in *Chlorella sp.* to fermentable sugars [40].

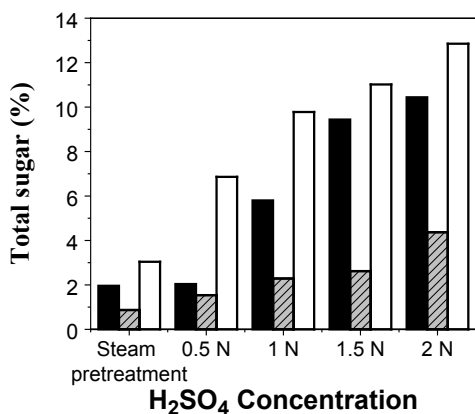


Fig. 2. Effect of H<sub>2</sub>SO<sub>4</sub> concentration on the acid hydrolysis of *Spirulina platensis* (■), *Chlorella Sp.* (▨) and *Ulva lactuca* (□) (80°C, 60 min).

Figure 2 also shows the effect of H<sub>2</sub>SO<sub>4</sub> concentration on the *Ulva lactuca* biomass. The highest total sugar concentration of *Ulva lactuca* (12.85%; v/v) was obtained at 2 N H<sub>2</sub>SO<sub>4</sub> at 80°C for 60 min. A previous study investigated the acid hydrolysis of *Ulva lactuca* [41]. The highest reducing sugar concentration (0.07 g.g<sup>-1</sup>) of *Ulva lactuca* was obtained using 1 N H<sub>2</sub>SO<sub>4</sub>. Acid pretreatment by H<sub>2</sub>SO<sub>4</sub> (2 N), at 120°C for 30 min was examined using the dried biomass of microalga *Scenedesmus obliquus*. The results revealed that the pretreatment with sulfuric acid was crucial for the conversion of complex carbohydrates and sugars into simple sugars [18]. Previous studied on the pretreatment using acids such as H<sub>3</sub>PO<sub>4</sub> on the trees (*Samanea saman*) to produce bioethanol had also been carried out. Total sugar after pretreatment of 9.4% was obtained from the H<sub>3</sub>PO<sub>4</sub> treatment. The results also showed that acid pretreatment could increase the total of sugar released [42]. However, the acid concentration is a major operational parameter that could affect the saccharification of microalgal biomass. When the concentration of acid was raised from 4 to 7% H<sub>2</sub>SO<sub>4</sub> concentration, a small increase in reducing sugars was observed, but the content diminished when a 10% H<sub>2</sub>SO<sub>4</sub> was applied. The decrease in reducing sugar might be attributed to the degradation of monosaccharides into sugar degradation products (such as furfural, hydroxymethylfurfural (HMF), propionic acid, acetic acid, formic acid, and lactic acid) [43]. Moreover, the use of high concentrations of acid (more than 3%) led to the corrosion of the experimental equipment. Pretreatment with dilute acid at low acid concentrations was carried out to avoid the use of high amounts of neutralizing agents in acid hydrolysis [44]. From Figure 2, the comparison between *Spirulina platensis*, *Chlorella sp.*, and *Ulva lactuca* shows that the total sugar of *Ulva lactuca* at 2N H<sub>2</sub>SO<sub>4</sub> of 12.8% (v/v) was the highest than that of *Spirulina platensis* and *Chlorella sp.* after hydrolysis. Therefore, *Ulva lactuca* was further used as a raw material to investigate the effect of time and temperature on the hydrolysis process and fermentation.

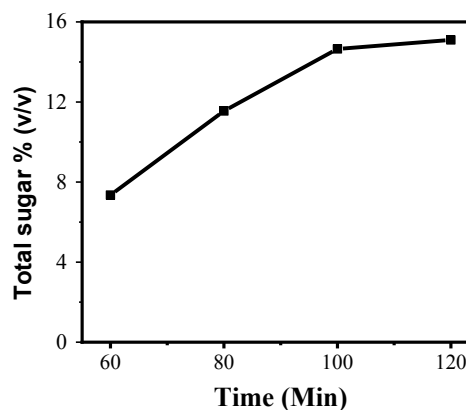


Fig. 3. Acid hydrolysis of *Ulva lactuca* at different times using 2 N H<sub>2</sub>SO<sub>4</sub> at 80°C.

### 3.2.2 Effect of hydrolysis time

Figure 3 shows the relationship between different hydrolysis times (60–120 min) and the total sugars obtained after acid hydrolysis of *Ulva lactuca* biomass. The hydrolysis process was conducted using 2 N H<sub>2</sub>SO<sub>4</sub> at 80°C. The increased total sugar concentration between 7.35–15.10% (v/v) was obtained with increasing hydrolysis time. The highest total sugar concentration (15.10%; v/v) was reached at 120 min. The results obtained in this study are similar to those obtained by Nguyen *et al.* [44], who reported that prolonging the hydrolysis time of *Chlamydomonas reinhardtii* increased the release of sugar, until the saturation level was influenced by acid dosage and temperature conditions. Trivedi *et al.* [45] evaluated the effect of time hydrolysis of *Ulva fasciata Delile* as raw material by using cellulase. The reducing sugar yields of 72.73–168.15 mg.g<sup>-1</sup> were obtained at an increasing incubation time of 6–36 h. However, when hydrolysis time increased to 42 h, reducing sugar yields gradually decreased to 151 mg.g<sup>-1</sup>. The decreased reducing sugar confirmed that the prolonged residence time for hydrolysis causes sugars to degrade to form inhibitor agents, such as HMF or furfural. Hydrolysis time can affect the total sugar, the longer the hydrolysis time can increase the total sugar value. However, this investigation only focuses on the effects of time and the best of time condition does not use to investigate the effect of temperature.

### 3.2.3 Effect of hydrolysis temperature

Figure 4 shows the effect of different temperatures (40–100°C) on the total sugars after acid hydrolysis of *Ulva lactuca* biomass. The hydrolysis was carried out using 2 N H<sub>2</sub>SO<sub>4</sub> at 60 min. The results show that the highest total sugar concentration (23.04%; v/v) was obtained at a temperature of 100°C. This result corresponded with that of previous studies. Microalgal saccharification using dilute acid hydrolysis at different temperatures (23–90°C) was also investigated by Chng *et al.* [46]. Their results showed that the sugar yield significantly increased when the temperature was 80–90°C. By contrast, the lowest sugar yield was obtained at lower temperatures of 23–30°C and 45–55°C. Hydrothermal



acid pretreatment of *Chlamydomonas reinhardtii* for ethanol production was studied previously [44]. The results showed that the maximum yields of glucose increased with the increase in acid concentration and temperature. The maximum release of glucose was 28.5 g/l, which corresponded to 58% (w/w) of dry cell weight, at 110°C after 30 min of residence time with 3% sulfuric acid. Temperature affects the sugar released during hydrolysis because it can extend residence time so and the more sugar is released.

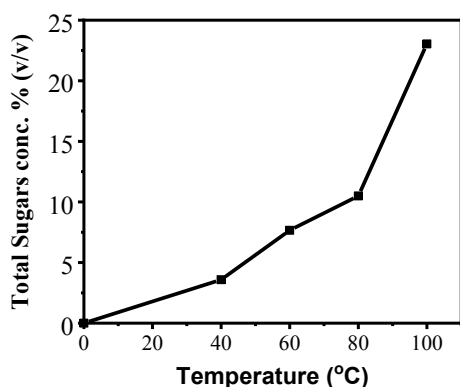


Fig. 4. Acid hydrolysis of *Ulva lactuca* using 2 N H<sub>2</sub>SO<sub>4</sub> at different temperatures for 60 min.

### 3.3 SHF Process

Figure 5 shows the concentration of bioethanol and total residual sugars from the fermentation process of *Ulva lactuca* hydrolysate using 2 N H<sub>2</sub>SO<sub>4</sub> at 80°C for 60 min. The condition was chosen according to the main conditions when searching for the highest total sugar value in the microalgae variation (*Spirulina platensis*, *Chlorella sp.*, and *Ulva lactuca*). Figure 5 shows that the bioethanol concentration sharply increased, and the highest bioethanol concentration of 1.45% (v/v) was obtained at 72 h. By contrast, the total sugar concentration decreased until all sugars have been consumed within 48 h of fermentation. A similar finding on the fermentation process of carbohydrate-rich *Scenedesmus dimorphus* was also reported by Chng *et al.* [46]. Glucose was consumed at a fast rate, but the amount of bioethanol produced was comparatively low. *Saccharomyces cerevisiae* metabolism that converts sugar to ethanol occurred slower due to the use of an acetate buffer in enzyme hydrolysis, which affects the acidity of fermentation. The acid hydrolyzed by microalga *Chlorella vulgaris* FSP-E was investigated for ethanol production via the SHF process using optimal acidic hydrolysis conditions (1% sulfuric acid, 121°C, and 20 min hydrolysis time) by Ho *et al.* [15]. The results revealed that the maximum ethanol concentration of 11.66 g/L was obtained within 12 h. The feasibility of dilute acid hydrolysis is recommended due to its lower cost and cost-effectiveness compared with enzymatic hydrolysis, leading to a fivefold shorter SHF operation time (from 60 h to 12 h). The acid hydrolysis of carbohydrate in illes-illes starch as raw material for bioethanol was reported by Kusmiyati *et al.* [47]. The results of the study produced higher ethanol (8.63%) at

similar time fermentation (72 hours) than that from *Ulva lactuca*.

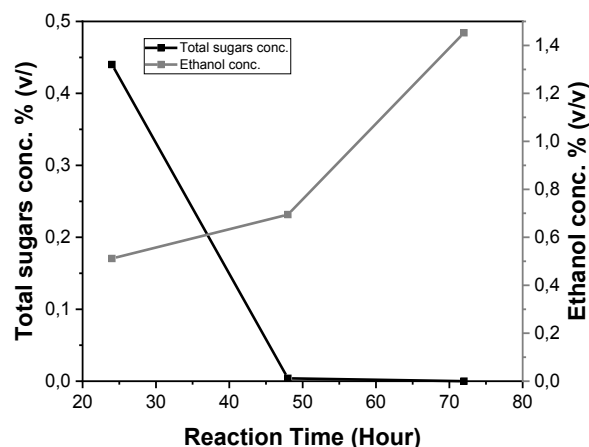


Fig. 5. Fermentation of *Ulva lactuca* biomass hydrolysate for ethanol production by the SHF process.

Table 3 shows the effect of retention time on the fermentation of *Ulva lactuca* for 24–72 h time on residual glucose. The lowest residual glucose concentration of fermentation (329.04 mg/L) was obtained at the retention time of 72 h. When the retention time of fermentation was increased from 24–72 h, the residual glucose concentration decreased significantly from 1648.38 to 329.04 mg/L. Ho *et al.* [15] reported that the residual glucose concentration from simultaneous saccharification and fermentation of *Chlorella vulgaris* FSP-E decreased from 0.5 g/L to nearly 0 g/L when the fermentation time was increased from 12 to 36 h. Furthermore, the residual glucose concentration from the SHF of *Chlorella vulgaris* FSP-E has slowly decreased from 23.6–0 g/L when the fermentation time was increased from 6 h to 24 h. The decreased residual glucose concentration with increased time was also confirmed by Chng *et al.* [46].

Table 3. Concentration of glucose during fermentation.

Time fermentation (h)	Glucose (mg/L)
24	1648.38
48	1414.02
72	329.04

## 4. CONCLUSION

The acid hydrolysis of microalgae *Spirulina platensis* and *Chlorella sp.* and macroalga *Ulva lactuca* has been studied following the SHF methods for bioethanol production. Low acid concentrations for the hydrolysis process show potential for overcoming obstacles, which include the carbohydrate starch granules that are bound within the rigid cell walls of algae. Results showed the highest total sugar concentration of acid hydrolysis (12.85%; v/v) when hydrolysis was performed on *Ulva lactuca* biomass using 2 N H<sub>2</sub>SO<sub>4</sub> at 80°C for 60 min. Given this result, *Ulva lactuca* was used to investigate the effect of time and temperature on acid hydrolysis. The maximum total sugars of 23.04% (v/v) from *Ulva*

*lactuca* was obtained at hydrolysis conditions of 2 N H<sub>2</sub>SO<sub>4</sub> at 80°C for 60 min. Then, the fermentation process using *Saccharomyces cerevisiae* for *Ulva lactuca* hydrolysate resulted in the highest bioethanol concentration of 1.45% (v/v) at 72 h fermentation. The fermentation time showed a significant effect on the production of bioethanol from *Ulva lactuca*. A prolonged fermentation process gives the yeast chance to grow and convert monomer sugars into bioethanol. However, fermentation with a long duration will result in a toxic effect on yeast growth given the high ethanol accumulation.

#### ACKNOWLEDGEMENT

The authors gratefully thank for research grant received from the Ministry of the Higher Education, Research and Technology of Indonesia (Kemendiknas) based on contract number; 7/E/KPT/2019; 228/SP2H/LT/DRPM/2019; 026/L6/AK/SPH.1; 060/A38.04/UDN-09/V/2019.

#### REFERENCES

- [1] Vohra M., Manwar J., Manmode R., Padgilwar S., and Patil S., 2014. Bioethanol production: Feedstock and current technologies. *Journal of Environmental Chemical Engineering* 2(1): 573-584.
- [2] BP Statistical Review of World Energy Statistical Review of World .2019. *The Editor BP Statistical Review of World Energy*, 1–69.
- [3] Sopian K. and W.R. Daud. 2006. Challenges and future developments in proton exchange membrane fuel cells. *Renewable Energy* 31(5): 719-727.
- [4] Alam F., Date A., Rasjidin R., Mobin S., Moria H., and Ui A., 2012. Biofuel from algae-Is it a viable alternative?. *Procedia Engineering* 49: 221-227.
- [5] Demirbas A., 2008. Biofuels sources, biofuel policy, biofuel economy and global biofuel projections. *Energy Conversion and Management* 49(8): 2106-2116.
- [6] Balat M., Balat H., and Öz C., 2008. Progress in bioethanol processing. *Progress in Energy and Combustion Science* 34(5): 551-573.
- [7] Hirani A.H., Javed N., Asif M., Basu S.K., and Kumar A., 2018. A review on first-and second-generation biofuel productions. In *Biofuels: Greenhouse Gas Mitigation and Global Warming* (pp. 141-154). Springer, New Delhi.
- [8] Deenanath E.D., Iyuke S., and Rumbold K. 2012. The bioethanol industry in Sub-Saharan Africa: history, challenges, and prospects. *BioMed Research International* 2012: 1-11.
- [9] Arifin Y., Tanudjaja E., Dimiyati A. and Pinontoan R., 2014. A second generation biofuel from cellulosic agricultural by-product fermentation using clostridial species for electricity generation. *Energy Procedia* 47: 310-315.
- [10] Aditiya H.B., Mahlia T.M.I., Chong W.T., Nur H., and Sebayang A.H., 2016. Second generation bioethanol production: A critical review. *Renewable and Sustainable Energy Reviews* 66: 631-653.
- [11] Zhu L., Li S., Hu T., Nugroho Y.K., Yin Z., Hu D., Chu R., Mo F., Liu C., and Hiltunen E., 2019. Effects of nitrogen source heterogeneity on nutrient removal and biodiesel production of mono-and mix-cultured microalgae. *Energy Conversion and Management* 201(9): 112-144.
- [12] Dragone G., Fernandes B.D., Abreu A.P., Vicente, A.A., and Teixeira J.A., 2011. Nutrient limitation as a strategy for increasing starch accumulation in microalgae. *Applied Energy* 88(10): 3331-3335.
- [13] Chen C.Y., Zhao X.Q., Yen H.W., Ho S.H., Cheng, C.L., Lee D.J., Bai F.W., and Chang J.S., 2013. Microalgae-based carbohydrates for biofuel production. *Biochemical Engineering Journal* 78: 1-10.
- [14] de Farias Silva C.E. and A. Bertucco. 2016. Bioethanol from microalgae and cyanobacteria: a review and technological outlook. *Process Biochemistry* 51(11): 1833-1842.
- [15] Ho S.H., Huang S.W., Chen C.Y., Hasunuma T., Kondo A., and Chang, J.S., 2013. Bioethanol production using carbohydrate-rich microalgae biomass as feedstock. *Bioresource Technology*, 135: 191-198.
- [16] Wang L., Li Y., Sommerfeld M., and Hu Q., 2013. A flexible culture process for production of the green microalga *Scenedesmus dimorphus* rich in protein, carbohydrate or lipid. *Bioresource Technology* 129: 289-295.
- [17] Harun R. and M.K. Danquah. 2011. Enzymatic hydrolysis of microalgal biomass for bioethanol production. *Chemical Engineering Journal* 168(3): 1079-1084.
- [18] Cheng Y.S., Zheng Y., Labavitch J.M., and VanderGheynst J.S. 2011. The impact of cell wall carbohydrate composition on the chitosan flocculation of *Chlorella*. *Process Biochemistry*, 46(10): 1927-1933.
- [19] Markou G., Angelidaki I., Nerantzis E., and Georgakakis D., 2013. Bioethanol production by carbohydrate-enriched biomass of *Arthrospira* (*Spirulina*) platensis. *Energies* 6(8): 3937-3950.
- [20] Sirajunnisa A.R. and D. Surendhiran. 2016. Algae–A quintessential and positive resource of bioethanol production: A comprehensive review. *Renewable and Sustainable Energy Reviews* 66: 248-267.
- [21] John R.P., Anisha G.S., Nampoothiri K.M., and Pandey A., 2011. Micro and macroalgal biomass: a renewable source for bioethanol. *Bioresource Technology* 102(1): 186-193.
- [22] Jambo S.A., Abdulla R., Azhar S.H.M., Marbawi H., Gansau J.A., and Ravindra P. 2016. A review on third generation bioethanol feedstock. *Renewable and Sustainable Energy Reviews* 65: 756-769.
- [23] Rabelo S.C., Maciel Filho R., and Costa A.C. 2009. Lime pretreatment of sugarcane bagasse for



- bioethanol production. *Applied Biochemistry and Biotechnology* 153(1-3): 139-150.
- [24] Kim K.H., Choi I.S., Kim H.M., Wi S.G., and Bae H.J. 2014. Bioethanol production from the nutrient stress-induced microalga *Chlorella vulgaris* by enzymatic hydrolysis and immobilized yeast fermentation. *Bioresource Technology* 153: 47-54.
- [25] Cheng J.J. and G.R. Timilsina. 2011. Status and barriers of advanced biofuel technologies: a review. *Renewable Energy* 36(12): 3541-3549.
- [26] Iranmahboob J., Nadim F., and Monemi S., 2002. Optimizing acid-hydrolysis: a critical step for production of ethanol from mixed wood chips. *Biomass and Bioenergy* 22(5): 401-404.
- [27] Chatzifotis S. and T. Takeuchi. 1997. Effect of supplemental carnitine on body weight loss, proximate and lipid compositions and carnitine content of red sea bream (*Pagrus major*) during starvation. *Aquaculture* 158(1-2): 129-140.
- [28] Lynch J.M. and D.M. Barbano. 1999. Kjeldahl nitrogen analysis as a reference method for protein determination in dairy products. *Journal of AOAC International* 82(6): 1389-1398.
- [29] Trisant P.N. and I. Gunardi. 2020. The Influence of Hydrolysis Time in Hydrothermal Process of Cellulose from Sengon Wood Sawdust. *In Macromolecular Symposia* 391(1): 2000016, 1-5.
- [30] Um B.H. and Y.S. Kim. 2009. A chance for Korea to advance algal-biodiesel technology. *Journal of Industrial and Engineering Chemistry* 15(1): 1-7.
- [31] Khoeyi Z.A., Seyfabadi J., and Ramezanpour Z., 2012. Effect of light intensity and photoperiod on biomass and fatty acid composition of the microalgae, *Chlorella vulgaris*. *Aquaculture International* 20(1): 41-49.
- [32] Ortiz J., Romero N., Robert P., Araya J., Lopez-Hernández J., Bozzo C., Navarreta E., Osorio A., and Rios A., 2006. Dietary fiber, amino acid, fatty acid and tocopherol contents of the edible seaweeds *Ulva lactuca* and *Durvillaea antarctica*. *Food chemistry* 99(1): 98-104.
- [33] Yaich H., Garna H., Besbes S., Paquot M., Blecker, C., and Attia H., 2011. Chemical composition and functional properties of *Ulva lactuca* seaweed collected in Tunisia. *Food Chemistry* 128(4): 895-901.
- [34] Sui Z., Gizaw Y., and BeMiller J.N., 2012. Extraction of polysaccharides from a species of *Chlorella*. *Carbohydrate Polymers* 90(1): 1-7.
- [35] Harun R., Danquah M.K., and Forde G.M., 2010. Microalgal biomass as a fermentation feedstock for bioethanol production. *Journal of Chemical Technology and Biotechnology* 85(2): 199-203.
- [36] Borines M.G., de Leon R.L., and Cuello J.L., 2013. Bioethanol production from the macroalgae *Sargassum spp.* *Bioresource Technology* 138: 22-29.
- [37] Ramachandra T.V., and D. Hebbale. 2020. Bioethanol from macroalgae: Prospects and challenges. *Renewable and Sustainable Energy Reviews* 117: 109-479.
- [38] Okuda K., Oka K., Onda A., Kajiyoshi K., Hiraoka M., and Yanagisawa K. 2008. Hydrothermal fractional pretreatment of sea algae and its enhanced enzymatic hydrolysis. *Journal of Chemical Technology and Biotechnology: International Research in Process, Environmental and Clean Technology* 83(6): 836-841.
- [39] Harun R. and M.K. Danquah. 2011. Influence of acid pre-treatment on microalgal biomass for bioethanol production. *Process Biochemistry* 46(1): 304-309.
- [40] Zhou N., Zhang Y., Wu X., Gong X., and Wang, Q. 2011. Hydrolysis of *Chlorella* biomass for fermentable sugars in the presence of HCl and MgCl<sub>2</sub>. *Bioresource Technology* 102(21): 10158-10161.
- [41] El-Sayed W.M.M., Ibrahim H.A.H., Abdul-Raouf U.M., and El-Nagar M.M., 2016. Evaluation of bioethanol production from *Ulva lactuca* by *Saccharomyces cerevisiae*. *J Biotechnol Biomater* 6(226): 2: 1-10.
- [42] Kusmiyati K., Kurniawan S.A., Azis A., Aryadi T., and Hadiyanto H., 2018. Enzymatic hydrolysis and bioethanol production from *Samanea Saman* Using Simultaneous Saccharification and fermentation by *Saccharomyces Cerevisiae* and *Pichia Stipitis*. *Scientific Study and Research. Chemistry and Chemical Engineering, Biotechnology, Food Industry* 19(2): 157-167.
- [43] Hernández D., Riaño B., Coca M., and García-González M.C., 2015. Saccharification of carbohydrates in microalgal biomass by physical, chemical and enzymatic pre-treatments as a previous step for bioethanol production. *Chemical Engineering Journal* 262: 939-945.
- [44] Nguyen M.T., Choi S.P., Lee J., Lee J.H., and Sim S.J., 2009. Hydrothermal acid pretreatment of *Chlamydomonas reinhardtii* biomass for ethanol production. *J Microbiol Biotechnol* 19(2): 161-166.
- [45] Trivedi N., Gupta V., Reddy C.R.K., and Jha B., 2013. Enzymatic hydrolysis and production of bioethanol from common macrophytic green alga *Ulva fasciata Delile*. *Bioresource Technology* 150: 106-112.
- [46] Chng L.M., Lee K.T., and Chan D.J.C., 2017. Synergistic effect of pretreatment and fermentation process on carbohydrate-rich *Scenedesmus dimorphus* for bioethanol production. *Energy Conversion and Management* 141: 410-419.
- [47] Kusmiyati K., Hadiyanto H., and Kusumadewi I., 2016. Bioethanol Production from *Iles-Iles (Amorphopallus campanulatus)* Flour by Fermentation using *Zymomonas mobilis*. *International Journal of Renewable Energy Development* 5(1): 9.









## International Energy Journal



**Editor**, Prof. Weerakorn Ongsakul  
**Assistant Editor**, Maria Kathrina B. Gratuito

### Published by:

**REGIONAL ENERGY RESOURCES INFORMATION CENTER (ERIC)**  
 Department of Energy, Environment and Climate Change  
 School of Environment, Resources and Development  
**ASIAN INSTITUTE OF TECHNOLOGY**  
 P.O. Box 4, Klong Luang  
 Pathumthani 12120, Thailand  
 Tel: +66-2-524-6216; 524-54143  
 Fax: +66-2-524-5439  
 E-mail: rericjournal@ait.ac.th

If you are interested to submit your paper, [CLICK HERE](#)

Please read carefully the [AUTHOR GUIDELINES](#) before submitting.

### ABOUT THE JOURNAL:

The International Energy Journal is a quarterly publication published by RERIC in March, June, September and December of each year. Papers on technological, socio-economic and environmental aspects of energy economics and planning, energy conservation, and renewable energy resources (biomass, solar, wind, and small-scale hydropower) are published. The IEJ is proud to be included in the [Emerging Sources Citation Index](#) of Clarivate Analytics (Web of Science™ Core Collection). It is also indexed and abstracted in the [Scopus title list](#), and has a listing and ranking in the [SJR \(SCImago Journal and Country Rank\)](#). It is also listed in the [EI Compendex Journal Source List](#) (Compendex Database of Engineering Information, Inc.). The IEJ, which is housed in the [Asian Institute of Technology](#) (a leading post-graduate academic institution in the region), is also the only Energy-category focused international journal published in Thailand.

Bibliographic & Ordering Information ([SUBSCRIPTION FORM](#))

**ISSN:** 1513-718X

**Imprint:** RERIC

**Commenced Publication:** 1979

**Publisher:** RERIC, Asian Institute of Technology, Thailand

**Review Method:** Double-blind

**Average number of days to decision (2021):** 167

**Audience:** Energy researchers, professionals, planners, policy makers, members of the academe and energy supply sector.

## Announcements

### Journal: List of Reviewers (2021)

The **International Energy Journal (IEJ)** sincerely expresses gratitude to the following individuals who took time to review papers submitted to the journal. Without their patience, Volume 21 (Issues 1-4) 2021 of IEJ would not have been possible.

Posted: 2021-12-07

[More...](#)

### Journal: Volume 21, Special Issue 1A, January 2021: Bangabandhu Chair Special Issue (Volume 2)



**Bangabandhu Chair Special Issue (Volume 2): Energy, Disaster, Climate Change: Sustainability and Just Transitions in Bangladesh**

*Guest Editors:*

**Prof. Iovashree Roy** (iovashree@ait.asia), Bangabandhu

USER

Username

Password

Remember me



Scopus<sup>®</sup>



1.2 2021 CiteScore

31st percentile Powered by Scopus

1.5 2022 CiteScoreTracker

31st percentile Powered by Scopus

International Energy Journ

Q3 Energy (miscellaneous) best quart

SJR 2021 0.24 powered by scimagojr.co

JOURNAL CONTENT

Search

Search Scope

All

Browse

- » By Issue
- » By Author
- » By Title

FONT SIZE



Chair Professor, Sustainable Energy Transition Program, Department of Energy, Environment and Climate Change, School of Environment Resources and Development, Asian Institute of Technology, Thailand.

Professor of Economics, Jadavpur University, India (on lien).


**Prof. Sheikh Tawhidul Islam** (s.t.islam@juniv.edu). Professor, Department of Geography and Environment; Director, Institute of Remote Sensing, Jahangirnagar University, Bangladesh.

**Dr. Indrajit Pal** (indrajit-pal@ait.ac.th). Assistant Professor and Chair, Disaster Preparedness, Mitigation and Management, Department of Development and Sustainability, School of Environment Resources and Development, Asian Institute of Technology, Thailand.

[DOWNLOAD THE FULL VOLUME HERE](#)

Posted: 2021-03-04

## Journal: Volume 20, Special Issue 3A, October 2020: Bangabandhu Chair Special Issue (Volume 1)

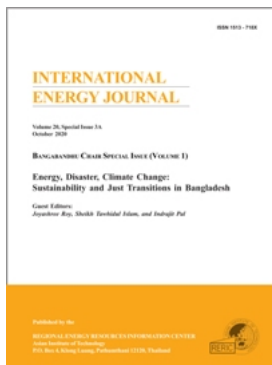

**Bangabandhu Chair Special Issue (Volume 1): Energy, Disaster, Climate Change: Sustainability and Just Transitions in Bangladesh**

Guest Editors:

**Prof. Joyashree Roy** (joyashree@ait.asia). Bangabandhu Chair Professor, Sustainable Energy Transition Program, Department of Energy, Environment and Climate Change, School of Environment Resources and Development, Asian Institute of Technology, Thailand.

Professor of Economics, Jadavpur University, India (on lien).

**Prof. Sheikh Tawhidul Islam** (s.t.islam@juniv.edu). Professor, Department of Geography and Environment; Director, Institute of Remote Sensing, Jahangirnagar University, Bangladesh.

**Dr. Indrajit Pal** (indrajit-pal@ait.ac.th). Assistant Professor and Chair, Disaster Preparedness, Mitigation and Management, Department of Development and Sustainability, School of Environment Resources and Development, Asian Institute of Technology, Thailand.

[DOWNLOAD THE FULL VOLUME HERE](#)

Posted: 2021-03-04

[More Announcements...](#)

## Volume 23, Issue 1, March 2023

### Table of Contents

#### Articles

**Remittance Inflows, Economic Output, Electricity Use and CO2 Emissions in the D-8 Countries: A Panel ARDL Analysis**

PDF

*Temitayo Blessing Majekodunmi, Mohd Shahidan Shaari, Noorazeela Zainol Abidin, Nor Hidayah Harun, Siti Nur Fathini Muhsain*

**Community-Based Solar Photovoltaic Distributed Generation and its Effect on Distribution**

PDF

*Tony Khristanto Hariadi, Teguh Nugroho, Agus Jamal, Pamungkas Jutta Prahara*

**A New Hybrid Model using WTBPNN-EHO and LSTM with EMD-WOA Signal Decomposition for mid and Long-Term Electricity Load Forecasting**

PDF

*Mesbaholdin Salami, Masoumeh Rostam Niakan, Masoud Hasani Marzooni, Kioumars Heydari*

NOTIFICATIONS

» [View](#)  
» [Subscribe](#)

[OPEN JOURNAL SYSTEMS](#)

[JOURNAL HELP](#)

**Increasing of High Heating Value of Organic Waste by Microwave-Assisted Drying Pretreatment**

*Jakkrit Saengpeng, Kittisak Khuwaranyu, Duangkamol Ruen-ngam*

**The Use of Neural Network Coupled with Image Processing for Water Quality Assessment (Location: Hot Spring Mae-Khachan, Thailand)**

*Wahyu Nurkholis Hadi Syahputra, Chatchawan Chaichana, Wasin Wingwilai, Braja Manggala*

**Asian Institute of Technology**

REGIONAL ENERGY RESOURCES INFORMATION CENTER

P.O.Box 4, Klong Luang, Pathumthani 12120, Thailand







## Editorial Policies

- Focus and Scope
- Section Policies
- Peer Review Process
- Open Access Policy
- Archiving
- About RERIC
- Advisory and Editorial Board

## Focus and Scope

The journal provides a forum exchange of information, innovative and critical ideas on a wide range of issues in energy. The issues are addressed in four major areas as follows:

- Energy economics and policy including energy demand and supply study, resources document, transportation and conversion pricing, modeling, security and organizational structure,
- Energy technology including energy exploration, conversion, transportation technologies, utilization technologies such as rational use of energy in industry, energy efficient building system, system simulation, and cogeneration,
- Energy regulation, promotion, and environmental concerns including analysis of energy systems structure, restructuring, regulation and promotion for energy conservation, clean development mechanism, and energy enhancement of social development,
- Electric power system including electricity demand forecasting and planning, electric supply structure and economics, power system dynamics and stability, power system operation and control, and power distribution.

## Section Policies

### Articles

- Open Submissions  Indexed  Peer Reviewed

## Peer Review Process

The **International Energy Journal (IEJ)** follows a strict, blind peer-review process with AT LEAST two(2) reviewers. The reviewers are contacted and submits their review by email. Reviewers are given 4 weeks to review each submission. All reviewers are annually acknowledged at the published **LIST OF REVIEWERS**.

The criteria given to reviewers for evaluation of papers submitted by authors are explained below. This additional guidance is given so that authors submitting papers to Energy can understand better how their papers will be reviewed. The **Reviewers' Evaluation Report** is intended for reviewers and is reproduced in a form which can be completed electronically. Click here to open this as a Word document. Reviewers of International Energy Journal are invited to send their Evaluation Report by email to [relicjournal@ait.asia](mailto:relicjournal@ait.asia)

### The criteria given to Reviewers for paper evaluation are:

1. Relevance to the scope of International Energy Journal
2. Originality
3. Engineering/scientific relevance
4. Doubtful or controversial arguments
5. Completeness of the reported work
6. Adequacy of acknowledgment of the past related work by others, in the reference list
7. Organization and composition of the manuscript, which must have:
  - Definition of the objective
  - Justification of the objective
  - Accomplishment of the objective
  - Description of the method of the study
  - Clear presentation and discussion of the results
  - Validation of the results
  - Comparison to the results by others
  - Concise conclusions/recommendations
  - Clarity and good expression in English, and of tables and illustrations
  - Appropriate length

## Open Access Policy

USER

Username

Password

Remember me



1.2 2021 CiteScore

31st percentile Powered by Scopus

1.5 2022 CiteScoreTracker

31st percentile Powered by Scopus

International Energy Journal

Q3 Energy (miscellaneous) best quart

SJR 2021 0.24 powered by scimagojr.co

JOURNAL CONTENT

Search

Search Scope

All

Browse

- » By Issue
- » By Author
- » By Title

FONT SIZE

## OPEN ACCESS POLICY

All research articles published in the International Energy Journal are fully open access: immediately freely available to read, download and share provided the original work is properly cited.

## Archiving

This journal utilizes the LOCKSS system to create a distributed archiving system among participating libraries and permits those libraries to create permanent archives of the journal for purposes of preservation and restoration. [More...](#)

## About RERIC

The Regional Energy Resources Information Center (RE RIC) was established in May 1978 at the Asian Institute of Technology (AIT) in Thailand under the joint sponsorship of the Institute's Agricultural and Food Engineering Division and the Library and Regional Documentation Center (LRDC). It is now affiliated with the Energy Program of the Department of Energy, Environment and Climate Change under the School of Environment, Resources and Development (SERD) of AIT.

RE RIC was established as a result of recommendations made at various meetings held in Asia, and particularly as an answer to a meeting of experts in the field of solar and wind energy utilization held in Bangkok in 1976 under the energy program of the United Nations Economic and Social Commission for Asia and the Pacific (UN-ESCAP).

RE RIC has grown fast since 1978 and, at present, it is a full member of the Regional Steering Committee of the UNESCO Sub-Regional Information Network on New and Renewable Sources of Energy. The center is also one of the special sectoral sources of UNEP's INFOTERRA environmental information network and the primary contact point for the Energy and Environment Information System (EIS) in Thailand. RE RIC is also one of the nodes of Thailand Energy and Environment Network (TEENET) established as part of the energy conservation program of the Energy Policy and Planning Office (EPPO) of the Royal Thai Government.

## Advisory and Editorial Board

International Energy Journal EDITORIAL BOARD	
<b>Professor Ferdinand E. Banks</b>	Uppsala University, Uppsala, SWEDEN
<b>Professor Harry Clarke</b>	La Trobe University, Victoria, AUSTRALIA
<b>Professor Ogunlade R. Davidson</b>	University of Sierra Leone, Freetown, SIERRA LEONE
<b>Professor R.H.B. Exell</b>	King Mongkut's University of Technology Thonburi, Bangkok, THAILAND
<b>Professor Martin A. Green</b>	University of New South Wales, Sydney, AUSTRALIA
<b>Dr. Kejun Jiang</b>	Energy Research Institute, Beijing, CHINA
<b>Professor Shinsuke Kato</b>	Institute of Industrial Science, University of Tokyo, Tokyo, JAPAN
<b>Professor D.P. Kothari</b>	Vellore Institute of Technology University, Tamilnadu, INDIA
<b>Professor S. Kumar</b>	Asian Institute of Technology, THAILAND
<b>Professor Hoesung Lee</b>	Keimyung University, Daegu, SOUTH KOREA
<b>Dr. Erik Lysen</b>	Utrecht University, Utrecht, THE NETHERLANDS
<b>Professor Saeid Mokhtab</b>	University of Wyoming, Wyoming, USA
<b>Professor Saifur Rahman</b>	Virginia Polytechnic Institute and State University, Virginia, USA
<b>Professor Tapan Kumar Saha</b>	University of Queensland, Brisbane, AUSTRALIA
<b>Professor P.R. Shukla</b>	Indian Institute of Management, Ahmedabad, INDIA
<b>Professor Somchart Soponronnarit</b>	King Mongkut's University of Technology Thonburi, Bangkok, THAILAND
<b>Dr. Leena Srivastava</b>	The Energy and Resources Institute (TERI), New Delhi, INDIA

## NOTIFICATIONS

- » [View](#)
- » [Subscribe](#)

## [OPEN JOURNAL SYSTEMS](#)

## [JOURNAL HELP](#)



<b>Dr. S.V. Szokolay</b>	University of Queensland, Brisbane, AUSTRALIA
<b>Dr. Govinda R. Timilsina</b>	The World Bank, Washington, District of Columbia, USA

**Asian Institute of Technology**  
REGIONAL ENERGY RESOURCES INFORMATION CENTER  
P.O.Box 4, Klong Luang, Pathumthani 12120, Thailand





HOME ABOUT LOGIN SEARCH CURRENT ARCHIVES ANNOUNCEMENTS SUBMISSION

Home > Archives > **Volume 20, Issue 4, December 2020**

## Volume 20, Issue 4, December 2020

### Table of Contents

#### Articles

##### A Flexible DC-DC Converter for the Battery - DC Bus Renewable Energy System

*Pham Ngoc Thang, Vo Thanh Vinh, Nguyen The Vinh*

PDF

##### Economic Viability Analysis of Wind Energy in Nepal

*Raju Laudari, Kamal Banskota, Balkrishna Sapkota*

PDF

##### Hydrolysis of Microalgae *Spirulina platensis*, *Chlorella sp.*, and Macroalgae *Ulva lactuca* for Bioethanol Production

*Kusmiyati Kusmiyati, Agnes Heratri, Sinju Kubikazari, Arif Hidayat, Hadiyanto Hadiyanto*

PDF

##### Preparation of Biomass Briquettes using Durian Peel Char and Spent Mushroom Compost Char

*Kittiphoom Suppalakpanya, Ruamporn Nikhom, Suwattana Nikhom*

PDF

##### Continuous Water Absorption - Regeneration using Microbubble Technology for CO<sub>2</sub> Removal in Biogas Upgrading System

*Jiraporn Paoaiang, Chananchida Dumruangsri, Narong Chaisongkroh, Sudarat Tinchana, Juntima Chungsiriporn*

PDF

##### Improvement of Heat Transfer on Solid Fuel Combustor System Using Waste Steel Nuts as Porous Media

*Buncha Puttakoon, Boonrit Prasartkaew, Kitipong Jaojaruek*

PDF

##### Does COVID-19 Crisis Affects the Spillover of Oil Market's Return and Risk on Thailand's Sectoral Stock Return?: Evidence from Bivariate DCC GARCH-in-Mean Model

*Napon Hongsakulvasu, Chatchai Khiewngamdee, Asama Liamukda*

PDF

USER

Username

Password

Remember me

Login



Scopus<sup>®</sup>



1.2 2021 CiteScore

31st percentile  
Powered by Scopus

1.5 2022 CiteScoreTracker

31st percentile  
Powered by Scopus

International Energy Journ

Q3 Energy (miscellaneous) best quart

SJR 2021 0.24  
powered by scimagojr.co

JOURNAL CONTENT

Search

Search Scope  
All

Search

Browse

- » By Issue
- » By Author
- » By Title

FONT SIZE



NOTIFICATIONS

- » [View](#)
- » [Subscribe](#)

[OPEN JOURNAL SYSTEMS](#)

[JOURNAL HELP](#)

**Asian Institute of Technology**  
REGIONAL ENERGY RESOURCES INFORMATION CENTER  
P.O.Box 4, Klong Luang, Pathumthani 12120, Thailand