

Experiment to Determine Worker Needs Index in Brick Work with Space Mold Tools

by Albani Musyafa

Submission date: 09-Aug-2024 04:50PM (UTC+0700)

Submission ID: 2429476625

File name: SCESCM-Experiment.pdf (1.27M)

Word count: 8218

Character count: 47225

Lecture Notes in Civil Engineering

COUNTRY

Switzerland



Universities and research institutions in Switzerland



Media Ranking in Switzerland

SUBJECT AREA AND CATEGORY

Engineering
└ Civil and Structural Engineering

PUBLISHER

Springer Singapore

H-INDEX

25

PUBLICATION TYPE

Book Series

ISSN

23662557, 23662565

COVERAGE


1975, 2016-2024

INFORMATION

[Homepage](#)

[How to publish in this journal](#)

giovanni.solari@unige.it

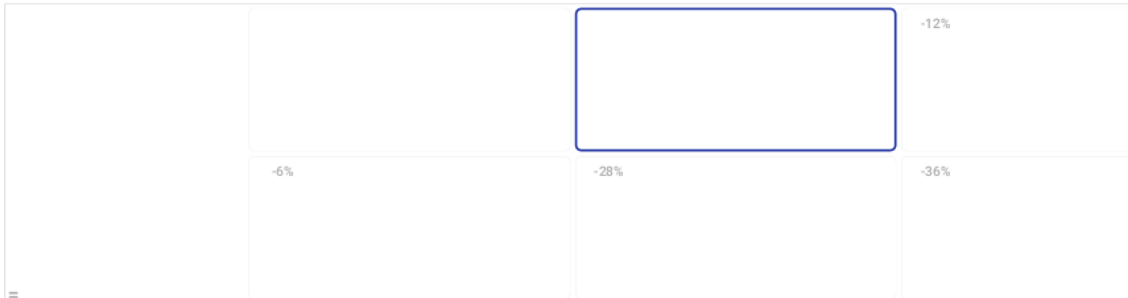

SCOPE

Lecture Notes in Civil Engineering (LNCE) publishes the latest developments in Civil Engineering - quickly, informally and in top quality. Though original research reported in proceedings and post-proceedings represents the core of LNCE, edited volumes of exceptionally high quality and interest may also be considered for publication. Volumes published in LNCE embrace all aspects and subfields of, as well as new challenges in, Civil Engineering.














SAVE UP TO
YOU STAY LO...
Five-Star L...
With Complimenta...

Quartiles



Rp26.499.0...	Rp17.499.0...	Rp31.999.0...	Rp17.499.0...	Rp28.499.0...	Rp28.499.0...	Rp17.499.0...	Rp19.499.0...	Rp17.49
---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------

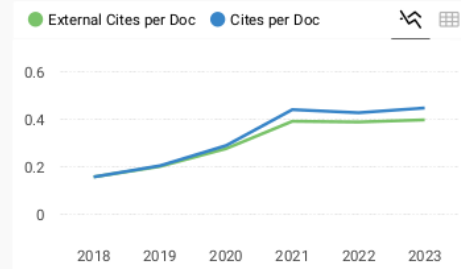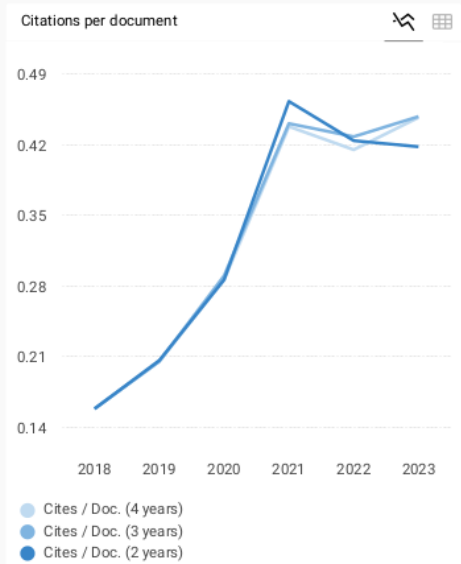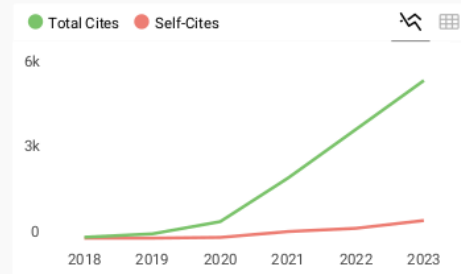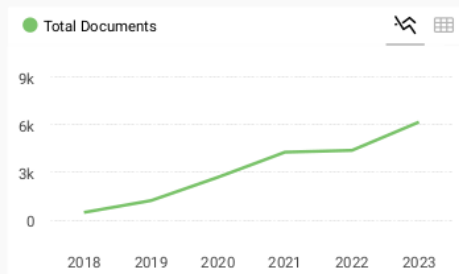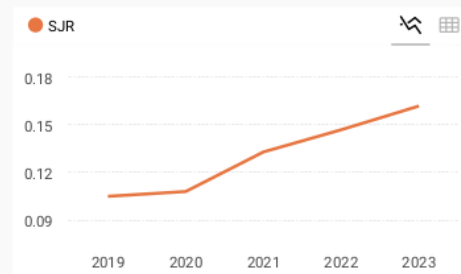

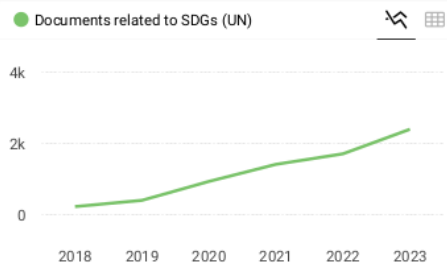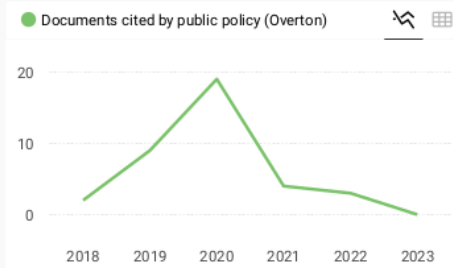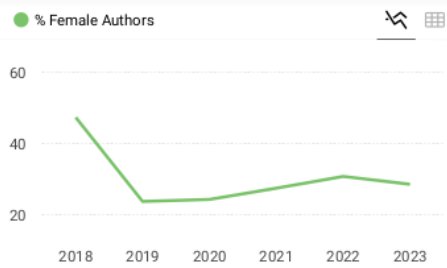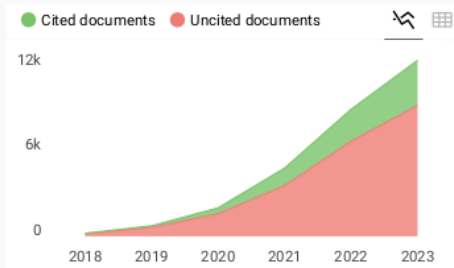

Lecture Notes in Civil Engineering

Q4 Civil and Structural Engineering
best quartile

SJR 2023 0.16

powered by scimagojr.com

Show this widget in your own website

Just copy the code below and paste within your html code:

```
<a href="https://www.scimagojr.com" style="color: #0070C0; text-decoration: none;">

```

SCImago Graphica

Explore, visually [communicate](#) and make sense of data with our **new data visualization tool**.

Metrics based on Scopus® data as of March 2024

B MAHENDRA 3 years ago

im an post graduate student in structural engineering, how much time it will take for acceptance and publishing the journal

reply

Melanie Ortiz 3 years ago

SCImago Team

Dear Mahendra,
Thank you for contacting us.
We suggest you visit the journal's homepage or contact the journal's editorial staff , so they could inform you more deeply.
Best Regards, SCImago Team



Source details

Lecture Notes in Civil Engineering

Years currently covered by Scopus: 1975, from 2016 to 2024

Publisher: Springer Nature

ISSN: 2366-2557 E-ISSN: 2366-2565

Subject area: Engineering: Civil and Structural Engineering

Source type: Book Series

CiteScore 2023

0.8



SJR 2023

0.162



SNIP 2023

0.253



[View all documents >](#)

[Set document alert](#)

[Save to source list](#)

[CiteScore](#) [CiteScore rank & trend](#) [Scopus content coverage](#)

CiteScore 2023 ▼

$$0.8 = \frac{12,939 \text{ Citations } 2020 - 2023}{17,058 \text{ Documents } 2020 - 2023}$$

Calculated on 05 May, 2024

CiteScoreTracker 2024 ⓘ

$$0.6 = \frac{10,820 \text{ Citations to date}}{18,469 \text{ Documents to date}}$$

Last updated on 08 July, 2024 • Updated monthly

CiteScore rank 2023 ⓘ

Category	Rank	Percentile
Engineering		
Civil and Structural Engineering	#326/379	14th

[View CiteScore methodology >](#) [CiteScore FAQ >](#) [Add CiteScore to your site](#)

Lecture Notes in Civil Engineering

Sheila Belayutham ·
Che Khairil Izam Che Ibrahim ·
Anizahyati Alisibramulisi ·
Hazrina Mansor · Muntasir Billah *Editors*

Proceedings of the 5th International Conference on Sustainable Civil Engineering Structures and Construction Materials

SCESCM 2020

 Springer

Lecture Notes in Civil Engineering

Volume 215

Series Editors

Marco di Prisco, Politecnico di Milano, Milano, Italy

Sheng-Hong Chen, School of Water Resources and Hydropower Engineering,
Wuhan University, Wuhan, China

Ioannis Vayas, Institute of Steel Structures, National Technical University of
Athens, Athens, Greece

Sanjay Kumar Shukla, School of Engineering, Edith Cowan University, Joondalup,
WA, Australia

Anuj Sharma, Iowa State University, Ames, IA, USA

Nagesh Kumar, Department of Civil Engineering, Indian Institute of Science
Bangalore, Bengaluru, Karnataka, India

Chien Ming Wang, School of Civil Engineering, The University of Queensland,
Brisbane, QLD, Australia

Lecture Notes in Civil Engineering (LNCE) publishes the latest developments in Civil Engineering - quickly, informally and in top quality. Though original research reported in proceedings and post-proceedings represents the core of LNCE, edited volumes of exceptionally high quality and interest may also be considered for publication. Volumes published in LNCE embrace all aspects and subfields of, as well as new challenges in, Civil Engineering. Topics in the series include:

- Construction and Structural Mechanics
- Building Materials
- Concrete, Steel and Timber Structures
- Geotechnical Engineering
- Earthquake Engineering
- Coastal Engineering
- Ocean and Offshore Engineering; Ships and Floating Structures
- Hydraulics, Hydrology and Water Resources Engineering
- Environmental Engineering and Sustainability
- Structural Health and Monitoring
- Surveying and Geographical Information Systems
- Indoor Environments
- Transportation and Traffic
- Risk Analysis
- Safety and Security

To submit a proposal or request further information, please contact the appropriate Springer Editor:

- Pierpaolo Riva at pierpaolo.riva@springer.com (Europe and Americas);
- Swati Meherishi at swati.meherishi@springer.com (Asia - except China, and Australia, New Zealand);
- Wayne Hu at wayne.hu@springer.com (China).

All books in the series now indexed by Scopus and EI Compendex database!

More information about this series at <https://link.springer.com/bookseries/15087>

Sheila Belayutham ·
Che Khairil Izam Che Ibrahim ·
Anizahyati Alisibramulisi · Hazrina Mansor ·
Muntasir Billah
Editors

Proceedings of the 5th
International Conference
on Sustainable Civil
Engineering Structures
and Construction Materials

SCESCM 2020

 Springer

Editors

Sheila Belayutham
School of Civil Engineering, College
of Engineering
Universiti Teknologi MARA
Shah Alam, Selangor, Malaysia

Che Khairil Izam Che Ibrahim
School of Civil Engineering, College
of Engineering
Universiti Teknologi MARA
Shah Alam, Selangor, Malaysia

Anizahyati Alisibramulisi
School of Civil Engineering, College
of Engineering
Universiti Teknologi MARA
Shah Alam, Selangor, Malaysia

Hazrina Mansor
School of Civil Engineering, College
of Engineering
Universiti Teknologi MARA
Shah Alam, Selangor, Malaysia

Muntasir Billah
Department of Civil Engineering
Lakehead University
Thunder Bay, ON, Canada

ISSN 2366-2557 ISSN 2366-2565 (electronic)
Lecture Notes in Civil Engineering
ISBN 978-981-16-7923-0 ISBN 978-981-16-7924-7 (eBook)
<https://doi.org/10.1007/978-981-16-7924-7>

© The Editor(s) (if applicable) and The Author(s), under exclusive license to Springer Nature Singapore Pte Ltd. 2022

This work is subject to copyright. All rights are solely and exclusively licensed by the Publisher, whether the whole or part of the material is concerned, specifically the rights of translation, reprinting, reuse of illustrations, recitation, broadcasting, reproduction on microfilms or in any other physical way, and transmission or information storage and retrieval, electronic adaptation, computer software, or by similar or dissimilar methodology now known or hereafter developed.

The use of general descriptive names, registered names, trademarks, service marks, etc. in this publication does not imply, even in the absence of a specific statement, that such names are exempt from the relevant protective laws and regulations and therefore free for general use.

The publisher, the authors and the editors are safe to assume that the advice and information in this book are believed to be true and accurate at the date of publication. Neither the publisher nor the authors or the editors give a warranty, expressed or implied, with respect to the material contained herein or for any errors or omissions that may have been made. The publisher remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

This Springer imprint is published by the registered company Springer Nature Singapore Pte Ltd. The registered company address is: 152 Beach Road, #21-01/04 Gateway East, Singapore 189721, Singapore

Contents

Structural and Material Engineering

Practical Measurement Method for Dynamic Structural Large Displacement Using a High-Speed Camera	3
Ashar Saputra and Aries Putra Purba	
Finite Element Analysis of CRTS III Slab Track Model	17
Mughtar Sufaat, Ali Awaludin, Iman Satyarno, Andreas Triwiyono, Akhmad Aminullah, Mukhlis Sunarso, and Guntar Muria Adityawarman	
Effect of Partial Replacement of Cement with Volcanic Ash on Mechanical Behaviour of Mortar	33
Md. Shahjalal, Jesika Rahman, Afia Farzana Haque, Lutful Habib, Khadiza Binte Jalal, and Mohd Mezanur Rahman	
Lateral Load–Displacement Behaviors of Reinforced Geopolymer-Concrete Column Using Finite Element Analysis	45
Kukuh Kurniawan Dwi Sungkono, Iman Satyarno, Henricus Priyosulistyo, and Indra Perdana	
Optimal Sensor Placement for Accelerometer in Single-Pylon Cable-Stayed Bridge	63
Akhmad Aminullah, Bambang Suhendro, and Raka Bagus Panuntun	
Seismic Performance of Instant Steel Frame House for Post Earthquake Reconstruction	81
Widarto Sutrisno, Iman Satyarno, Ali Awaludin, Ashar Saputra, and Angga Fajar Setiawan	
Nonlinear Numerical Model of Glued-Laminated Petung Bamboo Under Flexural Test Based on ASTM D 143-94	99
Abdul Widayat Abzarih, Inggar Septhia Irawati, and Bambang Suhendro	

Numerical Simulation Reinforcement of RC T-Beam with Carbon Fiber Reinforced Polymer (CFRP)	119
A. Mahendra, Muslikh, and A. S. Fajar	
Development Experimental Investigations of Truss Bridge Model for Vibration-Based Structural Health Monitoring	137
Sukamta, Angga Alfiannur, Susilo Adi Widyanto, and Han Ay Lie	
Parameter Identification of Bouc-Wen Model Using Firefly Algorithm	155
Richard Frans, Yoyong Arfiadi, and Junaedi Utomo	
Mechanical Properties of Fly Ash Bottom Ash (FABA) Geopolymer Hybrid Concrete Using Portland Cement	173
Monita Olivia, Rizky Noviandri, Gunawan Wibisono, and Iskandar Romey Sitompul	
Investigation of Confined Masonry Using Non-standard Quality of Concrete and Reinforcement	187
Andreas Triwiyono, I. Gusti Lanang Bagus Eratodi, Dian Eksana Wibowo, and Suprpto Siswosukarto	
Prospective of Passive Control Structural Devices for Existing Low-Rise Building at Earthquake-Prone Region of Developing Countries: A Literature Review	201
Yenny Nurchasanah, Bambang Suhendro, and Iman Satyarno	
Numerical Modelling of Concrete-Filled Steel Tube Columns Under Eccentric Loading	221
Joarder Md. Sarwar Mujib, Avijit Pal, Ibriju Ibrahim, and Tanvir Mustafy	
Maturity Method to Predict Strength Development of Concrete Made of Portland Cement Composite (PCC)	241
G. Turuallo, H. Mallisa, N. Rupang, and Z. Mallisa	
Study on Partial Replacement of Cement with Limonite in Mechanical Strength of Mortar	255
Md. Shahjalal, Jesika Rahman, Afia Farzana Haque, Lutful Habib, Khadiza Binte Jalal, and Mohd Mezanur Rahman	
Development of Numerical Model for Highly-Flowable Strain Hardening Fiber Reinforced Concrete (HF-SHFRC) Columns Subjected to Lateral Displacement Reversals and High Axial Loading Level	269
Wisena Perceka, Wen-Cheng Liao, and Li-Wei Tseng	

Mechanical Properties of Eco-Friendly Self-consolidating Concrete Containing Ground Granulated Blast Furnace Slag and Calcined Dolomite	285
Herry Suryadi Djayaprabha, Ta-Peng Chang, Jeng-Ywan Shih, and Hoang-Anh Nguyen	
An Overview of the Development of Replaceable Links in Eccentrically Braced Frame Steel Structures	297
Naomi Pratiwi, Helmy Hermawan Tjahjanto, and Muslinang Moestopo	
The Evaluation of Six Indonesian Hardwood Species According to SNI 7973:2013	311
Wiryanto Dewobroto, Christian Gerald Daniel, Ricky Weinata Kurniawan, and Au Chuenliana Audi	
Image Analysis of the Color Change on Concrete Surface Under the Change of Temperature and Humidity	329
Naoki Tosaka, Deng Pengru, and Takashi Matsumoto	
Dynamic Formation of Spontaneous Corrugation on Sand Surface Due to Repeated Loading of Moving Vehicle	349
Shunji Kanie, Hao Zheng, Kai Hashimoto, and Risa Endo	
Assessment and Back Analysis of a Swaying-Jetty in Dumai Indonesia	363
Merdeka Sandi Tazakka, M. Adecar Nugroho, and Budiwan Adi Tirta	
Seismic Assessment of Reinforced Concrete Frame with Unreinforced Masonry Infill Walls in Malaysia	379
Nurbaiah Mohammad Noh, Nur Izzah Aznin, Muhamad Hafizi Mohamed Zin, Muhammmad Azamuddin Mohd Ghari, Muhammad Ammar Zahari, and Muhammad Faiz Rushdi	
High Temperature Performance of Concrete Incorporating Recycled Glass Powders	391
Joarder Md Sarwar Mujib, Nayeem Ahmed Shuvo, Abu Bakar Siddique Ishmam, and Tanvir Mustafy	
The Effect of Palm Oil Fuel Ash (POFA) and Steel Fiber Addition to the Mechanical Properties of Ultra High Performance Concrete (UHPC)	405
Hafizuddin Zakare, Anizahyati Alisibramulisi, Muhd Norhasri Muhd Sidek, Aidan Newman, Nadiah Saari, Suraya Hani Adnan, and Norshariza Mohd Bhkari	

Investigation on Fire Resistance of Concrete Incorporating Recycled Ceramic Fine Aggregate	417
Joarder Md. Sarwar Mujib, Md. Maruf Hasan, Md. Rasel Molla, Tahsin Md. Zahid, and Tanvir Mustafy	
Image Analysis on the Deformation Behaviors of RC Beams with Simulated Deteriorations Under Moving Wheel Load Fatigue	435
Takamasa Nagai, Ko Kakuma, Hiroaki Nishi, Pengru Deng, and Takashi Matsumoto	
Investigation of Catalyzed Biomass Thermoelectric Concrete with Palm Oil Fuel Ash	451
Hoong-Pin Lee, Wan-Foong Chak, Kar-Loke Teow, Wen-Zhang Lee, Nurharniza Binti Abdul Rahman, and Abdullah Zawawi Awang	
Examination on the Processes of Structural Performance Evaluation of SRC Deep Beams by FEA with NDT Results	465
Motonori Yasui, Deng Pengru, and Takashi Matsumoto	
Development of Time Histories Based on Shallow Crustal Earthquake Sources Considering the New Version of the Indonesian Earthquake Map	483
Wisnu Erlangga, Mochamad Teguh, and Imam Trianggoro Saputro	
Bamboo Reinforced Concrete Beam	497
Nurharniza Abdul Rahman, Choo Li Rong, and Lee Hoong Pin	
Shear Strength Parallel to Grain for Selected Malaysian Tropical Timber According to BS EN408	511
M. B. Norshariza, W. C. Lum, Z. Ahmad, A. Alisibramulisi, and M. S. Nordin	
Effect of Pineapple Leaf Fibre as Additional Material in Concrete Mixture	525
Siti Khadijah Che Osmi, Mohamad Asrul Zainuddin, Noor Aina Misnon, Suriyadi Sojipto, and Hapsa Husen	
Flexural Behavior of SCC Beams with Different Shear Span to Effective Depth Ratio	539
Oh Chai Lian, Mohd Raizamzamani Md Zain, Norrul Azmi Yahya, Lee Siong Wee, and Balqis Md Yunos	
Flexural Strength and Ductility of Green Engineered Cementitious Composites Containing High Volumes of Fly Ash	553
Siong Wee Lee, Mohd Raizamzamani Md Zain, Chai Lian Oh, Norrul Azmi Yahya, and Nadiah Saari	

An Experimental Study on the Influence of Ground Granulated Blast-Furnace Slag (GGBS) on Bending Strength of Green Engineered Cementitious Composites	565
Mohd Raizamzamani Md Zain, Siong Wee Lee, Chai Lian Oh, Ching Hua Goh, and Norrul Azmi Yahya	
The Correlation Between Split Tensile and Flexural Strength with Compressive Strength of Crumb Rubber-Rice Husk Ash Concrete	581
Habib Abdurrahman, Gunawan Wibisono, Iskandar Romey Sitompul, and Monita Olivia	
Finite Element Dynamic Analysis of Double-Span Steel Beam Under an Instantaneous Loss of Support	593
Nur Ezzaryn Asnawi Subki, Hazrina Mansor, Yazmin Sahol Hamid, and Gerard A. R. Parke	
Effect of Replacement Area Ratio on Bearing Capacity Improvement of Peat Soil Columns Stabilized Using MUF-P Polymer Resin	611
Mohd Nazrin Mohd Daud, Nik Norsyahariati Nik Daud, and Jestin Jelani	
Ettringite: Influence of Steam Curing and Excessive Sulphate Content	625
M. Y. Balqis, H. M. K. Saiful, and M. M. Z. Raizamzamani	
Geoforensic Investigation of Cavity and Settlement for Abutment Bridge Using Electrical Resistivity Imaging	639
A. S. A. Rahman and I. B. M. Jais	
Strength Predictions of Normal Concrete Beam with Corner Notch	653
Hilton Ahmad and Noor Yasmin Zainun	
Structural Condition Assessment of a Log Bridge Under Heavy Traffic Load (Case Study: 105 Tons Gas Engine Delivery in Central Borneo Project)	669
Angga T. Yudhistira, Angga S. Fajar, Irfani N. Hud, Budi Suanda, and Ali Awaludin	
The Application of Inserted Steel Pipe as an Alternative Confinement Design in Reinforced Concrete Column Plastic Hinge Regions	685
Johanes Januar Sudjati, Iman Satyarno, Andreas Triwiyono, Bambang Supriyadi, and Angga Fajar Setiawan	

Influence of Solvable Connections on the Life Cycle Assessment of a Facade System	705
Leonie Scheuring, Melanie Werner, Franziska Rehde, and Bernhard Weller	
Seismic Performance Comparison of Pile Supported Slab Viaduct with PHC Pile and RC Bored Pile in South Part of Java Island	719
Muhamad Fauzi Darmawan, A. S. Fajar, Iman Satyarno, Ali Awaludin, and Bonifacius Adiguna Yogatama	
Finite Element Analysis for Developing Multi-direction Crossing Web Type Shear Panel Damper	735
N. U. Bagas, I. Satyarno, A. S. Fajar, A. Awaludin, and M. A. Guntara	
Numerical Model of Finned Tubular Shear Panel Damper for Multi-direction Seismic Excitation	751
A. M. Emilidardi, A. S. Fajar, A. Awaludin, I. Satyarno, and M. Sunarso	
Investigation of Fast Connection (Clamped Pocket Mechanics) for Modular Instant Steel House with Finite Element Analysis: Back to Build Post-disaster	767
A. S. Fajar, A. Saputra, I. Satyarno, and L. Himawan	
Method Assessment of Bridge Conditions Using Vibration Mode Patterns	787
Sukamta, Bagus Acung Billahi, Susilo Adi Widyanto, and Han Ay Lie	
Quantification of Bacteria Self-healing Efficiency on Concrete Cracks	803
M. S. Hamidah, H. Noor Hana, K. M. G. Iqmal, and K. Kartini	
Feasible Design Tensile Capacity of Post-installed Anchors Based on the New Eurocode 2: Part 4 (2018)	819
L. T. Ng, E. S. W. Wong, and D. T. W. Looi	
The Maximum Allowable Peak Ground Acceleration of a Six Storey Building Based on Micro Tremor and Numerical Analysis	837
Agustinus Sri Pandu and Henricus Priyosulistyo	
The Bond Strength and Damping Properties of Mortar Joint Using Rubber Tire Crumbs	857
Restu Faizah, Henricus Priyosulistyo, and Akhmad Aminullah	
Using Calcium Oxide and Accelerator to Control the Initial Setting Time of Mortar in 3D Concrete Printing	871
Antoni Antoni, David Christian Widjaya, Alexander Ricardo Koentjoro Wibowo, Jimmy Chandra, Pamuda Pudjisuryadi, and Djwantoro Hardjito	

Numerical Simulation of Spalling and Moisture Evaporation in Concrete Tunnel Linings Exposed to Fire	881
Zobaer Saleheen and Renga Rao Krishnamoorthy	
Optimization on Geometry Design of Double-Layer Space Trusses	895
Yazmin Sahol Hamid and Nurul Najihah Abd Rahim	
Numerical Investigation of Structural Behavior of Timber-Glass Composite Wall Panel	911
M. A. N. Abuzaid, M. K. Kamarudin, and M. Yussof	
Effect of Palm Oil Bottom Ash (POBA) on Concrete Mechanical Properties of Fresh and Hardened Ultra High Performance Concrete (UHPC)	929
Izzani Farhana Baharudin, Nurul Huda Suliman, Sakhiah Abdul Kudus, and Nuradila Izzaty Halim	
Impacts of Steel LNG Tank Aspect Ratio on Seismic Vulnerability Subjected to Near-Field Earthquakes	941
N. Sharari, B. Fatahi, A. Hokmabadi, and R. Xu	
Load–Displacement Behavior of Soil–Pile Interaction Under Lateral Action	957
Thevaneyan K. David and Renga Rao Krishnamoorthy	
Shear Failure of Pile in Clay Due to Soil–Structure Interaction	973
Thevaneyan Krishta David, Syahrie Safri Peter, and Renga Rao Krishnamoorthy	
RC Beams Strengthened with Near Surface Mounted Carbon Fiber Reinforced Polymer Plate at Short Term Saltwater Exposure	987
Amiruddin Mishad, Mohd Hisbany Mohd Hashim, Azmi Ibrahim, Mohammad Hazizi Jamal, and Dicken Anak Baboh	
Assessment on Bonding Strength of Cross Laminated Timber Made from Light Red Meranti Manufactured by Vacuum Press Method	999
M. S. Nordin, M. B. Norshariza, W. C. Lum, N. S. Zainal, and Z. Ahmad	
Effect of Kenaf Core to the Physical Properties of Cement-Sand Brick for Non-load Bearing Walls	1013
Mohd Fadzil Arshad, Nurul Aini Salehuddin, Zakiah Ahmad, Mohd Zaim Mohd Nor, and Abdul Hadi Hassan	

Bond Strength of Different Mechanically Rebar-Spliced Embedded in Concrete Under Pull Out Test	1027
Nursafarina Ahmad, Nur Fitriah Mohd Rohzi, N. S. N. Ain Fatimah Nik Mahmood, and M. Hadri Hamidun	
Construction Management	
Construction Supply Chains for Strategic Materials of Building Contractors in the Greater Bandung Areas	1045
I. Made Bhisma Pranandya, F. S. C. S. Maisarah, and Muhamad Abduh	
Social Sustainability in Education: An Insight into the Civil Engineering Curricular	1063
Nurul Elma Kordi, Sheila Belayutham, Che Khairil Izam Che Ibrahim, and Nur Shuhada Nor Shahrudin	
Legacy of the Games: Portable Architecture Transforming the Host City—The Pre-game, Game and Post-game Phase	1077
Shivangi Varma and Himanshu Sanghani	
Cost Structure Identification for Third-Party Logistics Services in Construction Projects	1107
Fauziah S. C. S. Maisarah and Muhamad Abduh	
Constraint and Fault Tree Analysis in Safety Construction System Integration	1119
N. Fitri, A. Bhaskara, and A. Purbiantoro	
Identifying Competency of Housing Construction Personnel in Indonesia	1137
Albani Musyafa', Dhanoë Seto Nugroho, and Nelly Buldan Afifa Hidayati	
Experiment to Determine Worker Needs Index in Brick Work with Space Mold Tools	1151
Albani Musyafa', Irsyad Hanif Ansori, and Muchammad Rizky Anugrah	
Development of Entry Mode Assessment Criteria (EMAC) Model for Malaysian Construction Companies to Sustain in International Operations	1161
Norizzati Ibrahim and Che Maznah Mat Isa	
Development of Automated Web-Based Condition Survey System for Heritage Monuments Using Deep Learning	1179
Lukman E. Mansuri and D. A. Patel	

Developing Indicators of Green Operation and Maintenance of Green Supply Chain Management in Construction Industry	1193
Mochamad Agung Wibowo, Naniek Utami Handayani, and Nur Farida	
Proposed Workflow of 3D Modelling Conversion and Enhancement in Quantity Surveying Profession	1207
Lam Tatt Soon, Hasnanywati Hassan, Nazirah Zainul Abidin, Myzatul Aishah Kamarazaly, Boon Tik Leong, and Kenn Jhun Kam	
Industry 4.0 in the Malaysian Construction Industry and Its Adoption Challenges	1223
Mohd Afiq Azinuddin Bin Tayib, Nor Azmi Bakhary, and Che Khairil Izam Che Ibrahim	
Customers' Interests in Sustainable Townships and Smart Housing Features in Malaysia	1235
Sahithi Ajarapu, Che Maznah Mat Isa, Divya Ganesan, Nur Kamaliah Mustaffa, Ahmad Yazed Yahaya, and Christopher Nigel Preece	
Technology? Financial Viability or What? Challenges and Benefits of Eco and Reflective Roof in Malaysia	1251
Boon Tik Leong, Cheng Fern Tey, Lam Tatt Soon, Kenn Jhun Kam, and Fuey Lin Ang	
Reviewing Quality Control Management of Road Construction Projects	1261
Debby Willar, Anak Agung Diah Parami Dewi, and Febriane P. Makalew	
Review of Previous Research Methods in Evaluating BIM Investments in the AEC Industry	1273
Jeri Adin Ardani, Christiono Utomo, Yani Rahmawati, and Cahyono Bintang Nurcahyo	
Sustainable Built Environment	
Seismic Performance Evaluation of Horseshoe Tunnel on Weathered-Sedimentary Rock Formation	1289
J. R. K. Nur Aji, A. S. Fajar, T. F. Fathani, and W. Wilopo	
Sustainable Construction and Its Challenges	1305
Adhilla Ainun Musir, Siti Rashidah Mohd Nasir, Siti Hafizan Hassan, Nur Farah Asyikin Abdul Rahim, and Nurul Farah Afiqah Harun	
Removal of Nutrients, Organic Matter and Total Suspended Solids from River Water by Adsorption on Chicken Eggshell	1319
Wen-Pei Low, Fung-Lung Chang, and Shwu Ying Loo	

Effect of Roofing Material on the Quality of Harvested Rainwater	1335
Nordila Ahmad, Muhammad Faiz, Zuliziana Suif, Maidiana Othman, and Siti Khadijah Che Osmi	
Impact of Proposed Bus Rapid Transit (BRT) Peshawar on Modal Shares of Private Modes	1347
Jawad Mehmood, Sameer-Ud-Din, Muhammad Jawed Iqbal, and Nasir Ali	
Design of Groundwater Filter Media Using Activated Carbon for Emergency Purpose	1357
Zuliziana Suif, Siti Khadijah Che Osmi, Maidiana Othman, Nordila Ahmad, and Adam Muhammad Ezzat Aripin	
Prediction of HMA Mixture Performance from Rheological and Rutting Evaluation of Nanopolymer Asphalt Binder	1371
Ekarizan Shaffie, Ahmad Kamil Arshad, Juraidah Ahmad, Wardati Hashim, Ramadhansyah Putra Jaya, Khairil Azman Masri, Mohd Amin Shafii, and Haryati Yacoob	
Study on Nitrogen Removal Capability of Selected Regional Sewage Treatment Plants in Klang Valley, Malaysia	1385
Suzana Ramli, Jurina Jaafar, and Raja Baharudin Raja Mohamad	
Sustainable Use of Plastic Waste on Laterite Soil as Stabilizer	1397
Nurul Ain Binti Ibrahim, Tan Jia Jun, Muhammad Irfan Shahrin, and Nur'Ain Mat Yusof	
Exploration of Palm Kernel Use in Construction: A Review	1411
Donald Kwabena Dadzie, A. K. Kaliluthin, and D. Raj Kumar	
Evaluation of the Physical and Mechanical Properties of Concrete with Partial Replacement of Coarse Aggregates with Epoxy-Based E-Waste (EBEW)	1425
Joseph Berlin Juanzon and Jaime Aquino	
The Potential of Plastic Waste as Building Material	1441
Chong Lih Yen, Myzatul Aishah Kamarazaly, Soon Lam Tatt, Nurulhuda Hashim, Shirley Chin Ai Ling, and Azrina Md. Yaakob	
Identification Characteristic of Energy Efficient Timber House	1465
Febriane Paulina Makalew, Rilya Rumbayan, and Novatus Senduk	
The Effect of Dominant Rainfall Duration on the Planning of Dimensions of Infiltration Well and the Reduction of Surface Runoff	1477
Sri Amini Yuni Astuti and Dinia Anggraheni	

Evaluation of Hot Mix Asphalt Mixtures Design Modified with Hydrate Lime	1493
Noorfaizah Hamzah, Nur' Ain Mat Yusof, Adnan Derahman, and Mustaqim Mohamad	
Effectiveness of Waste Glass as Filler in Hot Mix Asphalt	1507
Noorfaizah Hamzah, Nur' Ain Mat Yusof, Adnan Derahman, and Ahmad Hafizi Rosely	
Evaluating the Impact of Junction Type on Emissions Level	1531
Masria Mustafa and Nur Amirah Mohammad Noor	

Experiment to Determine Worker Needs Index in Brick Work with Space Mold Tools



Albani Musyafa', Irsyad Hanif Ansori, and Muchammad Rizky Anugrah

Abstract Indonesian people are experiencing a huge backlog of decent housing. The data shows that almost a third of the houses in Indonesia are categorized as unfit for housing. This means the backlog can reach 22 million homes. This number continues to grow along with population growth and insufficient supply of livable homes. With these conditions, Indonesian people must increase the construction of livable homes. Brick wall houses are increasingly in demand by the community. Based on the government's program to increase the production of livable homes, the productivity of works in the construction of these houses must also be increased. One way to increase productivity is to use equipment that can speed up the process of installing spaces (mortar). For this reason, it is necessary to experiment with the use of these spacing molds in brick work. The purpose of this research was to determine the worker's need on the work of masonry wall with mortar spacing molds. The benefit that can be taken from this research is that the results can be used as a reference for construction services in estimating the productivity of laborers. With the increased productivity of this work, it is expected to help overcome the problem of the backlog. The experimental research object is the labor productivity of the couple's brick work. The research sample is a worker who works on residential development in Sleman, Yogyakarta. The data of this research are the results of the total time and effective time of the work of masonry performed by 18 masons. The calculation of work time is expressed in units of seconds. The production unit takes 70 bricks which is equivalent to 1 m². In conclusion, the index of need for workers on brick wall pair work is 0.7. The need was validated by t-test which showed that the use of this mortar spacing tool significantly increased productivity. Therefore, to

A. Musyafa' (✉) · I. H. Ansori · M. R. Anugrah
Civil Engineering, Universitas Islam Indonesia, JL. Kaliurang KM 14.5, Sleman Yogyakarta
55582, Indonesia
e-mail: 955110102@uii.ac.id

I. H. Ansori
e-mail: 17511078@students.uui.ac.id

M. R. Anugrah
e-mail: 17511213@students.uui.ac.id

© The Author(s), under exclusive license to Springer Nature Singapore Pte Ltd. 2022
S. Belayutham et al. (eds.), *Proceedings of the 5th International Conference on Sustainable Civil Engineering Structures and Construction Materials*, Lecture Notes in Civil Engineering 215, https://doi.org/10.1007/978-981-16-7924-7_74

1151

improve the productivity of masons in the work of masonry spaced molding tools should be used.

Keywords Productivity · Worker index · Masonry work · Space mold · Housing

1 Background

Shortage of appropriate housing in Indonesia today is still very large. Taking into account the rate of population growth and demolishing, the shortfall can be overcome if the production of livable homes in Indonesia reaches 2 million units per year over the next 25 years [1].

Because of the great need for the house, in 2015 the government launched a project of 1 million homes each year. However, to be able to meet the house production target that can be categorized as a high amount like that, we need a high amount of production. Therefore, it is necessary to increase production capacity. These efforts, one of which is the selection of work implementation methods that can produce material efficiency. These efficiency efforts must be developed in the process of building houses in Indonesia, from the beginning to the end of the process, as well as in small and large scope [2].

As the construction process in general, in the construction of houses, there is also material left over because it is wasted. In the work of masonry for walls, a lot of wasted material is mortar. This is due to the installation of mortar on the brick freely or does not have a mortar retaining system that allows the mortar not to fall. In reality, many of the fallen mortars were not taken any more so they were wasted. Mortar is composed of PC cement and tidal sand so that it has a significant value. In fact, the weight of this wall work is about 20% of the total construction cost [3].

Moreover, many workers do the work without using tools other than petting, resulting in widespread inefficiency of the mortar material. The volume of falling mortar can be reduced if the mortar installation is assisted by a mold that can withstand the fall of the mortar. This mortar mold has the function to form a species with a thickness and width as needed. In addition, this mold must be light enough so that it can be operated by a handyman. The significance of the use of these molds to reduce the volume of wasted mortar needs to be examined.

2 Purpose and Objective

The purpose of this study was to determine the efficiency of mortar requirements in the work of masonry walls using special molds.

3 Benefit

The results of this study can be used by implementers as information in determining the index of mortar needs in brickwork. In addition, the results of this study can also be used by related parties to persuade the public to do efficiency in the work of masonry pairs.

4 Literature Review

4.1 House Backlog

House backlog is one of the indicators used by the Government as stated in Rencana Strategis (Renstra) or strategic plan as well as Rencana Pembangunan Jangka Menengah (RPJMN) or Medium-term Development Plan related to the housing sector to measure the number of housing needs in Indonesia. House backlog can be measured from two perspectives, from the residential and ownership aspects.

House backlog from the perspective of occupancy is calculated by referring to the ideal calculation concept: 1 family occupies 1 house. The formula used to calculate a house backlog from an occupancy perspective is:

$$\text{Backlog} = \sum \text{Family} - \sum \text{House}$$

In the attachment of Book 1 of the Republic of Indonesia's Presidential Regulation Number 2 of 2015 concerning the 2015–2019 National Mid-Term Development Plan (RPJMN), the baseline backlog of residential homes in Indonesia in 2014 was 7.6 million.

The concept of inhabiting in the calculation of the backlog represents that each family is not required to have a house, but the Government facilitates/encourages every family, especially those who belong to Low Income Communities (MBR) can inhabit a decent home, either by leasing/contracting, buying/inhabiting their own home, or living in a house owned by relatives/family as long as the certainty of living (secure tenure).

Ownership backlog is calculated based on the home ownership rate/percentage of households (households) occupying their own home. The basic data source used in this calculation is sourced from BPS data.

In the context of utilizing data and information to support the implementation of the task of channeling and managing funds the FLPP (Fasilitas Likuiditas Pembiayaan Perumahan) or Housing Financing Liquidity Facility, PPDPP (Pusat Pengelolaan Dana Pembiayaan Perumahan) or Center for Housing Financing Management continue to utilize various strategic housing data. Please note that the first paragraph

of a section or subsection is not indented. The first paragraphs that follows a table, figure, equation etc. does not have an indent, either.

4.2 Brick Work

Basically, there are two building blocks for bricks, namely bricks and mortar. Brick is a building material in the form of blocks, generally measuring about $5 \times 11 \times 22$ cm, which is made from soil that is burned in high temperatures so that it has a certain strength and is not easily destroyed.

Mortar is a mixture of cement, sand and water with a certain composition with the function as a binding agent between bricks. When still wet, the mortar is soft, but after the binding process by the PC, the mortar will harden so that it has a certain compressive strength. Therefore, the mortar must have a certain thickness, dry time, and strength so that it is expected that the mortar holding the compressive force due to the load acting on it is not destroyed. There are 3 main constituents of mortar, namely cement, fine aggregate (sand) and water.

In accordance with practice in the field, there are several types of brick wall installation, one of which is a pair of $\frac{1}{2}$ stone, namely lengthwise brick installation with red brick width as the wall thickness. This type of couple is often found in residential construction.

Efforts for cost efficiency in the construction of residential houses can be done on brickwork. The work of brick masons has a significant weight on the construction of these houses.

Theoretically, the need for mortar is the specific volume between bricks in a masonry wall. The volume of this space can be calculated by the surface area of the space on the wall multiplied by the thickness of the wall or brick. Basically, the surface area of the wall consists of brick side and spaced surfaces. Thus, if in 1 square meter the walls are 70 pieces of brick size $5 \times 11 \times 22$ [4], then the volume of spacing is: $23,0001 \text{ cm}^3$. This means that the thickness of the space is approximately 1 cm in both horizontal and vertical spaces. Proportionally, if the spacing is 1.5 cm thick, the volume of spacing is $34,500 \text{ cm}^3$ or 0.0345 m^3 . However, this volume is a theoretical requirement. This need will be noted in experiments.

To achieve these research objectives, first look for the value of mortar needs in brick masonry work with methods that use spacing molds and methods that do not use spacing molds. From these two values, the efficiency of mortar requirements is determined.

4.3 Space Mold

In the field of construction, many tools are created or developed to make work more efficient. Efficiency can be obtained in terms of time, cost and quality [5]. In

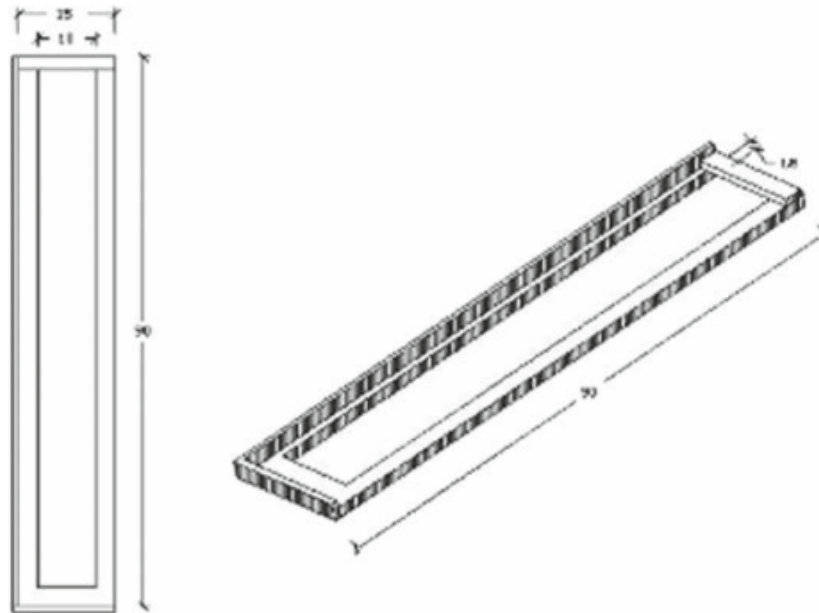


Fig. 1 Spacing mold

brickwork, a tool that can be used is a space mold. Besides making it tidier and easier to install mortar on bricks with mold aids can save the use of mortar because there's not that many mortars falling and is wasted.

Savings or efficiency in the use of mortar materials are the focus of this study. This efficiency means that by using this tool, the same volume of work can be achieved with less mortar [6]. In other words, with a smaller amount of mortar, will produce a product with the same volume.

The spacing tool used in this study is shown in Fig. 1. The way this tool works is: put the mold under the row of bricks to be installed; fill the mold with mortar; The mortar is lifted or moved; then the brick is placed on the printed mortar. This tool is made of wood with a size as shown in the picture.

4.4 Construction Worker

Explicitly, there is no definition of construction worker in the Law on Construction Services or PP on Business and the Role of the Construction Services Community. However, there is a requirement for Construction Workers as stipulated in Article 70 paragraph 1 of the UUK: "Every construction worker working in the Construction Services field must have a Work Competency Certificate."

In the 2017 UUK it is not explicitly mentioned who is included in the construction workforce. In fact, in the 1999 UUK there is information about who must have a work competency certificate (article 9).

Construction workers have certain classifications and qualifications. Construction workers are classified based on scientific fields related to construction services, namely:

- Architecture
- Civil
- Mechanical
- Environmental governance
- Implementation management

Construction workers are qualified in positions:

- Operator
- Technician or analyst
- Expert

Each qualification position is still divided into levels/levels according to their abilities and experience.

4.5 Productivity

Productivity is the ratio between the results of activities (outputs) and all the sacrifices (costs) to realize these results (inputs) [7]. Inputs can include production costs and equipment costs. While output can consist of sales, earnings (income), market share, and damage (defects) [8].

Many studies have shown that productivity is strongly influenced by factors: knowledge, skills, abilities, attitudes, and behaviors of workers in the organization so that many productivity improvement programs put these as basic assumptions [8].

Increasing productivity can be achieved by minimizing all kinds of costs including in utilizing human resources (do the right thing) and increasing output as much as possible (do the thing right) [9]. In other words that productivity is a reflection of the level of efficiency and total work effectiveness [10].

In general productivity is defined as the relationship between real and physical results (goods or services) with the actual entry [11]. Productivity is also defined as the level of efficiency in producing goods or services. Productivity is also interpreted as:

- (a) Comparison of price measures for inputs and results
- (b) The difference between a collection of total expenditure and inputs expressed in general units.

The best-known measure of productivity is related to labor which can be calculated by dividing expenditure by the amount used or the hours worked by people.

5 Method

This type of research is an experiment, namely by testing the two methods, namely using and not using a space print. Of the two types of methods tested, the volume of mortar data is used.

The steps in the research are as follows. Determine the size of the brick used is $5 \times 11 \times 22$ [4]. Determine the space between the bricks that is 1.5 cm both for vertical and horizontal. Determine the size of the wall area as an experimental cycle of 1 m^2 , half a stone thick, consisting of 70 bricks [4] with 4 layers of brick or horizontal spaces. Determine the composition of the ingredients making up mortar 1PC:8PP. Prepare sufficient mortar, determine the craftsman who will do the experiment, which consists of 7 workers who each do 3 times of experiment so that there are 21 times of experiment in each method. So that in total in this study there were 42 experiments. Then, record the need for mortar material for each experiment.

Data processing is done by comparing the average value of mortar use for each method. Validation is done by t test two related samples [12]. Experiments carried out in the area of Caturharjo, Sleman, Yogyakarta.

6 Result and Analysis

The results of 42 experiments, carried out in each method of implementation, can be seen in Table 1. The experiment was carried out by 7 workers, so each worker conducted 6 experiments with details of 3 experiments with mold equipment and 3 experiments without mold equipment.

Table 1 shows the volume of mortar needed in each experiment, whether or not using a spacebar. The volume of the mortar is calculated by reducing the volume of the mortar before installation with the volume of the remaining mortar. In this experiment mortar that fell in the installation process was not taken.

In general, the experiments carried out in this study went according to plan. Workers as an important part of the research instrument seems to be doing their job well. The experiment was considered to be going well because the standard deviations of the duration of the 2 methods were not too different i.e. 203,719 and 207,703. In addition, the duration of the implementation of the two experimental methods by workers has a correlation of 0.951 which can be interpreted that the workers perform two ways of carrying out experiments with the same conditions.

Theoretically, Table 2 shows that the amount of wasted mortar will be lowered if the brickwork is done with mold equipment. If using a spacing mold, the wasted mortar is 0.004 m^3 , whereas if without the mold, the wasted mortar is 0.0156 m^3 . The use of this mold can reduce wasted mortar by 0.152 per m^2 masonry. The table also shows that the use of molding tools in brick wall installation can save about 23% of the volume of mortar. These savings are proven to be consistent from the results of the t-test of two related samples [13].

Table 1 Mortar needs data for 1 m³ bricks

Sample	Production time with mold (s)	With mold (m ³)	Production time without mold (s)	Without mold (m ³)
1	1697	0.0416	1458	0.0523
2	1633	0.0403	1532	0.0502
3	1553	0.0396	1547	0.0530
4	1451	0.0396	1275	0.0502
5	1388	0.0406	1264	0.0495
6	1402	0.0396	1304	0.0516
7	1501	0.0374	1306	0.0516
8	1433	0.0385	1324	0.0502
9	1368	0.0388	1295	0.0502
10	1262	0.0353	986	0.0487
11	1187	0.0364	954	0.0195
12	1205	0.0346	1012	0.0480
13	1843	0.0360	1613	0.0495
14	1869	0.0364	1642	0.0484
15	1835	0.0360	1623	0.0487
16	1562	0.0410	1380	0.0480
17	1527	0.0381	1361	0.030484
18	1495	0.0392	1327	0.0491
19	1314	0.0385	1154	0.0509
20	1291	0.0410	1097	0.0519
21	1298	0.0374	1126	0.0516
Total	31,114	0.8059	27,580	1.0515
Average	1482	0.0384	1313	0.0501

Table 2 Primary data description

Data	Minimum	Maximum	Mean	Standard deviation
Work duration with mold	1187	1869	1481.62	203.719
M ³ mortar with mold	0.0346	0.0416	0.038376	0.0020371
Work duration without mold	954	1642	1313.33	207.703
M ³ mortar without mold	0.0480	0.0530	0.050071	0.0014917

As is known that the composition of the mortar is cement and sand with a ratio of 1:8. To find out the efficiency of the ingredients of mortar, which is cement and sand, the volume of each ingredient needs to be calculated. The calculation is based on the index of material needs.

Table 3 Table of material needs index

Material needs	Unit	Index
Red brick	Piece	70
PC	Kg	6.5
PP	M3	0.05

Table 4 Material requirements in brickwork work according to experiments

Material	With mold		Without mold	
	Cement	Sand	Cement	Sand
Volume	4.992 kg	0.0384 m ³	6.5 kg	0.05 m ³
Price (IDR)	1275	115,000	1275	115,000
Cost (IDR)	6364.8	4416	8287.5	5750
Total (IDR)	10,780.8		14,037.5	

Material requirements for installing 1 m² of red brick walls measuring 5 × 11 × 22 cm ½ brick thick, mixed species 1 PC:8 PP is as shown in Table 3 [4]. Please note that, the composition of 6.5 kg PC and 0.05 m³ of sand will form 1PC: 8 PS mortar of 0.05 m³ as well. This is because the grains of cement only fill cavities between the grains of sand. Therefore, the material requirements for brickwork in accordance with the specifications in this experiment can be determined according to Table 4.

The table shows the average value of the required volume of cement and sand material in each method of carrying out the work in the experiment. The cost for these ingredients can be determined by multiplying the volume of the material and the unit price of the material. Although, the price of the work unit consists of 3 (three) components, i.e.: unit price of material/material, unit price of labor wages, unit price of equipment [4], in this discussion only alludes to the cost component that comes from the material.

The cost of the couple's work can be seen in Table 4. Cost savings derived from materials obtained by using these spaced molding tools alone reach more than 23%. If the cost of the masonry work can be saved 23% and the cost of wall installation is 11% of the whole building [3], then the use of this tool alone can save costs about 2.5% of the total cost of home construction. By using this tool, the brickwork process is expected to be able to save more material needs. This is because the species mold tool is able to minimize wasting mortar. Even if it is carried out by skilled workers, this special molding tool is able to reduce the duration of the brickwork.

7 Conclusion and Suggestion

Based on the analysis and discussion that has been done, it can be concluded that the influence of the use of spaced molding tools on brickwork can save mortar by 23%,

or can save costs by 23.2% if using a mixture of 1PC: 8 PP. Besides saving material, the spacing molding tool also results in a tidier job. Therefore, to the construction implementer to be able to use the spacing molding tool in brickwork.

On a national scale, these savings will definitely be very meaningful. Moreover, the Indonesian people now still need the construction of millions of housing units each year [1]. The success of this development program is influenced by effective and efficient implementation methods. Therefore, the results of this study are expected to contribute to the success of the development program. Besides that, with the spaces mold, the results of the work should be tidier. This tidiness adds to the quality of construction results. Besides that, the tidiness also had a positive impact on the plastering work [6].

References

1. Musyafa A (2014) Balancing supply-demand of livable house in Indonesia based on demography backlog and demolishing (A model for the acceleration of appropriate housing pro-vision based on demographics, backlog and demolishing)
2. Sastra MS, Marlina E (2006) Perencanaan dan Pengembangan Perumahan. Yogyakarta
3. Musyafa A (2013) Komposisi Harga Jual Rumah Tinggal Layak Huni di Yogyakarta: Studi Kasus Pembangunan Rumah Tipe 90/115 di Luar Kompleks Perumahan
4. Standar Nasional Indonesia and Badan Standardisasi Nasional (2008) Tata cara perhitungan harga satuan pekerjaan besi dan aluminium untuk konstruksi bangunan gedung dan perumahan
5. Soeharto L (1995) Manajemen Proyek: dari Konseptual sampai Operasional. Erlangga, Jakarta
6. Musyafa A (2015) Eksperimen Untuk Menentukan Indeks Kebutuhan Tukang Pada Pekerjaan Pasangan Dinding Bata Dengan Alat Cetakan Spasi
7. Kussriyanto B (1984) Meningkatkan Produktivitas Karyawan. Gramedia, Jakarta
8. Gomes FC (1995) Manajemen Sumber Daya Manusia. Andi Offset, Yogyakarta
9. Manuaba A (1992) Pengaruh Ergonomi Terhadap Produktivitas
10. Tarwaka, Solichul H, Bakri, Sudiajeng L (2004) Ergonomi untuk Keselamatan, Kesehatan Kerja, dan Produktivitas. Surakarta: UNIBA PRESS
11. Sinungan M (2003) Produktivitas, Apa dan Bagaimana. Bumi Aksara, Bandung
12. Walpole RE, Raymond M (1996) Ilmu Peluang dan Statistika untuk Insinyur dan Ilmuwan (Terjemahan). Bandung
13. Santoso S (2000) Buku Latihan SPSS Statistik Parametrik. Elex Media Komputindo, Jakarta

Experiment to Determine Worker Needs Index in Brick Work with Space Mold Tools

ORIGINALITY REPORT

14%

SIMILARITY INDEX

15%

INTERNET SOURCES

12%

PUBLICATIONS

7%

STUDENT PAPERS

MATCH ALL SOURCES (ONLY SELECTED SOURCE PRINTED)

3%

★ Submitted to Tulane University

Student Paper

Exclude quotes On

Exclude bibliography On

Exclude matches < 1%